

MARINE ENVIRONMENT PROTECTION  
COMMITTEE  
67th session  
Agenda item 6

MEPC 67/INF.3  
25 July 2014  
ENGLISH ONLY

## REDUCTION OF GHG EMISSIONS FROM SHIPS

### Third IMO GHG Study 2014 – Final Report

#### Note by the Secretariat

#### SUMMARY

*Executive summary:* This document provides in the annex the complete final report of the "Third IMO GHG Study 2014", which provides an update of the estimated GHG emissions for international shipping in the period 2007 to 2012. The executive summary can also be found in document MEPC 67/6.

*Strategic direction:* 7.3

*High-level action:* 7.3.2

*Planned output:* 7.3.2.1

*Action to be taken:* Paragraph 1

*Related document:* MEPC 67/6

#### Action requested of the Committee

1 The Committee is invited to note the complete final report of the Third IMO GHG Study 2014, as the basis of the findings of the report's executive summary, set out in document MEPC 67/6.

\*\*\*



# Third IMO GHG Study 2014

## Executive Summary and Final Report, June 2014

Consortium members:



Data partners:



# Report Contents

|  |     |
|--|-----|
| Report Contents .....  | 1   |
| Report Figures .....   | 3   |
| Report Tables.....   | 7   |
| Preface.....   | 10  |
| List of abbreviations and acronyms .....   | 11  |
| Key definitions.....   | 12  |
| Executive Summary.....   | 13  |
| Key findings from the Third IMO GHG Study 2014 .....   | 13  |
| Aim and objective of the study .....   | 18  |
| Structure of the study and scope of work.....  | 19  |
| Summary of Section 1: Inventories of CO <sub>2</sub> from international shipping.....                                      | 20  |
| 2012 fuel consumption and CO <sub>2</sub> emissions by ship type.....  | 20  |
| 2007–2012 fuel consumption by bottom-up and top-down methods: Third IMO GHG Study 2014 and Second IMO GHG Study 2009 ..... | 21  |
| 2007–2012 trends in CO <sub>2</sub> emissions and drivers of emissions.....  | 25  |
| Summary of Section 2: Inventories of GHGs and other relevant substances from international shipping.....                   | 29  |
| Summary of Section 3: Scenarios for shipping emissions.....  | 32  |
| Maritime transport demand projections .....  | 32  |
| Maritime emissions projections .....   | 34  |
| Summary of the data and methods used (Sections 1, 2 and 3).....  | 37  |
| Key assumptions and method details .....   | 37  |
| Inventory estimation methods overview (Sections 1 and 2).....  | 37  |
| Scenario estimation method overview (Section 3) .....  | 41  |
| 1. Inventories of CO <sub>2</sub> from international shipping 2007–2012 .....  | 42  |
| 1.1. Top-down CO <sub>2</sub> inventory calculation method.....  | 42  |
| 1.1.1. Introduction .....  | 42  |
| 1.1.2. Methods for review of IEA data.....   | 42  |
| 1.1.3. Top-down fuel consumption results.....  | 43  |
| 1.2. Bottom-up CO <sub>2</sub> inventory calculation method.....   | 47  |
| 1.2.1. Overall bottom-up approach .....  | 47  |
| 1.2.2. Summary of data and method input revisions.....   | 48  |
| 1.2.3. Aggregation of ship types and sizes .....   | 50  |
| 1.2.4. Estimating activity using AIS data.....   | 51  |
| 1.2.5. Ship technical data .....   | 51  |
| 1.2.6. Sources and alignment/coverage of data sources .....  | 52  |
| 1.2.7. Bottom-up fuel and emissions estimation .....   | 54  |
| 1.2.8. Classification to international and domestic fuel consumption .....   | 54  |
| 1.3. Inventories of CO <sub>2</sub> emissions calculated using both the top-down and bottom-up methods .....               | 57  |
| 1.3.1. CO <sub>2</sub> emissions and fuel consumption by ship type .....   | 57  |
| 1.3.2. CO <sub>2</sub> and fuel consumption for multiple years 2007–2012 .....   | 61  |
| 1.3.3. Trends in emissions and drivers of emissions 2007–2012.....   | 63  |
| 1.3.4. Variability between ships of a similar type and size and the impact of slow steaming 67                             |     |
| 1.3.5. Shipping’s CO <sub>2</sub> e emissions .....  | 72  |
| 1.3.6. Shipping as a share of global emissions.....  | 73  |
| 1.4. Quality assurance and control of top-down and bottom-up inventories.....  | 76  |
| 1.4.1. Top-down QA/QC.....   | 76  |
| 1.4.2. Top-down QA/QC efforts specific to this study .....   | 78  |
| 1.4.3. Bottom-up QA/QC .....   | 80  |
| 1.4.4. Comparison of top-down and bottom-up inventories.....   | 102 |
| 1.5. Analysis of the uncertainty of the top-down and bottom-up CO <sub>2</sub> inventories.....                            | 106 |

|        |   |     |
|--------|---|-----|
| 1.5.1. | Top-down inventory uncertainty analysis.....  | 106 |
| 1.5.2. | Bottom-up inventory uncertainty analysis.....   | 107 |
| 1.6.   | Comparison of the CO <sub>2</sub> inventories in this study to the IMO GHG Study 2009 inventories.....    | 109 |
| 2.     | Inventories of emissions of GHGs and other relevant substances from international shipping 2007–2012..... | 114 |
| 2.1.   | Top-down other relevant substances inventory calculation method.....                                      | 114 |
| 2.1.1. | Method for combustion emissions.....  | 114 |
| 2.1.2. | Methane slip.....   | 115 |
| 2.1.3. | Method for estimation for non-combustion emissions.....   | 115 |
| 2.2.   | Bottom-up other relevant substances emissions calculation method.....                                     | 121 |
| 2.2.1. | Method.....   | 121 |
| 2.2.2. | Main engine(s).....   | 121 |
| 2.2.3. | Auxiliary engines.....  | 121 |
| 2.2.4. | Boilers.....  | 122 |
| 2.2.5. | Operating modes.....  | 122 |
| 2.2.6. | Non-combustion emissions.....   | 122 |
| 2.2.7. | Combustion emissions factors.....   | 123 |
| 2.3.   | Other relevant substances emissions inventories for 2007–2012.....  | 132 |
| 2.3.1. | Top-down fuel inventories.....  | 133 |
| 2.3.2. | Top-down GHG inventories.....   | 134 |
| 2.3.3. | Top-down pollutant emission inventories.....  | 134 |
| 2.3.4. | Bottom-up Fuel inventories.....   | 137 |
| 2.3.5. | Bottom-up GHG inventories.....  | 137 |
| 2.3.6. | Bottom-up pollutant inventories.....  | 138 |
| 2.4.   | Quality assurance and quality control of other relevant substances emissions inventories.....             | 139 |
| 2.4.1. | QA/QC of bottom-up emissions factors.....   | 139 |
| 2.4.2. | QA/QC of top-down emissions factors.....  | 141 |
| 2.4.3. | Comparison of top-down and bottom-up inventories.....   | 141 |
| 2.5.   | Other relevant substances emissions inventory uncertainty analysis.....                                   | 143 |
| 2.6.   | Other relevant substances emissions inventory comparison against IMO GHG Study 2009.....                  | 144 |
| 3.     | Scenarios for shipping emissions 2012–2050.....   | 147 |
| 3.1.   | Introduction.....   | 147 |
| 3.1.1. | Similarities and differences from IMO GHG Study 2009.....   | 147 |
| 3.1.2. | Outline.....  | 148 |
| 3.2.   | Methods and data.....   | 148 |
| 3.2.1. | The emissions projection model.....   | 148 |
| 3.2.2. | Base scenarios.....   | 149 |
| 3.2.3. | Transport demand projections.....   | 151 |
| 3.2.4. | Fleet productivity.....   | 153 |
| 3.2.5. | Ship size development.....  | 154 |
| 3.2.6. | EEDI, SEEMP and autonomous improvements in efficiency.....  | 155 |
| 3.2.7. | Fuel mix: market and regulation driven changes.....   | 156 |
| 3.2.8. | Emissions factors.....  | 157 |
| 3.3.   | Results.....  | 158 |
| 3.3.1. | Transport demand.....   | 158 |
| 3.3.2. | Projected CO <sub>2</sub> emissions.....  | 160 |
| 3.3.3. | Results for other substances.....   | 164 |
| 3.3.4. | Sensitivity to productivity and speed assumptions.....  | 165 |
| 3.3.5. | Uncertainty.....  | 166 |
| 3.4.   | Main results.....   | 166 |
|        | Bibliography for Main Report and Annexes.....   | 168 |

## Report Figures

|   |    |
|---|----|
| Figure 1: Bottom-up CO <sub>2</sub> emissions from international shipping by ship type 2012.....  | 20 |
| Figure 2: Summary graph of annual fuel consumption broken down by ship type and machinery component (main, auxiliary and boiler) 2012.....  | 21 |
| Figure 3: CO <sub>2</sub> emissions by ship type (international shipping only) calculated using the bottom-up .....   | 22 |
| Figure 4: Summary graph of annual fuel use by all ships, estimated using the top-down and bottom-up methods, showing Second IMO GHG Study 2009 estimates and uncertainty ranges. ....   | 23 |
| Figure 5: Summary graph of annual fuel use by international shipping, estimated using the top-down.....   | 23 |
| Figure 6 Time-series for trends in emissions and drivers of emissions in the oil tanker fleet 2007–2012. All trends are indexed to their values in 2007.....  | 25 |
| Figure 7: Time-series for trends in emissions and drivers of emissions in the containership fleet 2007-2012. All trends are indexed to their values in 2007.....  | 26 |
| Figure 8: Time series for trends in emissions and drivers of emissions in the bulk carrier fleet 2007–2012. All trends are indexed to their values in 2007.....   | 26 |
| Figure 9: Time series of bottom-up results for GHGs and other substances (all shipping). The green bar represents the Second IMO GHG Study 2009 estimate.....   | 30 |
| Figure 10: Time series of bottom-up results for GHGs and other substances (international shipping, domestic navigation and fishing). SO <sub>x</sub> values are preliminary and other adjustments may be made when fuel allocation results are finalised. ....  | 31 |
| Figure 11: Historical data to 2012 on global transport work for non-coal combined bulk dry cargoes.....   | 33 |
| Figure 12: Historical data to 2012 on global transport work for ship-transported coal and ....  | 33 |
| Figure 13: BAU projections of CO <sub>2</sub> emissions from international maritime transport 2012–2050. ....   | 34 |
| Figure 14: Projections of CO <sub>2</sub> emissions from international maritime transport. Bold lines are BAU scenarios. Thin lines represent either greater efficiency improvement than BAU or .....   | 34 |
| Figure 15: Projections of CO <sub>2</sub> emissions from international maritime transport under the.....  | 35 |
| Figure 16: Geographical coverage in 2007 (top) and 2012 (bottom), coloured according to the .....   | 39 |
| Figure 17: Total noon-reported quarterly fuel consumption of the main engine, compared with the bottom-up estimate over each quarter of 2012, with a filter to select only days with high reliability observations of the ship for 75% of the time or more..... | 41 |
| Figure 18: Oil products and products from other sources used in shipping (international, domestic and fishing) 1971–2011. ....  | 43 |
| Figure 19: IEA fuel oil sales in shipping 2007–2011. ....   | 45 |
| Figure 20: IEA gas/diesel sales in shipping 2007–2011.....  | 45 |
| Figure 21: IEA natural gas sales in shipping 2007–2011. ....  | 45 |
| Figure 22: Correlation between world GDP and international bunkers fuel oil during the recession.....   | 47 |
| Figure 23: Data assembly and method for Sections 1.2 and 2.2.....   | 48 |
| Figure 24: Chart showing the coverage of one of the merged AIS datasets used in this study (2012, all sources, but no LRIT).....  | 49 |
| Figure 25: Chart showing the coverage of one of the LRIT datasets used in this study( 2012). .....  | 49 |
| Figure 26: Venn diagram describing the sets of ships observed in the two main data types used in the bottom-up method (IHSF and AIS). ....  | 53 |
| Figure 27: Bottom-up CO <sub>2</sub> emissions from international shipping by ship type (2012). ....  | 57 |
| Figure 28: Summary graph of annual fuel consumption (2012), broken down by ship type and machinery component (main, auxiliary and boiler). ....   | 58 |
| Figure 29: CO <sub>2</sub> emissions by ship type (international shipping only), calculated from the bottom-up method for all years 2007–2012.....  | 61 |

|  |    |
|--|----|
| Figure 30: Summary graph of annual fuel use by all ships, estimated using the top-down and bottom-up methods.....  | 62 |
| Figure 31: Summary graph of annual fuel use by international shipping, estimated using the top-down and bottom-up methods. ....  | 63 |
| Figure 32: Average trends in the tanker sector 2007–2012, indexed to 2007. ....  | 65 |
| Figure 33: Average trends in the bulk carrier sector 2007–2012, indexed to 2007.....   | 65 |
| Figure 34: Average trends in the container sector 2007–2012, indexed to 2007.....  | 65 |
| Figure 35: Fleet total trends in the oil tanker sector (2007–2012), indexed to 2007. ....  | 66 |
| Figure 36: Fleet total trends in the bulk carrier sector (2007–2012), indexed to 2007. ....  | 66 |
| Figure 37: Fleet total trends in the container ship sector (2007–2012), indexed to 2007.....   | 66 |
| Figure 38: Variability within ship size categories in the bulk ship fleet (2012). Size category 1 is the smallest bulk carrier (0–9999dwt) and size category 6 is largest (200,000+dwt)..  | 67 |
| Figure 39: Variability within ship size categories in the container ship fleet (2012). Size category 1 is the smallest containerships (0–999 TEU) and size category 8 is the largest (14,500+ TEU).....  | 68 |
| Figure 40: Variability within ship size categories in the tanker fleet (2012). Size category 1 is the smallest oil tankers (0–9999dwt capacity) and size category 8 is the largest (200,000+dwt capacity).....   | 68 |
| Figure 41: Time series of bottom-up CO <sub>2</sub> e emissions estimates for a) total shipping, b) international shipping.....  | 73 |
| Figure 42: Comparison of shipping with global totals: a) CO <sub>2</sub> emissions compared, where percent shows international shipping emissions CO <sub>2</sub> as a percent of global CO <sub>2</sub> from fossil fuels; b) CO <sub>2</sub> e emissions compared, where percent shows international shipping emissions CO <sub>2</sub> e as a percent of global CO <sub>2</sub> e from fossil fuels. .... | 75 |
| Figure 43: OECD versus non-OECD data collection system.....  | 77 |
| Figure 44: Comparison of IEA and EIA international marine bunker fuel oil statistics. ....   | 79 |
| Figure 45: Confidence bands showing statistical difference between IEA and EIA data. ....  | 79 |
| Figure 46: Geographical coverage in 2007 and 2012, coloured according to the intensity of messages received per unit area. This is a composite of both vessel activity and geographical coverage, so the intensity is not solely indicative of vessel activity. ....   | 82 |
| Figure 47: The average volume of AIS activity reports for a region reported by a vessel for up to 300 randomly selected VLCCs (2007–2012).....   | 83 |
| Figure 48: Activity estimate quality assurance (2012).....   | 84 |
| Figure 49: Comparison of at-sea and at-port days are calculated from both the bottom-up model output (y-axis) and the noon report data (x-axis) (2012).....  | 86 |
| Figure 50: Comparison of at-sea and at-port days are calculated from both the bottom-up model output (y-axis) and the noon report data (x-axis) (2012).....  | 87 |
| Figure 51: Comparison of at-sea days and average ship speed, calculated from both the bottom-up model output (y-axis) and the noon report data (x-axis) (2009).....  | 88 |
| Figure 52: General boiler operation profile (Myśków & Borkowski 2012). ....  | 91 |
| Figure 53: Operational profile of an auxiliary boiler of a container vessel during six months of operations (Myśków & Borkowski 2012). ....  | 91 |
| Figure 54: Average noon-reported daily fuel consumption of the main and auxiliary engine, compared with the bottom-up estimate over each quarter of 2012.....  | 94 |
| Figure 55: Total noon-reported quarterly fuel consumption of the main and auxiliary engine, compared with the bottom-up estimate over each quarter of 2012.....  | 95 |
| Figure 56: Total noon-reported quarterly fuel consumption of the main engine, compared with the bottom-up estimate over each quarter of 2012, with a filter to select only days with high reliability observations of the ship for 75% of the time or more.....  | 96 |
| Figure 57: Total noon-reported quarterly fuel consumption of the main engine, compared with the bottom-up estimate over each quarter of 2007.....  | 96 |
| Figure 58: Total noon-reported quarterly fuel consumption of the main engine, compared with the bottom-up estimate over each quarter of 2009.....  | 97 |
| Figure 59: Total % in-service time for which high-reliability activity estimates are available from AIS. ....  | 99 |

|  |     |
|--|-----|
| Figure 60: Emissions weighted average of the total % of in-service time for which high-reliability activity estimates are available from AIS.....  | 100 |
| Figure 61: Top-down and bottom-up comparison for a) all marine fuels and b) international shipping.....  | 102 |
| Figure 62: Comparison of top-down fuel allocation with initial and updated bottom-up fuel allocation (2007–2012). .....  | 103 |
| Figure 63: Adjusted marine fuel sales based on quantitative uncertainty results (2007–2011). .....   | 107 |
| Figure 64: Summary of uncertainty on top-down and bottom-up fuel inventories for a) all ships and b) international shipping.....   | 108 |
| Figure 65: Top-down and bottom-up inventories for all ship fuels, from the IMO GHG Study 2014 and the IMO GHG Study 2009. ....   | 109 |
| Figure 66: Top-down and bottom-up inventories for international shipping fuels, from the IMO GHG Study 2014 and the IMO GHG Study 2009. ....   | 110 |
| Figure 67: Crossplots of deadweight tonnes, gross tonnes and average installed main engine power for the year 2007, as reported by the IMO GHG Study 2009 (x-axis) and the IMO GHG Study 2014 (y-axis).....  | 111 |
| Figure 68: Crossplots for days at sea, average engine load (%MCR) and auxiliary engine fuel use for the year 2007, as reported by the IMO GHG Study 2009 (x-axis) and the IMO GHG Study 2014 (y-axis).....   | 112 |
| Figure 69: Crossplots for average main engine daily fuel consumption and total vessel daily fuel consumption for 2007, as reported by the IMO GHG Study 2009 (x-axis) and the IMO GHG Study 2014 (y-axis).....   | 112 |
| Figure 70: Crossplots for main engine annual fuel consumption, total vessel annual fuel consumption, aggregated vessel type annual fuel consumption and CO <sub>2</sub> for the year 2007, as reported by the IMO GHG Study 2009 (x-axis) and the IMO GHG Study 2014 (y-axis). .....                   | 113 |
| Figure 71: Estimated refrigerant emissions of the global fleet 2007–2012. ....   | 120 |
| Figure 72: Impact of engine control parameter changes (ECT) to specific fuel oil consumption during low load operation of MAN 6S80ME-C8.2. Standard tuning is shown by the solid black line, part load optimisation by the solid blue line and low load tuning by the broken line (from MAN 2012)..... | 128 |
| Figure 73: Impact of engine load on brake-specific fuel consumption of various selected SSD, MSD and HSD engines (emissions factors by engine type). ....  | 130 |
| Figure 74: Comparison of PM emissions factors reported in IMO GHG Study 2009 [blue diamond] (Figure 7.7, based on data from Germanischer Lloyd) with values of Jalkanen et al. (2012) [red square] and with Starcrest (2013) [green triangle].....   | 132 |
| Figure 75: Time series of top-down results for a) CO <sub>2</sub> , b) CH <sub>4</sub> , c) N <sub>2</sub> O, d) SO <sub>x</sub> , e) NO <sub>x</sub> , f) PM, g) CO, and h) NMVOC, delineated by international shipping, domestic navigation and fishing.....   | 142 |
| Figure 76: Time series of bottom-up results for a) CO <sub>2</sub> , b) CH <sub>4</sub> , c) N <sub>2</sub> O, d) SO <sub>x</sub> , e) NO <sub>x</sub> , f) PM, g) CO, and h) NMVOC, delineated by international shipping, domestic navigation and fishing.....  | 143 |
| Figure 77: Time series of bottom-up results for a) CO <sub>2</sub> , b) CH <sub>4</sub> , c) N <sub>2</sub> O, d) SO <sub>x</sub> , e) NO <sub>x</sub> , f) PM, g) CO, and h) NMVOC. The green bar represents the IMO GHG Study 2009 estimate for comparison.....                                      | 146 |
| Figure 78: Schematic presentation of the emissions projection model.....   | 149 |
| Figure 79: Historical data on world coal and oil consumption, coal and oil transported (upper panel), total (non-coal) bulk dry goods, other dry cargoes and global GDP (lower panel). .....   | 153 |
| Figure 80: Historical data to 2012 on global GDP (constant 2005 US\$ billion/yr) coupled with projections of GDP from SSP1 through to SSP5 by 2050. ....   | 158 |
| Figure 81: Historical data to 2012 on global consumption of coals and oil (EJ/yr) coupled with projections from RCP2.6 through to RCP8.5 by 2050. ....   | 159 |



Figure 82: Historical data to 2012 on global transport work for non-coal combined bulk dry cargoes and other dry cargoes (billion tonne-miles) coupled with projections driven by GDPs from SSP1 through to SSP5 by 2050. ....159

Figure 83: Historical data to 2012 on global transport work for ship-transported coal and liquid fossil fuels (billion tonne-miles) coupled with projections of coal and energy demand driven by RCPs2.6, 4.5, 6.0 and 8.5 by 2050.....160

Figure 84: CO<sub>2</sub> emission projections. ....162

Figure 85: Emissions projections for the BAU transport demand scenarios.....163

Figure 86: Output for demand scenarios under conditions of high LNG/extra ECA and high efficiency. ....163

Figure 87: Specific output for scenario 15 (RCP4.5, SSP3, low LNG/no additional ECA, low efficiency). ....164

Figure 88: Impact of productivity assumptions on emissions projections. ....166

# Report Tables

- Table 1: a) Shipping CO<sub>2</sub> emissions compared with global CO<sub>2</sub> (values in million tonnes CO<sub>2</sub>); and b) Shipping GHGs (in CO<sub>2</sub>e) compared with global GHGs (values in million tonnes CO<sub>2</sub>e). .....14
- Table 2: International, domestic and fishing CO<sub>2</sub> emissions 2007–2011, using top-down method. ....24
- Table 3: International, domestic and fishing CO<sub>2</sub> emissions 2007–2012, using bottom-up method. ....24
- Table 4: Relationship between slow steaming, engine load factor (power output) and fuel consumption for 2007 and 2012.....28
- Table 5: Summary of the scenarios for future emissions from international shipping, GHGs and .....36
- Table 6: AIS observation statistics of the fleet identified in the IHSF database .....38
- Table 7: Comparison of 2011 and 2012 marine fuels reporting to IEA. ....43
- Table 8: Comparison of IMO GHG Study 2009 top-down ship fuel consumption data (million tonnes). ....44
- Table 9: Summary of the IEA fuels sales data in shipping (million tonnes). ....46
- Table 10: IHSF vessel types and related vessel classes. ....50
- Table 11: Classification of ships in the bottom-up approach. ....54
- Table 12: Summary of vessel types and sizes that can be expected to engage in international shipping. ....56
- Table 13: Summary of vessel types and sizes that can be expected to engage in domestic shipping. ....57
- Table 14: Tabular data for 2012 describing the fleet (international, domestic and fishing) analysed using the bottom-up method. ....59
- Table 15: International, domestic and fishing CO<sub>2</sub> emissions 2007–2011, using the top-down method. ....61
- Table 16: International, domestic and fishing CO<sub>2</sub> emissions 2007–2012, using the bottom-up method. ....62
- Table 17: Relationship between slow steaming, engine load factor (power output) and fuel consumption for 2007 and 2012.....71
- Table 18: Bottom-up CO<sub>2</sub>e emissions estimates with climate-carbon feedbacks from total shipping (thousand tonnes).....72
- Table 19: Bottom-up CO<sub>2</sub>e emissions estimates with climate-carbon feedbacks from international shipping (thousand tonnes). ....72
- Table 20: Shipping CO<sub>2</sub> emissions compared with global CO<sub>2</sub> (values in million tonnes CO<sub>2</sub>). .....73
- Table 21: Shipping CH<sub>4</sub> emissions compared with global CH<sub>4</sub> (values in thousand tonnes CH<sub>4</sub>). .....74
- Table 22: Shipping N<sub>2</sub>O emissions compared with global N<sub>2</sub>O (values in thousand tonnes N<sub>2</sub>O). .....74
- Table 23: Shipping GHGs (in CO<sub>2</sub>e) compared with global GHGs (values in million tonnes CO<sub>2</sub>e). ....74
- Table 24: Comparison of fuel sales data between IEA and EIA in international shipping (million tonnes). ....78
- Table 25: Summary of the findings on the QA of the bottom-up method estimated fuel consumption using noon report.....93
- Table 26: Observed, unobserved and active ship counts (2007–2012).....98
- Table 27: Statistics of the number of in-service ships observed on AIS and of the average amount of time during the year for which a ship is observed.....101
- Table 28: international, domestic and fishing CO<sub>2</sub> emissions 2007–2011, using top-down method. ....104
- Table 29: international, domestic and fishing CO<sub>2</sub> emissions 2007–2012, using bottom-up method. ....104

|  |     |
|--|-----|
| Table 30: Summary of average domestic tonnes of fuel consumption per year (2007–2012), MMSI counts and correlations between domestic fuel use statistics. ....   | 105 |
| Table 31: Upper range of top-down fuel consumption, by vessel type (million tonnes). ....  | 106 |
| Table 32: Results of quantitative uncertainty analysis on top-down statistics (million tonnes). ....   | 107 |
| Table 33: Summary of major differences between the IMO GHG Study 2009 and IMO GHG Study 2014. ....   | 113 |
| Table 34: Emissions factors for top-down emissions from combustion of fuels. ....  | 114 |
| Table 35: Year-specific emissions factors for sulphur-dependent emissions (SO <sub>x</sub> and PM). ....   | 115 |
| Table 36: Amounts of refrigerants carried by various types of ships (from DG ENV report). ....   | 117 |
| Table 37: Annual loss of refrigerants from the global fleet during 2012. Annual release of 40% total refrigerant carried is assumed except for passenger class vessels, where 20% refrigerant loss is assumed. Ro-Ro, Pax, Ro-Pax and cruise vessels are calculated as passenger ships. .... | 119 |
| Table 38: Global warming potential of refrigerants commonly used in ships. The GWP <sub>100</sub> is described relative to CO <sub>2</sub> warming potential (IPCC 4 <sup>th</sup> Assessment Report: Climate Change 2007). ....   | 120 |
| Table 39: Annual emissions of refrigerants from the global fleet and the estimated shares of different refrigerants. ....  | 121 |
| Table 40: Vessel operating modes used in this study. ....  | 122 |
| Table 41: NO <sub>x</sub> baseline emissions factors. ....   | 124 |
| Table 42: SO <sub>x</sub> baseline emissions factors. ....   | 125 |
| Table 43: Annual fuel sulphur worldwide averages. ....   | 125 |
| Table 44: PM baseline emissions factors. ....  | 126 |
| Table 45: CO baseline emissions factors. ....  | 126 |
| Table 46: CH <sub>4</sub> baseline emissions factors. ....   | 127 |
| Table 47: N <sub>2</sub> O baseline emissions factors. ....  | 127 |
| Table 48: NMVOC baseline emissions factors. ....   | 128 |
| Table 49: Specific fuel oil consumption of marine diesel engines (II values in g/kWh). ....  | 129 |
| Table 50: Specific fuel oil consumption (SFOC <sub>base</sub> ) of gas turbines, boiler and auxiliary engines used in this study as the basis to estimate dependency of SFOC as a function of load. Unit is grams of fuel used per power unit (g/kWh) (IVL 2004). ....                       | 129 |
| Table 51: Annual fuel sulphur worldwide averages. ....   | 131 |
| Table 52: Top-down fuel consumption inventory (million tonnes). ....   | 133 |
| Table 53: Top-down CH <sub>4</sub> emissions estimates (tonnes). ....  | 134 |
| Table 54: Top-down N <sub>2</sub> O emissions estimates (tonnes). ....   | 134 |
| Table 55: Top-down SO <sub>x</sub> emissions estimates (thousand tonnes as SO <sub>2</sub> ). ....   | 135 |
| Table 56: Top-down NO <sub>x</sub> emissions estimates (thousand tonnes as NO <sub>2</sub> ). ....   | 135 |
| Table 57: Top-down PM emissions estimates (thousand tonnes). ....  | 135 |
| Table 58: Top-down CO emissions estimates (thousand tonnes). ....  | 135 |
| Table 59: Top-down NMVOC emissions estimates (thousand tonnes). ....   | 137 |
| Table 60: Bottom-up fuel consumption estimates (million tonnes). ....  | 137 |
| Table 61: Bottom-up CH <sub>4</sub> emissions estimates (tonnes). ....   | 137 |
| Table 62: Bottom-up N <sub>2</sub> O emissions estimates (tonnes). ....  | 137 |
| Table 63: Bottom-up SO <sub>x</sub> emissions estimates (thousand tonnes as SO <sub>2</sub> ). ....  | 138 |
| Table 64: Bottom-up NO <sub>x</sub> emissions estimates (thousand tonnes as NO <sub>2</sub> ). ....  | 138 |
| Table 65: Bottom-up PM emissions estimates (thousand tonnes). ....   | 138 |
| Table 66: Bottom-up CO emissions estimates (thousand tonnes). ....   | 138 |
| Table 67: Bottom-up NMVOC emissions estimates (thousand tonnes). ....  | 138 |
| Table 68: Comparison of emissions factors IMO GHG Study 2009 and 2014. ....  | 140 |
| Table 69: Descriptions and sources of representative concentration pathways. ....  | 150 |
| Table 70: Short narratives of shared socio-economic pathways. ....   | 150 |
| Table 71: Ship type productivity indices used in emissions projection model. ....  | 154 |

Table 72: 2012 distribution and expected distribution 2050 of container and LG carriers over bin sizes. ....155

Table 73: 2012 distribution and expected distribution 2050 of oil/chemical tankers and dry bulk carriers over bin sizes.....155

Table 74: Fuel mix scenarios used for emissions projection (mass %). ....156

Table 75: NO<sub>x</sub> emissions factors in 2012, 2030 and 2050 (g/g fuel).....157

Table 76: HFCs used on board ships. ....158

Table 77: Overview of assumptions per scenario. ....161

Table 78: CO<sub>2</sub> emission projections.....162

Table 79: Emissions of CO<sub>2</sub> and other substances in 2012, 2020 and 2050.....165

## Preface

This study of greenhouse gas emissions from ships (hereafter the Third IMO GHG Study 2014) was commissioned as an update of the International Maritime Organization's (IMO) Second IMO GHG Study 2009. The updated study has been prepared on behalf of IMO by an international consortium led by the University College London (UCL) Energy Institute. The Third IMO GHG Study 2014 was carried out in partnership with the organizations and individuals listed below.

### Consortium members, organizations and key individuals.

| Organization                                      | Location         | Key individual(s)                   |
|---|------------------|-------------------------------------|
| UCL Energy Institute                              | UK               | Dr. Tristan Smith                   |
|   |                  | Eoin O'Keeffe                       |
|   |                  | Lucy Aldous                         |
|   |                  | Sophie Parker                       |
|   |                  | Carlo Raucci                        |
|   |                  | Michael Traut (visiting researcher) |
| Energy & Environmental Research Associates (EERA) | USA              | Dr. James J. Corbett                |
|   |                  | Dr. James J. Winebrake              |
| Finnish Meteorological Institute (FMI)            | Finland          | Dr. Jukka-Pekka Jalkanen            |
|   |                  | Lasse Johansson                     |
| Starcrest   | USA              | Bruce Anderson                      |
|   |                  | Archana Agrawal                     |
|   |                  | Steve Ettinger                      |
| Civic Exchange                                    | Hong Kong, China | Simon Ng                            |
| Ocean Policy Research Foundation (OPRF)           | Japan            | Shinichi Hanayama                   |
| CE Delft  | The Netherlands  | Dr. Jasper Faber                    |
|   |                  | Dagmar Nelissen                     |
|   |                  | Maarten 't Hoen                     |
| Tau Scientific                                    | UK               | Professor David Lee                 |
| exactEarth  | Canada           | Simon Chesworth                     |
| Emergent Ventures                                 | India            | Ahutosh Pandey                      |

The consortium thanks the Steering Committee of the Third IMO GHG Study 2014 for their helpful review and comments.

The consortium acknowledges and thanks the following organizations for their invaluable data contributions to this study: exactEarth, IHS Maritime, Marine Traffic, Carbon Positive, Kystverket, Gerabulk, V.Ships and Shell. In the course of its efforts, the consortium gratefully received input and comments from the International Energy Agency (IEA), the International Association of Independent Tanker Owners (INTERTANKO), the International Chamber of Shipping (ICS), the World Shipping Council (WSC), the Port of Los Angeles, the Port of Long Beach, the Port Authority of New York & New Jersey, the Environmental Protection Department of the HKSAR Government and the Marine Department of the HKSAR Government.

The views and conclusions expressed in this report are those of the authors.

The recommended citation for this work is: Third IMO GHG Study 2014; International Maritime Organization (IMO) London, UK, June 2014; Smith, T. W. P.; Jalkanen, J. P.; Anderson, B. A.; Corbett, J. J.; Faber, J.; Hanayama, S.; O'Keeffe, E.; Parker, S.; Johansson, L.; Aldous, L.; Raucci, C.; Traut, M.; Ettinger, S.; Nelissen, D.; Lee, D. S.; Ng, S.; Agrawal, A.; Winebrake, J. J.; Hoen, M.; Chesworth, S.; Pandey, A.

## List of abbreviations and acronyms

|         |   |
|---------|---|
| AIS     | Automatic Identification System   |
| AR5     | Fifth Assessment Report of the IPCC                                       |
| BAU     | business as usual   |
| BSFC    | brake-specific fuel consumption   |
| DG ENV  | Directorate-General for the Environment (European Commission)             |
| DOE     | Department of Energy (US)   |
| dwt     | deadweight tonnage  |
| ECA     | emission control area   |
| EEDI    | Energy Efficiency Design Index  |
| EEZ     | Exclusive Economic Zone   |
| EF      | emission factor   |
| EIA     | Environmental Investigation Agency  |
| EPA     | (US) Environmental Protection Agency                                      |
| FCF     | fuel correction factors   |
| FPSO    | floating production storage and offloading                                |
| GDP     | gross domestic product  |
| GHG     | greenhouse gas  |
| gt      | gross tonnage   |
| GWP     | global warming potential (GWP <sub>100</sub> represents the 100-year GWP) |
| HCFC    | hydrochlorofluorocarbon   |
| HFC     | hydrofluorocarbon   |
| HFO     | heavy fuel oil  |
| HSD     | high speed diesel (engine)  |
| IAM     | integrated assessment models  |
| IEA     | International Energy Agency   |
| IFO     | intermediate fuel oil   |
| IHSF    | IHS Fairplay  |
| IMarEST | Institute of Marine Engineering, Science and Technology                   |
| IMO     | International Maritime Organization                                       |
| IPCC    | Intergovernmental Panel on Climate Change                                 |
| LNG     | liquid natural gas  |
| LRIT    | long-range identification and tracking (of ships)                         |
| MACCs   | marginal abatement cost curves  |
| MCR     | maximum continuous revolution   |
| MDO     | marine diesel oil   |
| MEPC    | Marine Environment Protection Committee (IMO)                             |
| MGO     | marine gas oil  |
| MMSI    | Maritime Mobile Service Identity  |
| MSD     | medium speed diesel (engine)  |
| nmi     | nautical mile   |
| NMVOC   | non-methane volatile organic compounds                                    |
| PCF     | perfluorocarbon   |
| PM      | particulate matter  |
| QA      | quality assurance   |
| QC      | quality control   |
| RCP     | representative concentration pathways                                     |
| S-AIS   | Satellite-based Automatic Identification System                           |
| SEEMP   | Ship Energy Efficiency Management Plan                                    |
| SFOC    | specific fuel oil consumption   |
| SSD     | slow speed diesel (engine)  |
| SSP     | shared socioeconomic pathway  |
| UNEP    | United Nations Environment Programme                                      |
| UNFCCC  | United Nations Framework Convention on Climate Change                     |
| VOC     | volatile organic compounds  |

## Key definitions

**International shipping:** shipping between ports of different countries, as opposed to domestic shipping. International shipping excludes military and fishing vessels. By this definition, the same ship may frequently be engaged in both international and domestic shipping operations. This is consistent with IPCC 2006 Guidelines (Second IMO GHG Study 2009).

**International marine bunker fuel:** "[...] fuel quantities delivered to ships of all flags that are engaged in international navigation. The international navigation may take place at sea, on inland lakes and waterways, and in coastal waters. Consumption by ships engaged in domestic navigation is excluded. The domestic/international split is determined on the basis of port of departure and port of arrival, and not by the flag or nationality of the ship. Consumption by fishing vessels and by military forces is also excluded and included in residential, services and agriculture" (IEA website: <http://www.iea.org/aboutus/glossary/i>).

**Domestic shipping:** shipping between ports of the same country, as opposed to international shipping. Domestic shipping excludes military and fishing vessels. By this definition, the same ship may frequently be engaged in both international and domestic shipping operations. This definition is consistent with the IPCC 2006 Guidelines (Second IMO GHG Study 2009).

**Domestic navigation fuel:** fuel delivered to vessels of all flags not engaged in international navigation (see the definition for international marine bunker fuel above). The domestic/international split should be determined on the basis of port of departure and port of arrival and not by the flag or nationality of the ship. Note that this may include journeys of considerable length between two ports in the same country (e.g. San Francisco to Honolulu). Fuel used for ocean, coastal and inland fishing and military consumption is excluded (<http://www.iea.org/media/training/presentations/statisticsmarch/StatisticsofNonOECDCountries.pdf>).

**Fishing fuel:** fuel used for inland, coastal and deep-sea fishing. It covers fuel delivered to ships of all flags that have refuelled in the country (including international fishing) as well as energy used in the fishing industry (ISIC Division 03). Before 2007, fishing was included with agriculture/forestry and this may continue to be the case for some countries (<http://www.iea.org/media/training/presentations/statisticsmarch/StatisticsofNonOECDCountries.pdf>).

**Tonne:** a metric system unit of mass equal to 1,000 kilograms (2,204.6 pounds) or 1 megagram (1 Mg). To avoid confusion with the smaller short ton and the slightly larger long ton, the tonne is also known as a metric ton; in this report, the tonne is distinguished by its spelling.

**Ton:** a non-metric unit of mass considered to represent 907 kilograms (2,000 pounds), also sometimes called "short ton". In the United Kingdom the ton is defined as 1016 kilograms (2,240 pounds), also called "long ton". In this report, ton is used to imply "short ton" (907 kg) where the source cited used this term, and in calculations based on these sources (e.g. Section 2.1.3: Refrigerants, halogenated hydrocarbons and other non-combustion emissions).

# Executive Summary

## Key findings from the Third IMO GHG Study 2014

1. Shipping emissions during the period 2007–2012 and their significance relative to other anthropogenic emissions.

1.1. For the year 2012, total shipping emissions were approximately 949 million tonnes CO<sub>2</sub> and 972 million tonnes CO<sub>2</sub>e for GHGs combining CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub>O. International shipping emissions for 2012 are estimated to be 796 million tonnes CO<sub>2</sub> and 816 million tonnes CO<sub>2</sub>e for GHGs combining CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub>O. International shipping accounts for approximately 2.2% and 2.1% of global CO<sub>2</sub> and GHG emissions on a CO<sub>2</sub> equivalent (CO<sub>2</sub>e) basis, respectively. **Table 1** presents the full time series of shipping CO<sub>2</sub> and CO<sub>2</sub>e emissions compared with global total CO<sub>2</sub> and CO<sub>2</sub>e emissions.

For the period 2007–2012, on average, shipping accounted for approximately 3.1% of annual global CO<sub>2</sub> and approximately 2.8% of annual GHGs on a CO<sub>2</sub>e basis using 100-year global warming potential conversions from the AR5. A multi-year average estimate for all shipping using bottom-up totals for 2007–2012 is 1,016 million tonnes CO<sub>2</sub> and 1,038 million tonnes CO<sub>2</sub>e for GHGs combining CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub>O. International shipping accounts for approximately 2.6% and 2.4% of CO<sub>2</sub> and GHGs on a CO<sub>2</sub>e basis, respectively. A multi-year average estimate for international shipping using bottom-up totals for 2007–2012 is 846 million tonnes CO<sub>2</sub> and 866 million tonnes CO<sub>2</sub>e for GHGs combining CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub>O. These multi-year CO<sub>2</sub> and CO<sub>2</sub>e comparisons are similar to, but slightly smaller than, the 3.3% and 2.7% of global CO<sub>2</sub> emissions reported by the Second IMO GHG Study 2009 for total shipping and international shipping in the year 2007, respectively.



Table 1 a) Shipping CO<sub>2</sub> emissions compared with global CO<sub>2</sub> (values in million tonnes CO<sub>2</sub>); and  
b) Shipping GHGs (in CO<sub>2</sub>e) compared with global GHGs (values in million tonnes CO<sub>2</sub>e).

| Year           | Global CO <sub>2</sub> <sup>1</sup> | Third IMO GHG Study 2014 CO <sub>2</sub> |             |                        |             |
|----------------|-------------------------------------|--|-------------|------------------------|-------------|
|                |                                     | Total shipping                           | % of global | International shipping | % of global |
| 2007           | 31,409                              | 1,100                                    | 3.5%        | 885                    | 2.8%        |
| 2008           | 32,204                              | 1,135                                    | 3.5%        | 921                    | 2.9%        |
| 2009           | 32,047                              | 978                                      | 3.1%        | 855                    | 2.7%        |
| 2010           | 33,612                              | 915                                      | 2.7%        | 771                    | 2.3%        |
| 2011           | 34,723                              | 1,022                                    | 2.9%        | 850                    | 2.4%        |
| 2012           | 35,640                              | 949                                      | 2.7%        | 796                    | 2.2%        |
| <b>Average</b> | <b>33,273</b>                       | <b>1,016</b>                             | <b>3.1%</b> | <b>846</b>             | <b>2.6%</b> |

| Year           | Global CO <sub>2</sub> e <sup>2</sup> | Third IMO GHG Study 2014 CO <sub>2</sub> e |             |                        |             |
|----------------|---------------------------------------|--|-------------|------------------------|-------------|
|                |                                       | Total shipping                             | % of global | International shipping | % of global |
| 2007           | 34,881                                | 1,121                                      | 3.2%        | 903                    | 2.6%        |
| 2008           | 35,677                                | 1,157                                      | 3.2%        | 940                    | 2.6%        |
| 2009           | 35,519                                | 998  | 2.8%        | 873                    | 2.5%        |
| 2010           | 37,085                                | 935  | 2.5%        | 790                    | 2.1%        |
| 2011           | 38,196                                | 1,045                                      | 2.7%        | 871                    | 2.3%        |
| 2012           | 39,113                                | 972  | 2.5%        | 816                    | 2.1%        |
| <b>Average</b> | <b>36,745</b>                         | <b>1,038</b>                               | <b>2.8%</b> | <b>866</b>             | <b>2.4%</b> |

- 1.2. This study estimates multi-year (2007–2012) average annual totals of 20.9 million and 11.3 million tonnes for NO<sub>x</sub> (as NO<sub>2</sub>) and SO<sub>x</sub> (as SO<sub>2</sub>) from all shipping, respectively (corresponding to 6.3 million and 5.6 million tonnes converted to elemental weights for nitrogen and sulphur, respectively). NO<sub>x</sub> and SO<sub>x</sub> play indirect roles in tropospheric ozone formation and indirect aerosol warming at regional scales. International shipping is estimated to produce approximately 18.6 million and 10.6 million tonnes of NO<sub>x</sub> (as NO<sub>2</sub>) and SO<sub>x</sub> (as SO<sub>2</sub>) annually; this converts to totals of 5.6 million and 5.3 million tonnes of NO<sub>x</sub> and SO<sub>x</sub> (as elemental nitrogen and sulphur, respectively). Global NO<sub>x</sub> and SO<sub>x</sub> emissions from all shipping represent about 15% and 13% of global NO<sub>x</sub> and SO<sub>x</sub> from anthropogenic sources reported in the latest IPCC Assessment Report (AR5), respectively; international shipping NO<sub>x</sub> and SO<sub>x</sub> represent approximately 13% and 12% of global NO<sub>x</sub> and SO<sub>x</sub> totals, respectively.
- 1.3. Over the period 2007–2012, average annual fuel consumption ranged between approximately 250 million and 325 million tonnes of fuel consumed by all ships within this study, reflecting top-down and bottom-up methods, respectively. Of that total, international shipping fuel consumption ranged between approximately 200 million and 270 million tonnes per year, depending on whether consumption was defined as fuel allocated to international voyages (top-down) or fuel used by ships engaged in international shipping (bottom-up), respectively.
- 1.4. Correlated with fuel consumption, CO<sub>2</sub> emissions from shipping are estimated to range between approximately 740 million and 795 million tonnes

<sup>1</sup> Global comparator represents CO<sub>2</sub> from fossil fuel consumption and cement production, converted from Tg C y<sup>-1</sup> to million metric tonnes CO<sub>2</sub>. Sources: Boden et al. 2013 for years 2007–2010; Peters et al. 2013 for years 2011–2012, as referenced in IPCC (2013).

<sup>2</sup> Global comparator represents N<sub>2</sub>O from fossil fuels consumption and cement production. Source: IPCC (2013, Table 6.9).

per year in top-down results, and to range between approximately 900 million and 1150 million tonnes per year in bottom-up results. Both the top-down and the bottom-up methods indicate limited growth in energy and CO<sub>2</sub> emissions from ships during 2007–2012, as suggested both by the IEA data and the bottom-up model. Nitrous oxide (N<sub>2</sub>O) emission patterns over 2007–2012 are similar to the fuel consumption and CO<sub>2</sub> patterns, while methane (CH<sub>4</sub>) emissions from ships increased due to increased activity associated with the transport of gaseous cargoes by liquefied gas tankers, particularly during 2009–2012.

- 1.5. International shipping CO<sub>2</sub> estimates range between approximately 595 million and 650 million tonnes calculated from top-down fuel statistics, and between approximately 775 million and 950 million tonnes according to bottom-up results. International shipping is the dominant source of the total shipping emissions of other GHGs: nitrous oxide (N<sub>2</sub>O) emissions from international shipping account for the majority (approximately 85%) of total shipping N<sub>2</sub>O emissions, and methane (CH<sub>4</sub>) emissions from international ships account for nearly all (approximately 99%) of total shipping emissions of CH<sub>4</sub>.
  - 1.6. Refrigerant and air conditioning gas releases account for the majority of HFC (and HCFC) emissions from ships. For older vessels, HCFCs (R-22) are still in service, whereas new vessels use HCFs (R134a/R404a). Use of SF<sub>6</sub> and PCFs in ships is documented as rarely used in large enough quantities to be significant and is not estimated in this report.
  - 1.7. Refrigerant and air conditioning gas releases from shipping contribute an additional 15 million tons (range 10.8 million–19.1 million tons) in CO<sub>2</sub> equivalent emissions. Inclusion of reefer container refrigerant emissions yields 13.5 million tons (low) and 21.8 million tons (high) of CO<sub>2</sub> emissions.
  - 1.8. Combustion emissions of SO<sub>x</sub>, NO<sub>x</sub>, PM, CO and NMVOCs are also correlated with fuel consumption patterns, with some variability according to properties of combustion across engine types, fuel properties, etc., which affect emissions substances differently.
2. Resolution, quality and uncertainty of the emissions inventories.
- 2.1. The bottom-up method used in this study applies a similar approach to the Second IMO GHG Study 2009 in order to estimate emissions from activity. However, instead of analysis carried out using ship type, size and annual average activity, calculations of activity, fuel consumption (per engine) and emissions (per GHG and pollutant substances) are performed for each in-service ship during each hour of each of the years 2007–2012, before aggregation to find the totals of each fleet and then of total shipping (international, domestic and fishing) and international shipping. This removes any uncertainty attributable to the use of average values and represents a substantial improvement in the resolution of shipping activity, energy demand and emissions data.

- 2.2. This study clearly demonstrates the confidence that can be placed in the detailed findings of the bottom-up method of analysis through both quality analysis and uncertainty analysis. Quality analysis includes rigorous testing of bottom-up results against noon reports and LRIT data. Uncertainty analysis quantifies, for the first time, the uncertainties in the top-down and the bottom-up estimates.
  - 2.3. These analyses show that high-quality inventories of shipping emissions can be produced through the analysis of AIS data using models. Furthermore, the advancement in the state-of-the-art methods used in this study provides insight and produces new knowledge and understanding of the drivers of emissions within sub-sectors of shipping (ships of common type and size).
  - 2.4. The quality analysis shows that the availability of improved data (particularly AIS data) since 2010 has enabled the uncertainty of inventory estimates to be reduced (relative to previous years' estimates). However, uncertainties remain, particularly in the estimation of the total number of active ships and the allocation of ships or ship voyages between domestic and international shipping.
  - 2.5. For both the top-down and the bottom-up inventory estimates in this study, the uncertainties relative to the best estimate are not symmetrical (the likelihood of an overestimate is not the same as that of an underestimate). The top-down estimate is most likely to be an underestimate (for both total shipping and international shipping), for reasons discussed in the main report. The bottom-up uncertainty analysis shows that while the best estimate is higher than top-down totals, uncertainty is more likely to lower estimated values from the best estimate (again, for both total shipping and international shipping).
  - 2.6. There is an overlap between the estimated uncertainty ranges of the bottom-up and the top-down estimates of fuel consumption in each year and for both total shipping and international shipping. This provides evidence that the discrepancy between the top-down and the bottom-up best estimate value is resolvable through the respective methods' uncertainties.
  - 2.7. Estimates of CO<sub>2</sub> emissions from the top-down and bottom-up methods converge over the period of the study as the source data of both methods improve in quality. This provides increased confidence in the quality of the methodologies and indicates the importance of improved AIS coverage from the increased use of satellite and shore-based receivers to the accuracy of the bottom-up method.
  - 2.8. All previous IMO GHG studies have preferred activity-based (bottom-up) inventories. In accordance with IPCC guidance, the statements from the MEPC Expert Workshop and the Second IMO GHG Study 2009, the Third IMO GHG Study 2014 consortium specifies the bottom-up best estimate as the consensus estimate for all years' emissions for GHGs and all pollutants.
3. Comparison of the inventories calculated in this study with the inventories of the Second 2009 IMO GHG study.
    - 3.1. Best estimates for 2007 fuel use and CO<sub>2</sub> emissions in this study agree with the "consensus estimates" of the Second IMO GHG Study 2009 as they are within approximately 5% and approximately 4%, respectively.

- 3.2. Differences with the Second IMO GHG Study 2009 can be attributed to improved activity data, better precision of individual vessel estimation and aggregation and updated knowledge of technology, emissions rates and vessel conditions. Quantification of uncertainties enables a fuller comparison of this study with previous work and future studies.
  - 3.3. The estimates in this study of non-CO<sub>2</sub> GHGs and some air pollutant substances differ substantially from the 2009 results for the common year 2007. This study produces higher estimates of CH<sub>4</sub> and N<sub>2</sub>O than the earlier study, higher by 43% and 40%, respectively (approximate values). The new study estimates lower emissions of SO<sub>x</sub> (approximately 30% lower) and approximately 40% of the CO emissions estimated in the 2009 study.
  - 3.4. Estimates for NO<sub>x</sub>, PM and NMVOC in both studies are similar for 2007, within 10%, 11% and 3%, respectively (approximate values).
4. Fuel use trends and drivers in fuel use (2007–2012), in specific ship types.
    - 4.1. The total fuel consumption of shipping is dominated by three ship types: oil tankers, containerships and bulk carriers. Consistently for all ship types, the main engines (propulsion) are the dominant fuel consumers.
    - 4.2. Allocating top-down fuel consumption to international shipping can be done explicitly, according to definitions for international marine bunkers. Allocating bottom-up fuel consumption to international shipping required application of a heuristic approach. The Third IMO GHG Study 2014 used qualitative information from AIS to designate larger passenger ferries (both passenger-only Pax ferries and vehicle-and-passenger RoPax ferries) as international cargo transport vessels. Both methods are unable to fully evaluate global domestic fuel consumption.
    - 4.3. The three most significant sectors of the shipping industry from a CO<sub>2</sub> perspective (oil tankers, containerships and bulk carriers) have experienced different trends over the period of this study (2007–2012). All three contain latent emissions increases (suppressed by slow steaming and historically low activity and productivity) that could return to activity levels that create emissions increases if the market dynamics that informed those trends revert to their previous levels.
    - 4.4. Fleet activity during the period 2007–2012 demonstrates widespread adoption of slow steaming. The average reduction in at-sea speed relative to design speed was 12% and the average reduction in daily fuel consumption was 27%. Many ship type and size categories exceeded this average. Reductions in daily fuel consumption in some oil tanker size categories was approximately 50% and some container ship size categories reduced energy use by more than 70%. Generally, smaller ship size categories operated without significant change over the period, also evidenced by more consistent fuel consumption and voyage speeds.
    - 4.5. A reduction in speed and the associated reduction in fuel consumption do not relate to an equivalent percentage increase in efficiency, because a greater number of ships (or more days at sea) are required to do the same amount of transport work.
  5. Future scenarios (2012–2050).
    - 5.1. Maritime CO<sub>2</sub> emissions are projected to increase significantly in the coming decades. Depending on future economic and energy developments, this study's BAU scenarios project an increase by 50% to 250% in the period to

2050. Further action on efficiency and emissions can mitigate the emissions growth, although all scenarios but one project emissions in 2050 to be higher than in 2012.

- 5.2. Among the different cargo categories, demand for transport of unitized cargoes is projected to increase most rapidly in all scenarios.
- 5.3. Emissions projections demonstrate that improvements in efficiency are important in mitigating emissions increase. However, even modelled improvements with the greatest energy savings could not yield a downward trend. Compared to regulatory or market-driven improvements in efficiency, changes in the fuel mix have a limited impact on GHG emissions, assuming that fossil fuels remain dominant.
- 5.4. Most other emissions increase in parallel with CO<sub>2</sub> and fuel, with some notable exceptions. Methane emissions are projected to increase rapidly (albeit from a low base) as the share of LNG in the fuel mix increases. Emissions of nitrogen oxides increase at a lower rate than CO<sub>2</sub> emissions as a result of Tier II and Tier III engines entering the fleet. Emissions of particulate matter show an absolute decrease until 2020, and sulphurous oxides continue to decline through 2050, mainly because of MARPOL Annex VI requirements on the sulphur content of fuels.

## Aim and objective of the study

This study provides IMO with a multi-year inventory and future scenarios for GHG and non-GHG emissions from ships. The context for this work is:

- The IMO committees and their members require access to up-to-date information to support working groups and policy decision-making. Five years have passed since the publication of the previous study (Second IMO GHG Study 2009), which estimated emissions for 2007 and provided scenarios from 2007 to 2050. Furthermore, the IPCC has updated its analysis of future scenarios for the global economy in its AR5 (2013), including mitigation scenarios. IMO policy developments, including MARPOL Annex VI amendments for EEDI and SEEMP, have also occurred since the 2009 study was undertaken. In this context, the Third IMO GHG Study 2014 updates the previous work by producing yearly inventories since 2007.
- Other studies published since the Second IMO GHG Study 2009 have indicated that one impact of the global financial crisis may have been to modify previously reported trends, both in demand for shipping and in the intensity of shipping emissions. This could produce significantly different recent-year emissions than the previously forecasted scenarios, and may modify the long-run projections for 2050 ship emissions. In this context, the Third IMO GHG Study 2014 provides new projections informed by important economic and technological changes since 2007.
- Since 2009, greater geographical coverage achieved via satellite technology/AIS receivers has improved the quality of data available to characterize shipping activity beyond the state of practice used in the Second IMO GHG Study 2009. These new data make possible more detailed methods that can substantially improve the quality of bottom-up inventory estimates. Additionally, improved understanding of marine fuel (bunker) statistics reported by nations has identified, but not quantified, potential uncertainties in the accuracy of top-down inventory estimates from fuel sales to ships. Improved bottom-up estimates can reconcile

better the discrepancies between top-down and bottom-up emissions observed in previous studies (including the Second IMO GHG Study 2009). In this context, the Third IMO GHG Study 2014 represents the most detailed and comprehensive global inventory of shipping emissions to date.

The scope and design of the Third IMO GHG Study 2014 responds directly to specific directives from the IMO Secretariat that derived from the IMO Expert Workshop (2013) recommendations with regard to activity-based (bottom-up) ship emissions estimation. These recommendations were:

- to consider direct vessel observations to the greatest extent possible;
- to use vessel-specific activity and technical details in a bottom-up inventory model;
- to use "to the best extent possible" actual vessel speed to obtain engine loads.

The IMO Expert Workshop recognised that "bottom-up estimates are far more detailed and are generally based on ship activity levels by calculating the fuel consumption and emissions from individual ship movements" and that "a more sophisticated bottom-up approach to develop emission estimates on a ship-by-ship basis" would "require significant data to be inputted and may require additional time [...] to complete".

## Structure of the study and scope of work

The Third IMO GHG Study 2014 report follows the structure of the terms of reference for the work, which comprise three main sections:

### **Section 1: Inventories of CO<sub>2</sub> emissions from international shipping 2007–2012**

This section deploys both a top-down (2007–2011) and a bottom-up (2007–2012) analysis of CO<sub>2</sub> emissions from international shipping. The inventories are analysed and discussed with respect to the quality of methods and data and to uncertainty of results. The discrepancies between the bottom-up and top-down inventories are discussed. The Third IMO GHG Study 2014 inventory for 2007 is compared to the Second IMO GHG Study 2009 inventory for the same year.

### **Section 2: Inventories of emissions of GHGs and other relevant substances from international shipping 2007–2012**

This section applies the top-down (2007–2011) and bottom-up (2007–2012) analysis from Section 1 in combination with data describing the emissions factors and calculations inventories for non-CO<sub>2</sub> GHGs – methane (CH<sub>4</sub>), nitrous oxide (N<sub>2</sub>O), HFCs and sulphur hexafluoride (SF<sub>6</sub>) – and relevant substances – oxides of sulphur (SO<sub>x</sub>), oxides of nitrogen (NO<sub>x</sub>), particulate matter (PM), carbon monoxide (CO) and NMVOCs. The quality of methods and data and uncertainty of the inventory results are discussed, and comparisons are made between the top-down and bottom-up estimates in the Third IMO GHG Study 2014 and the results of the Second IMO GHG Study 2009.


### **Section 3: Scenarios for shipping emissions 2012–2050**

This section develops scenarios for future emissions for all GHGs and other relevant substances investigated in Sections 1 and 2. Results reflect the incorporation of new base scenarios used in GHG projections for non-shipping sectors and method advances, and incorporate fleet activity and emissions insights emerging from the 2007–2012 estimates. Drivers of emissions trajectories are evaluated and sources of uncertainty in the scenarios are discussed.

## Summary of Section 1: Inventories of CO<sub>2</sub> from international shipping

### 2012 fuel consumption and CO<sub>2</sub> emissions by ship type

**Figure 1** presents the CO<sub>2</sub> emissions by ship type for 2012, calculated using the bottom-up method. Equivalent ship type-specific results cannot be presented for the top-down method because the reported marine fuel sales statistics are only available in three categories: international, domestic and fishing.

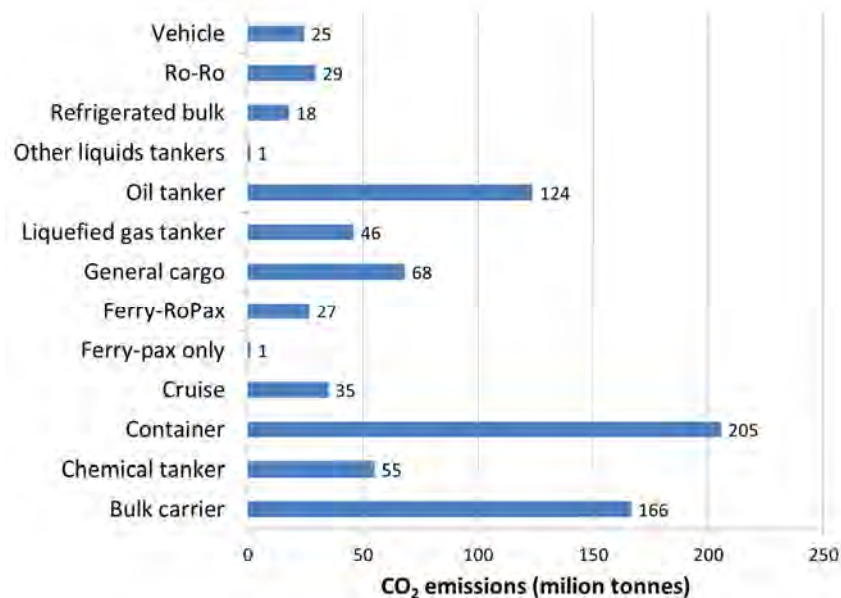

**Figure 1: Bottom-up CO<sub>2</sub> emissions from international shipping by ship type 2012.**

**Figure 2** shows the relative fuel consumption among vessel types in 2012 (both international and domestic shipping), estimated using the bottom-up method. The figure also identifies the relative fuel consumption of the main engine (predominantly for propulsion purposes), auxiliary engine (normally for electricity generation) and the boilers (for steam generation). The total shipping fuel consumption is shown in 2012 to be dominated by three ship types: oil tankers, bulk carriers and containerships. In each of those ship types, the main engine consumes the majority of the fuel.

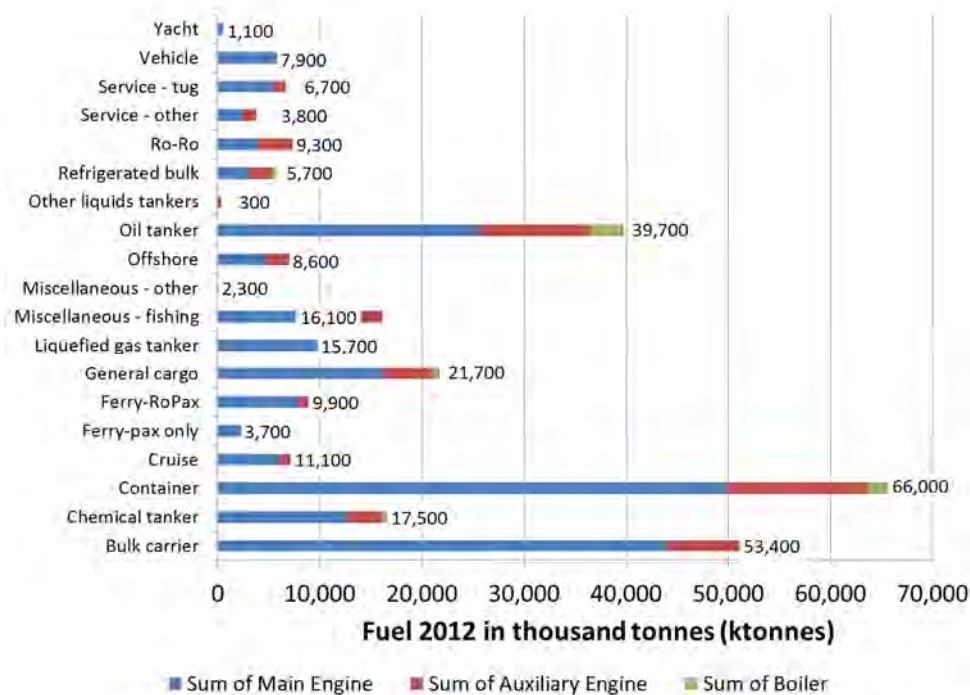


Figure 2: Summary graph of annual fuel consumption broken down by ship type and machinery component (main, auxiliary and boiler) 2012.

### 2007–2012 fuel consumption by bottom-up and top-down methods: Third IMO GHG Study 2014 and Second IMO GHG Study 2009

Figure 3 shows the year-on-year trends for the total CO<sub>2</sub> emissions of each ship type, as estimated using the bottom-up method. Figure 4 and Figure 5 show the associated total fuel consumption estimates for all years of the study, from both the top-down and bottom-up methods. The total CO<sub>2</sub> emissions aggregated to the lowest level of detail in the top-down analysis (international, domestic and fishing) are presented in Table 2 and Table 3.

Figure 4 and Figure 3 present results from the 2014 study (all years) and from the Second IMO GHG Study 2009 (2007 only). The comparison of the estimates in 2007 shows that using both the top-down and the bottom-up analysis methods, the results of the Third IMO GHG Study 2014 for the total fuel inventory and the international shipping estimate are in close agreement with the findings from the Second IMO GHG Study 2009. Further analysis and discussion of the comparison between the two studies is undertaken in Section 1.6 of this report.



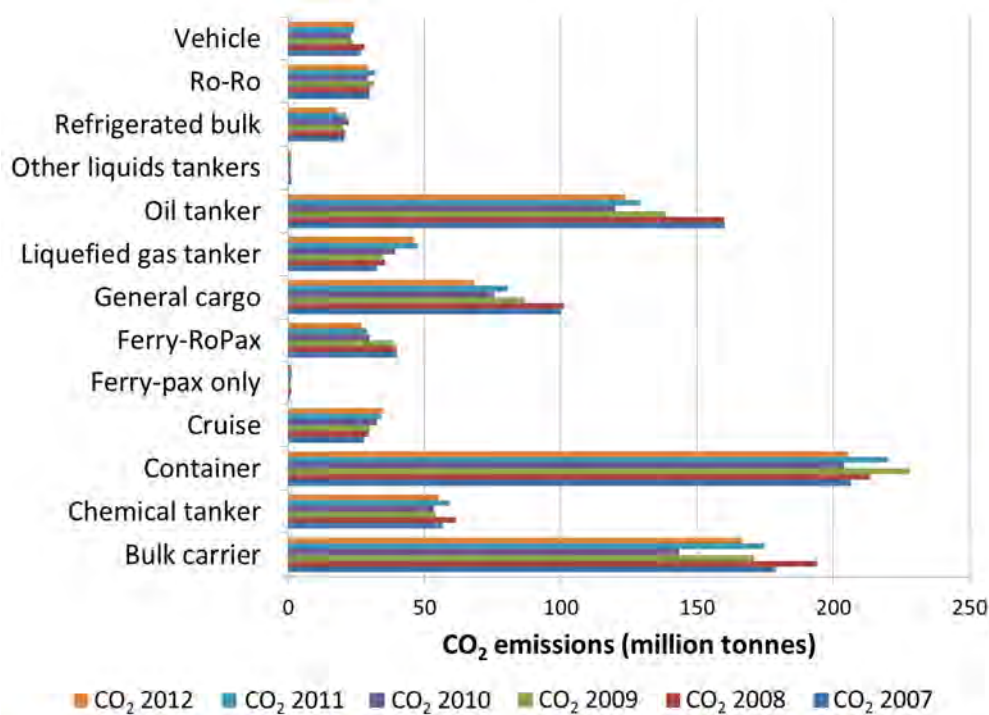


Figure 3: CO<sub>2</sub> emissions by ship type (international shipping only) calculated using the bottom-up method for all years (2007–2012).

The vertical bar attached to the total fuel consumption estimate for each year and each method represents the uncertainty in the estimates. For the bottom-up method, this error bar is derived from a Monte Carlo simulation of the most important input parameters to the calculation. The most important sources of uncertainty in the bottom-up method results are the number of days a ship spends at sea per year (attributable to incomplete AIS coverage of a ship's activity) and the number of ships that are active (in-service) in a given year (attributable to the discrepancy between the difference between the number of ships observed in the AIS data and the number of ships described as in-service in the IHSF database). The top-down estimates are also uncertain, including observed discrepancies between global imports and exports of fuel oil and distillate oil, observed transfer discrepancies among fuel products that can be blended into marine fuels, and potential for misallocation of fuels between sectors of shipping (international, domestic and fishing). Neither the top-down nor the bottom-up uncertainties are symmetric, showing that uncertainty in the top-down best estimate is more likely to increase the estimate of fuel consumption from the best estimate, and that uncertainty in bottom-up best-estimate value is more likely to lower estimated values from the best estimate.

Differences between the bottom-up and the top-down best-estimate values in this study are consistent with the differences observed in the Second IMO GHG Study 2009. This convergence of best estimates is important because, in conjunction with the quality (Section 1.4) and uncertainty (Section 1.5) analysis, it provides evidence that increasing confidence can be placed in both analytical approaches.

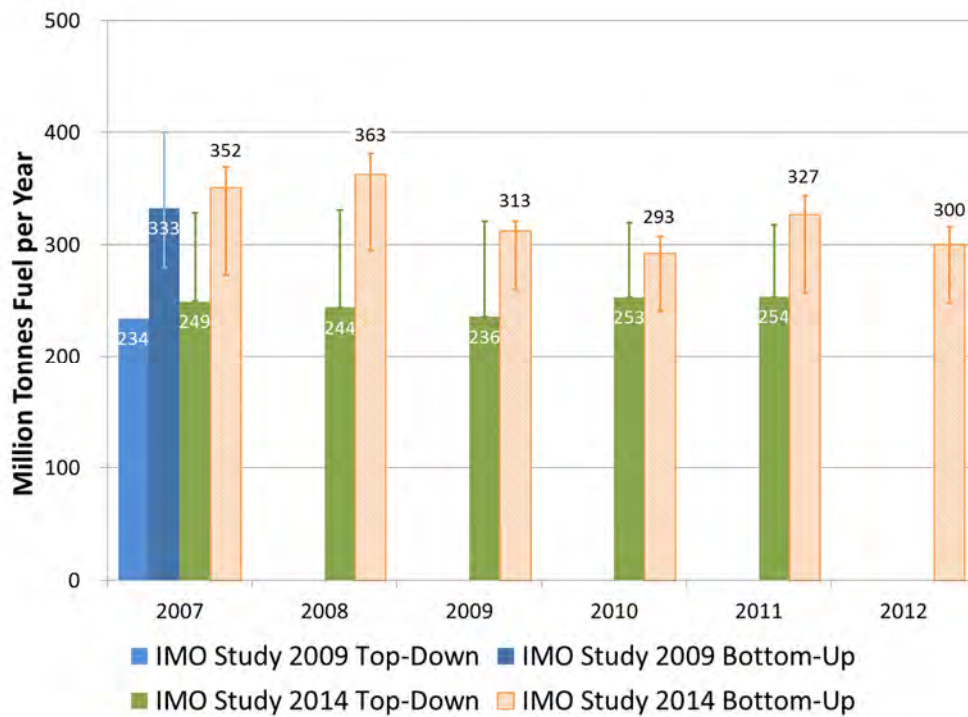


Figure 4: Summary graph of annual fuel use by all ships, estimated using the top-down and bottom-up methods, showing Second IMO GHG Study 2009 estimates and uncertainty ranges.

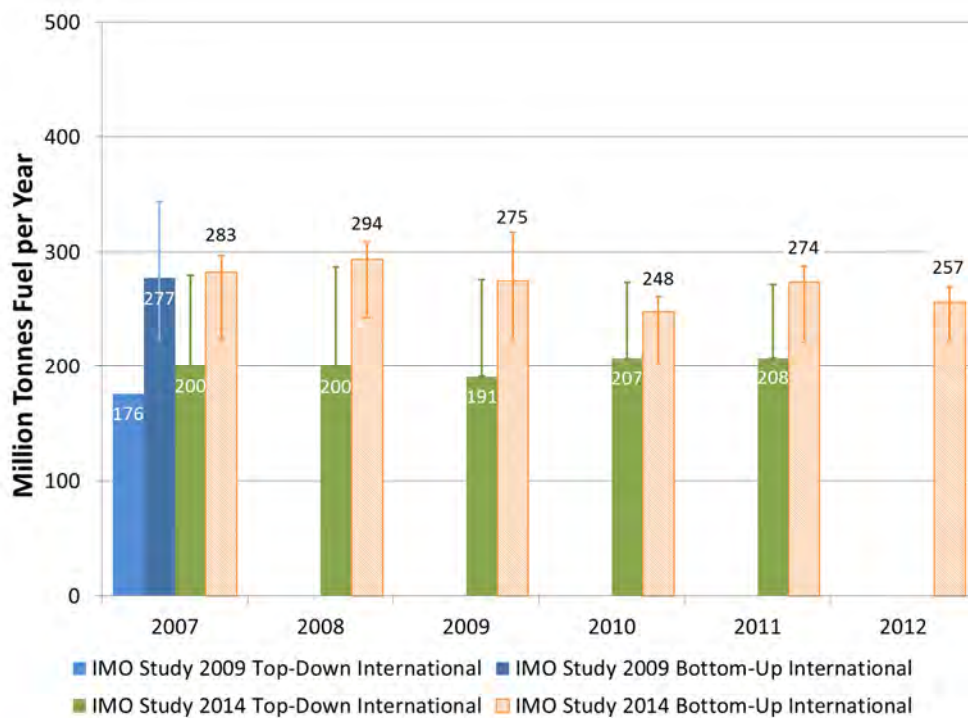


Figure 5: Summary graph of annual fuel use by international shipping, estimated using the top-down and bottom-up methods, showing Second IMO GHG Study 2009 estimates and uncertainty ranges.

**Table 2: International, domestic and fishing CO<sub>2</sub> emissions 2007–2011, using top-down method.**

| Marine sector                | Fuel type | 2007  | 2008  | 2009  | 2010  | 2011  |
|------------------------------|-----------|-------|-------|-------|-------|-------|
| International shipping       | HFO       | 542.1 | 551.2 | 516.6 | 557.1 | 554.0 |
|                              | MDO       | 83.4  | 72.8  | 79.8  | 90.4  | 94.9  |
|                              | NG        | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| Top-down international total | All       | 625.5 | 624.0 | 596.4 | 647.5 | 648.9 |
| Domestic navigation          | HFO       | 62.0  | 44.2  | 47.6  | 44.5  | 39.5  |
|                              | MDO       | 72.8  | 76.6  | 75.7  | 82.4  | 87.8  |
|                              | NG        | 0.1   | 0.1   | 0.1   | 0.1   | 0.2   |
| Top-down domestic total      | All       | 134.9 | 121.0 | 123.4 | 127.1 | 127.6 |
| Fishing                      | HFO       | 3.4   | 3.4   | 3.1   | 2.5   | 2.5   |
|                              | MDO       | 17.3  | 15.7  | 16.0  | 16.7  | 16.4  |
|                              | NG        | 0.1   | 0.1   | 0.1   | 0.1   | 0.1   |
| Top-down fishing total       | All       | 20.8  | 19.2  | 19.3  | 19.2  | 19.0  |
| <b>All fuels top-down</b>    |           | 781.2 | 764.1 | 739.1 | 793.8 | 795.4 |

**Table 3: International, domestic and fishing CO<sub>2</sub> emissions 2007–2012, using bottom-up method.**

| Marine sector                 | Fuel type | 2007    | 2008    | 2009  | 2010  | 2011    | 2012  |
|-------------------------------|-----------|---------|---------|-------|-------|---------|-------|
| International shipping        | HFO       | 773.8   | 802.7   | 736.6 | 650.6 | 716.9   | 667.9 |
|                               | MDO       | 97.2    | 102.9   | 104.2 | 102.2 | 109.8   | 105.2 |
|                               | NG        | 13.9    | 15.4    | 14.2  | 18.6  | 22.8    | 22.6  |
| Bottom-up international total | All       | 884.9   | 920.9   | 855.1 | 771.4 | 849.5   | 795.7 |
| Domestic navigation           | HFO       | 53.8    | 57.4    | 32.5  | 45.1  | 61.7    | 39.9  |
|                               | MDO       | 142.7   | 138.8   | 80.1  | 88.2  | 98.1    | 91.6  |
|                               | NG        | 0       | 0       | 0     | 0     | 0       | 0     |
| Bottom-up domestic total      | All       | 196.5   | 196.2   | 112.6 | 133.3 | 159.7   | 131.4 |
| Fishing                       | HFO       | 1.6     | 1.5     | 0.9   | 0.8   | 1.4     | 1.1   |
|                               | MDO       | 17.0    | 16.4    | 9.3   | 9.2   | 10.9    | 9.9   |
|                               | NG        | 0       | 0       | 0     | 0     | 0       | 11    |
| Bottom-up fishing total       | All       | 18.6    | 18.0    | 10.2  | 10.0  | 12.3    | 22.0  |
| <b>All fuels bottom-up</b>    |           | 1,100.1 | 1,135.1 | 977.9 | 914.7 | 1,021.6 | 949.1 |

The fuel split between residual (HFO) and distillate (MDO) for the top-down approach is explicit in the fuel sales statistics from the IEA. However, the HFO/MDO allocation for the bottom-up inventory could not be finalized without considering the top-down sales insights. This is because the engine-specific data available through IHSF are too sparse, incomplete or ambiguous with respect to fuel type for large numbers of main engines and nearly all auxiliary engines on vessels. QA/QC analysis with regard to fuel type assignment in the bottom-up model was performed using top-down statistics as a guide, along with fuel allocation information from the Second IMO GHG Study 2009. This iteration was important in order to finalize the QA/QC on fuel-determined pollutant emissions (primarily SO<sub>x</sub>) and resulted in slight QA/QC adjustments for other emissions.

In addition to the uncertainties behind the total shipping emissions and fuel type allocations in each year, both methods contain separate but important uncertainty about the allocation of fuel consumption and emissions to international and domestic shipping. Where international shipping is defined as shipping between ports of different countries, and one tank of fuel is used for multiple voyages, there is an intrinsic shortcoming in the top-down method. More specifically, fuel can be sold to a ship engaged in both domestic and international voyages but only one identifier (international or domestic) can be assigned to the report of fuel sold. Using the bottom-up method, while location information is available, the AIS coverage is not consistently high enough to be able to resolve voyage-by-voyage detail. Section 1.2 discusses possible alternative approaches to the classification of international and domestic fuel consumption using the bottom-up method and the selection of definition according to ship type and size category.


Particular care must be taken when interpreting the domestic fuel consumption and emissions estimates from both the top-down and the bottom-up methods. Depending on where the fuel

for domestic shipping and fishing is bought, it may or may not be adequately captured in the IEA marine bunkers. For example, inland or leisure and fishing vessels may purchase fuel at locations where fuel is also sold to other sectors of the economy and therefore it may be misallocated. In the bottom-up method, fuel consumption is only included for ships that appear in the IHSF database (and have an IMO number). While this should cover all international shipping, many domestic vessels (inland, fishing or cabotage) may not be included in this database. An indication of the number of vessels excluded from the bottom-up method was obtained from the count of MMSI numbers observed on the AIS for which no match with the IHSF database was obtained. The implications of this count for both the bottom-up and top-down analyses are discussed in Section 1.4.

**2007–2012 trends in CO<sub>2</sub> emissions and drivers of emissions**

**Figure 6, Figure 7 and Figure 8** present indexed time series of the total CO<sub>2</sub> emissions during the period studied for three ship types: oil tankers, containerships and bulk carriers (all in-service ships). The figures also present several key drivers of CO<sub>2</sub> emissions that can be used to decompose the fleet, activity and CO<sub>2</sub> emission trends, estimated using the bottom-up method. All trends are indexed to their values in 2007. Despite rising transport demand in all three fleets, each fleet's total emissions are shown either to remain approximately constant or to decrease slightly.

The contrast between the three plots in **Figures 6–8** shows that these three sectors of the shipping industry have experienced different changes over the period 2007–2012. The oil tanker sector has reduced its emissions by a total of 20%. During the same period the dry bulk and container ship sectors also saw absolute emissions reductions but by smaller amounts. All ship types experienced similar reductions in average annual fuel consumption but differences in the number of ships in service, which explains the difference in fleet total CO<sub>2</sub> emissions trends. The reduction in average days at sea during the period studied is greatest in the dry bulk fleet, while the container ship fleet has seen a slight increase. Consistent with the results presented in Table 4, containerships adopted slow steaming more than any other ship type. So, over the same period of time, similar reductions in average fuel consumption per ship have come about through different combinations of slow steaming and days at sea.

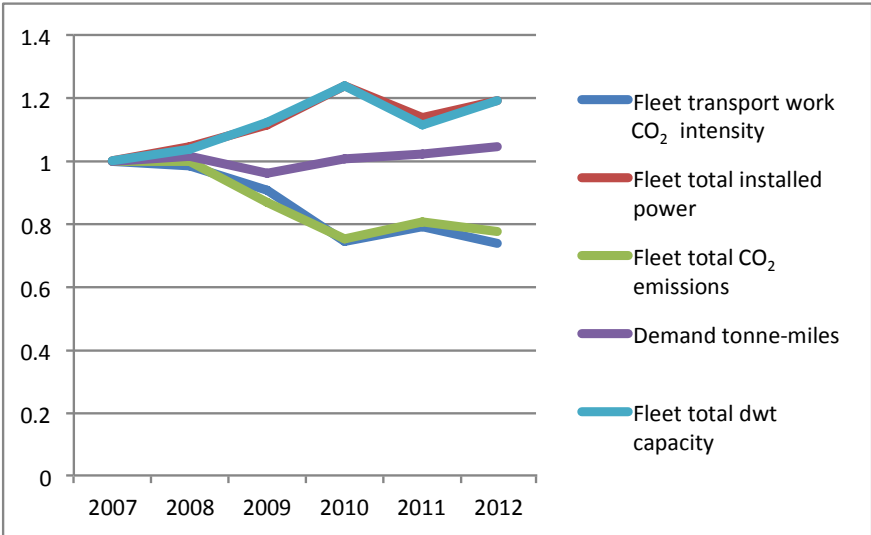

**Figure 6** Time-series for trends in emissions and drivers of emissions in the oil tanker fleet 2007–2012. All trends are indexed to their values in 2007.

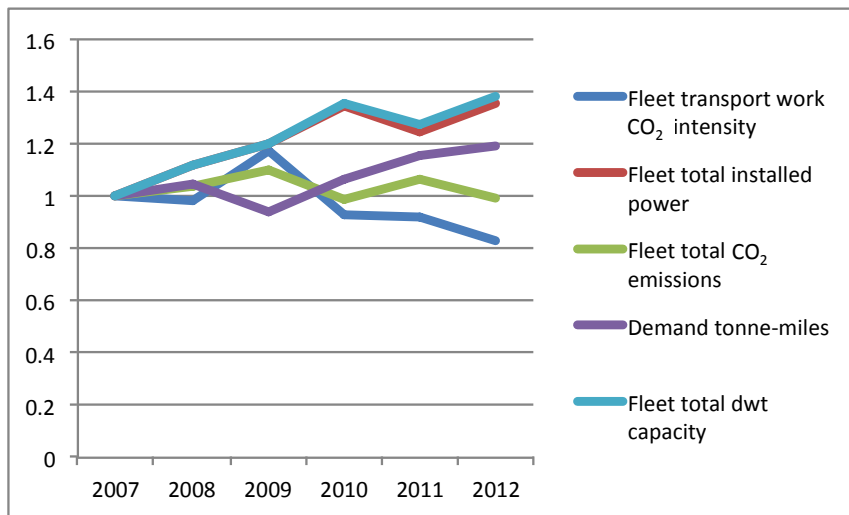


Figure 7: Time-series for trends in emissions and drivers of emissions in the containership fleet 2007-2012. All trends are indexed to their values in 2007.

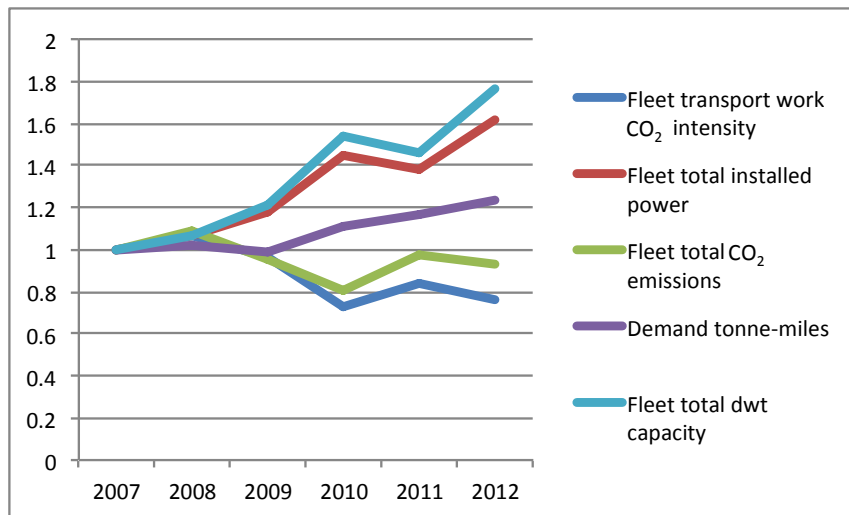


Figure 8: Time series for trends in emissions and drivers of emissions in the bulk carrier fleet 2007–2012. All trends are indexed to their values in 2007.

NOTE: Further data on historic trends and relationship between transport supply and demand can be found in the Second IMO GHG Study 2009.

The bottom-up method constructs the calculations of ship type and size totals from calculations for the fuel consumption of each individual in-service ship in the fleet. The method allows quantification of both the variability within a fleet and the influence of slow steaming. Across all ship types and sizes, the average ratio of operating speed to design speed was 0.85 in 2007 and 0.75 in 2012. In relative terms, ships have slowed down in line with the reported widespread adoption of slow steaming, which began after the financial crisis. The consequence of this observed slow steaming is a reduction in daily fuel consumption of approximately 27%, expressed as an average across all ship types and sizes. However, that average value belies the significant operational changes that have occurred in certain ship type and size categories. Table 4 describes, for three of the ship types studied, the ratio between slow steaming percentage (average at-sea operating speed expressed as a percentage of design speed), the average at-sea main engine load factor (a percentage of the total installed power produced by the main engine) and the average at-sea main engine daily fuel consumption. Many of the larger ship sizes in all three categories are estimated to have experienced reductions in daily fuel consumption in excess of the average value for all shipping of 27%.

Table 4 also shows that the ships with the highest design speeds (containerships) have adopted the greatest levels of slow steaming (in many cases operating at average speeds that are 60–

70% of their design speeds), relative to oil tankers and bulk carriers. Referring back to [Figure 8](#), it can be seen that for bulk carriers, the observed trend in slow steaming is not concurrent with the technical specifications of the ships remaining constant. For example, the largest bulk carriers (200,000+ dwt capacity) saw increases in average size (dwt capacity) as well as increased installed power (from an average of 18.9 MW to 22.2 MW), as a result of a large number of new ships entering the fleet over the period studied. (The fleet grew from 102 ships in 2007 to 294 ships in 2012.)

The analysis of trends in speed and days at sea is consistent with the findings in Section 3 that the global fleet is currently at or near the historic low in terms of productivity (transport work per unit of capacity). The consequence is that these (and many other) sectors of the shipping industry represent latent emissions increases, because the fundamentals (number of ships in service) have seen upward trends that have been offset as economic pressures act to reduce productivity (which in turn reduces emissions intensity). Whether and when the latent emissions may appear is uncertain, as it depends on the future market dynamics of the industry. However, the risk is high that the fleet could encounter conditions favouring the conversion of latent emissions to actual emissions; this could mean that shipping reverts to the trajectory estimated in the Second IMO GHG Study 2009. This upward potential is quantified as part of sensitivity analysis in Section 3.

A reduction in speed and the associated reduction in fuel consumption do not relate to an equivalent percentage increase in efficiency, because a greater number of ships (or more days at sea) are required to do the same amount of transport work. This relationship is discussed in greater detail in Section 3.

Table 4: Relationship between slow steaming, engine load factor (power output) and fuel consumption for 2007 and 2012.

| Ship type    | Size category | Units | 2007  |  |                                      | 2012  |  |                                      | % change in average at-sea tonnes per day (tpd) 2007-2012 |
|--------------|---------------|-------|---|--|--------------------------------------|---|--|--------------------------------------|---|
|              |               |       | Ratio of average at-sea speed to design speed | Average at-sea main engine load factor (% MCR) | At-sea consumption in tonnes per day | Ratio of average at-sea speed to design speed | Average at-sea main engine load factor (% MCR) | At-sea consumption in tonnes per day |   |
| Bulk carrier | 0–9999        | dwt   | 0.92  | 92%  | 7.0                                  | 0.84  | 70%  | 5.5                                  | –24%  |
|              | 10000–34999   |       | 0.86  | 68%  | 22.2                                 | 0.82  | 59%  | 17.6                                 | –23%  |
|              | 35000–59999   |       | 0.88  | 73%  | 29.0                                 | 0.82  | 58%  | 23.4                                 | –21%  |
|              | 60000–99999   |       | 0.90  | 78%  | 37.7                                 | 0.83  | 60%  | 28.8                                 | –27%  |
|              | 100000–199999 |       | 0.89  | 77%  | 55.5                                 | 0.81  | 57%  | 42.3                                 | –27%  |
|              | 200000–+      |       | 0.82  | 66%  | 51.2                                 | 0.84  | 62%  | 56.3                                 | 10%   |
| Container    | 0–999         | TEU   | 0.82  | 62%  | 17.5                                 | 0.77  | 52%  | 14.4                                 | –19%  |
|              | 1000–1999     |       | 0.80  | 58%  | 33.8                                 | 0.73  | 45%  | 26.0                                 | –26%  |
|              | 2000–2999     |       | 0.80  | 58%  | 55.9                                 | 0.70  | 39%  | 38.5                                 | –37%  |
|              | 3000–4999     |       | 0.80  | 59%  | 90.4                                 | 0.68  | 36%  | 58.7                                 | –42%  |
|              | 5000–7999     |       | 0.82  | 63%  | 151.7                                | 0.65  | 32%  | 79.3                                 | –63%  |
|              | 8000–11999    |       | 0.85  | 69%  | 200.0                                | 0.65  | 32%  | 95.6                                 | –71%  |
|              | 12000–14500   |       | 0.84  | 67%  | 231.7                                | 0.66  | 34%  | 107.8                                | –73%  |
|              | 14500–+       |       | –   | –  | –                                    | 0.60  | 28%  | 100.0                                | –   |
| Oil tanker   | 0–4999        | dwt   | 0.89  | 85%  | 5.1                                  | 0.80  | 67%  | 4.3                                  | –18%  |
|              | 5000–9999     |       | 0.83  | 64%  | 9.2                                  | 0.75  | 49%  | 7.1                                  | –26%  |
|              | 10000–19999   |       | 0.81  | 61%  | 15.3                                 | 0.76  | 49%  | 10.8                                 | –34%  |
|              | 20000–59999   |       | 0.87  | 72%  | 28.8                                 | 0.80  | 55%  | 22.2                                 | –26%  |
|              | 60000–79999   |       | 0.91  | 83%  | 45.0                                 | 0.81  | 57%  | 31.4                                 | –35%  |
|              | 80000–119999  |       | 0.91  | 81%  | 49.2                                 | 0.78  | 51%  | 31.5                                 | –44%  |
|              | 120000–199999 |       | 0.92  | 83%  | 65.4                                 | 0.77  | 49%  | 39.4                                 | –50%  |
|              | 200000–+      |       | 0.95  | 90%  | 103.2                                | 0.80  | 54%  | 65.2                                 | –45%  |
|              |               |       |   |  |                                      |   |  |                                      |   |


## Summary of Section 2: Inventories of GHGs and other relevant substances from international shipping

**Figure 10** (international, domestic and fishing) present the time series of the non-CO<sub>2</sub> GHGs and relevant substance emissions over the period of this study (2007–2012). All data are calculated using the bottom-up method and the results of this study are compared with the Second IMO GHG Study 2009 results in **Figure 9**. Calculations performed using the top-down method are presented in Section 2.3.


The trends are generally well correlated with the time-series trend of CO<sub>2</sub> emissions totals, which is in turn well correlated to fuel consumption. A notable exception is the trend in CH<sub>4</sub> emissions, which is dominated by the increase in LNG fuel consumption in the LNG tanker fleet (related to increases in fleet size and activity) during the years 2007–2012.

Agreements with the Second IMO GHG Study 2009 estimates are generally good, although there are some differences, predominantly related to the emissions factors used in the respective studies and how they have been applied. The Second IMO GHG Study 2009 estimated CH<sub>4</sub> emissions from engine combustion to be approximately 100,000 tonnes in the year 2007.




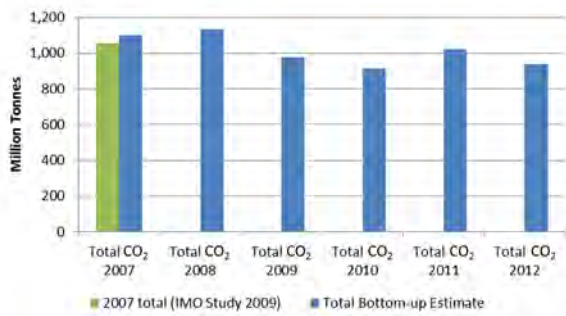


a. CO<sub>2</sub>

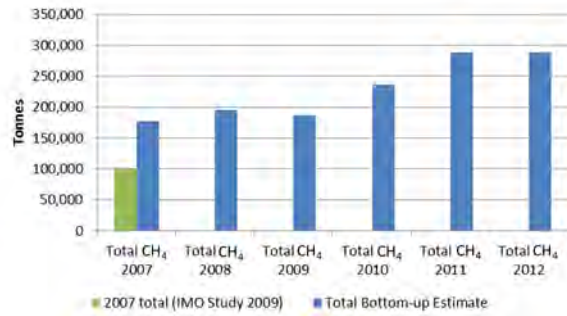


b. CH<sub>4</sub>

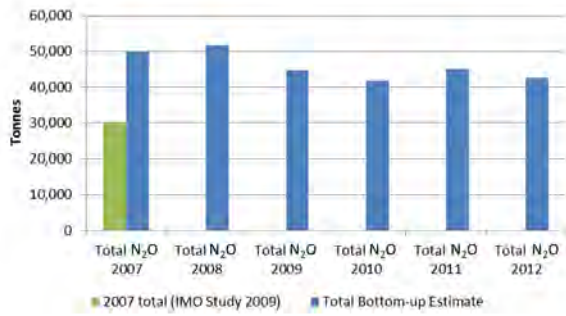


c. N<sub>2</sub>O

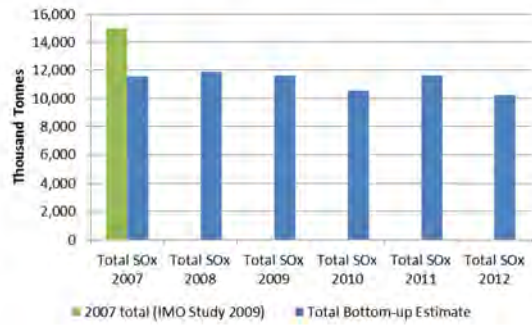


d. SO<sub>x</sub>

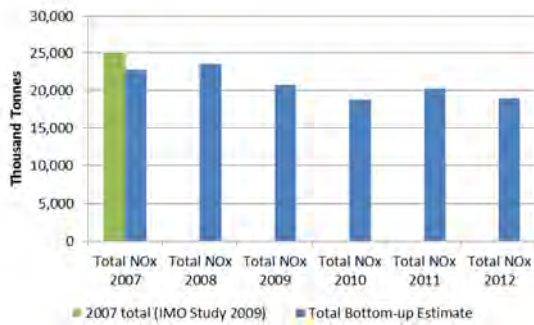


e. NO<sub>x</sub>

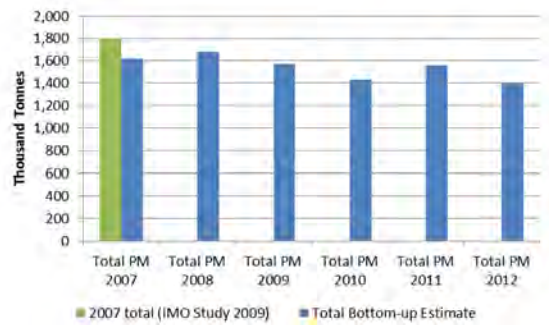

f. PM

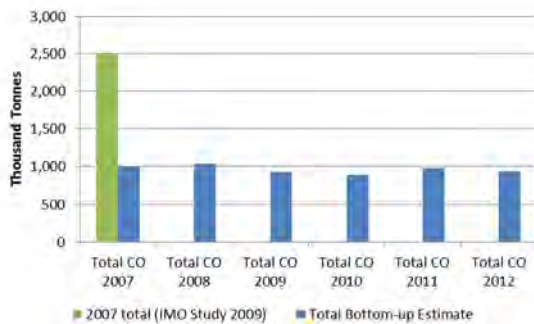


g. CO

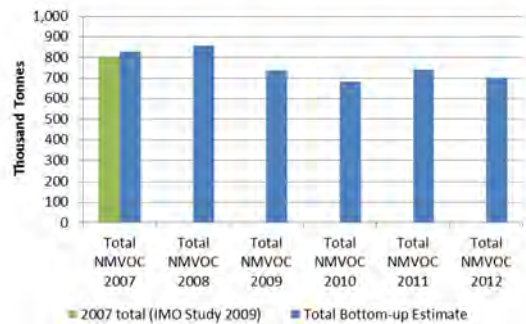


h. NMVOC


Figure 9: Time series of bottom-up results for GHGs and other substances (all shipping). The green bar represents the Second IMO GHG Study 2009 estimate.

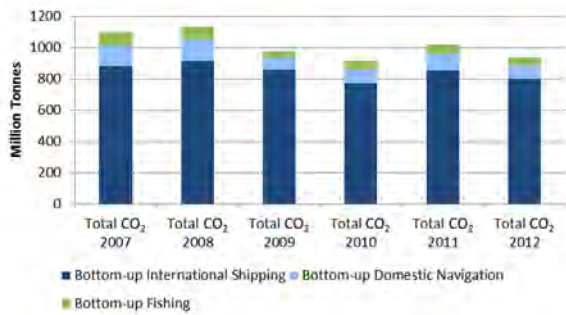


a. CO<sub>2</sub>

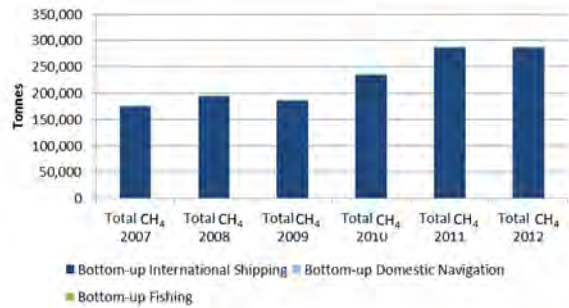


b. CH<sub>4</sub>

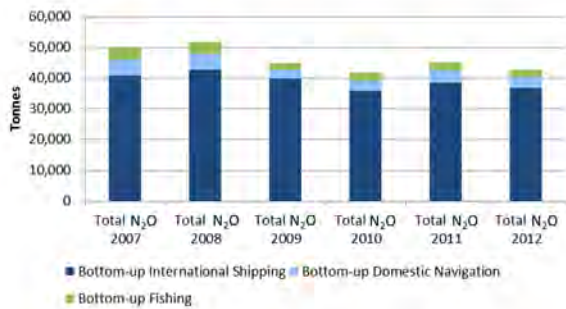


c. N<sub>2</sub>O

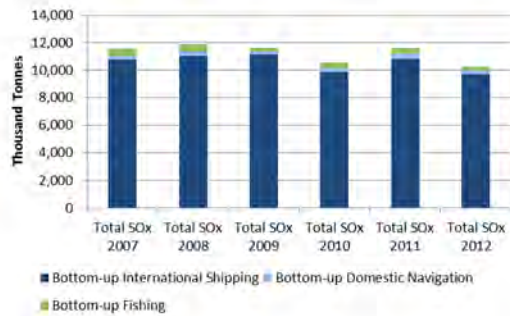


d. SO<sub>x</sub>

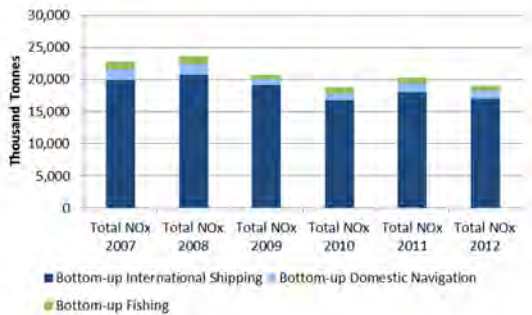


e. NO<sub>x</sub>

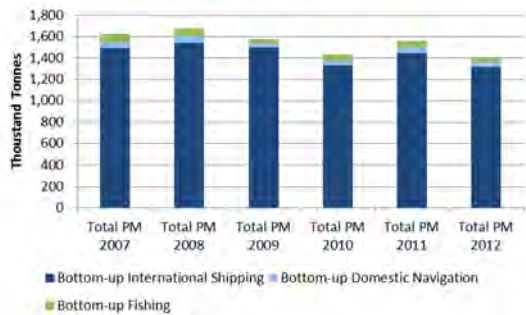

f. PM

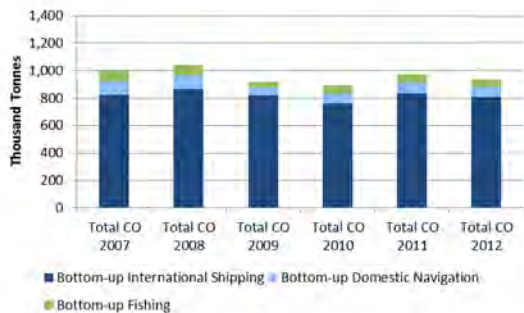

g. CO

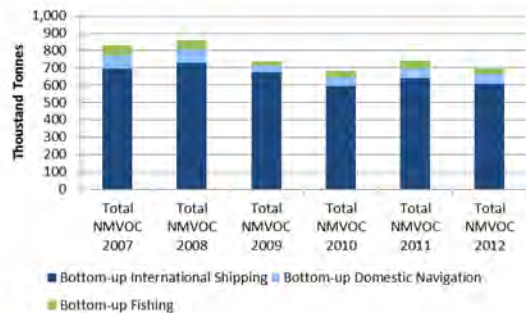

h. NMVOC

Figure 10: Time series of bottom-up results for GHGs and other substances (international shipping, domestic navigation and fishing). SO<sub>x</sub> values are preliminary and other adjustments may be made when fuel allocation results are finalised.

## Summary of Section 3: Scenarios for shipping emissions

Shipping projection scenarios are based on the Representative Concentration Pathways (RCPs) for future demand of coal and oil transport and Shared Socioeconomic Pathways (SSPs) for future economic growth. SSPs have been combined with RCPs to develop four internally consistent scenarios of maritime transport demand. These are BAU scenarios, in the sense that they assume that the current policies on the energy efficiency and emissions of ships remain in force, and that no increased stringencies or additional policies will be introduced. In line with common practice in climate research and assessment, there are multiple BAU scenarios to reflect the inherent uncertainty in projecting economic growth, demographics and the development of technology.

In addition, for each of the BAU scenarios, this study developed three policy scenarios that have increased action on either energy efficiency or emissions or both. Hence, there are two fuel-mix/ECA scenarios: one keeps the share of fuel used in ECAs constant over time and has a slow penetration of LNG in the fuel mix; the other projects a doubling of the amount of fuel used in ECAs and has a higher share of LNG in the fuel mix. Moreover, two efficiency trajectories are modelled: the first assumes an ongoing effort to increase the fuel efficiency of new and existing ships, resulting in a 60% improvement over the 2012 fleet average by 2050; the second assumes a 40% improvement by 2050. In total, emissions are projected for 16 scenarios.

### Maritime transport demand projections

The projections of demand for international maritime transport show a rapid increase in demand for unitized cargo transport, as it is strongly coupled to GDP and statistical analyses show no sign of demand saturation. The increase is largest in the SSP that projects the largest increase of global GDP (SSP5) and relatively more modest in the SSP with the lowest increase (SSP3). Non-coal dry bulk is a more mature market where an increase in GDP results in a modest increase in transport demand.

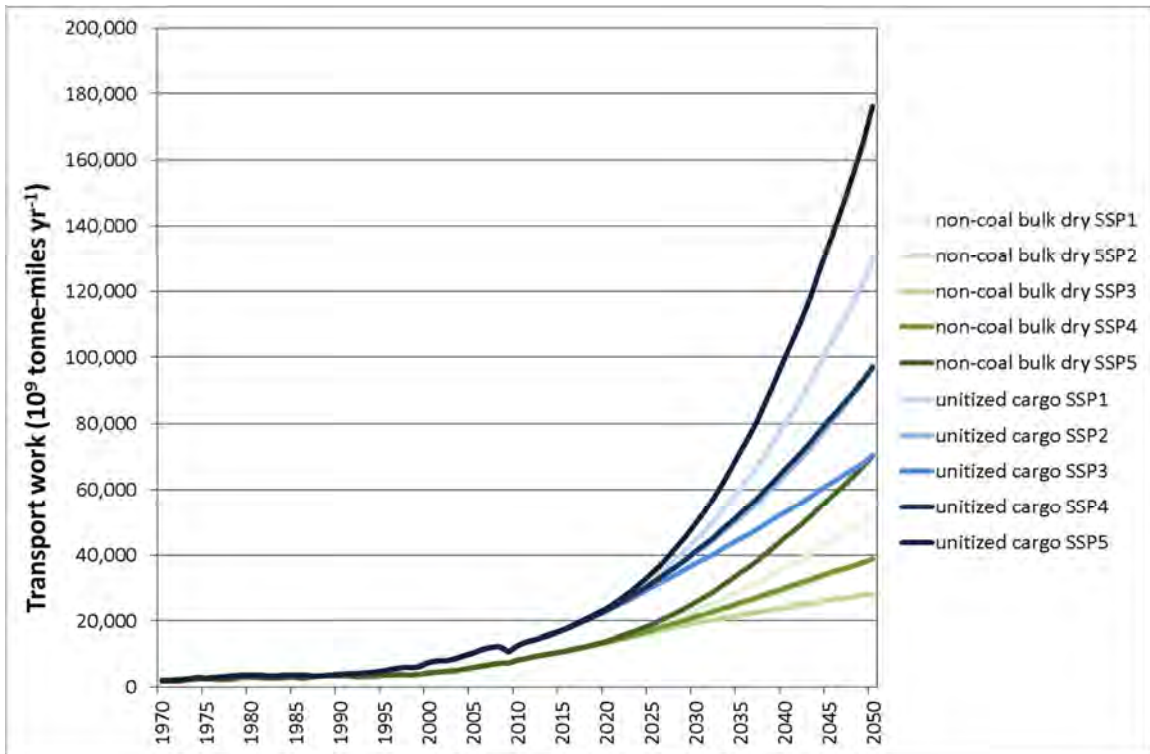


Figure 11: Historical data to 2012 on global transport work for non-coal combined bulk dry cargoes and other dry cargoes (billion tonne-miles) coupled to projections driven by GDPs from SSP1 through to SSP5 by 2050.

Demand for coal and oil transport has historically been strongly linked to GDP. However, because of climate policies resulting in a global energy transition, the correlation may break down. Energy transport demand projections are based on projections of energy demand in the RCPs. The demand for transport of fossil fuels is projected to decrease in RCPs that result in modest global average temperature increases (e.g. RCP 2.6) and to continue to increase in RCPs that result in significant global warming (e.g. RCP 8.5).

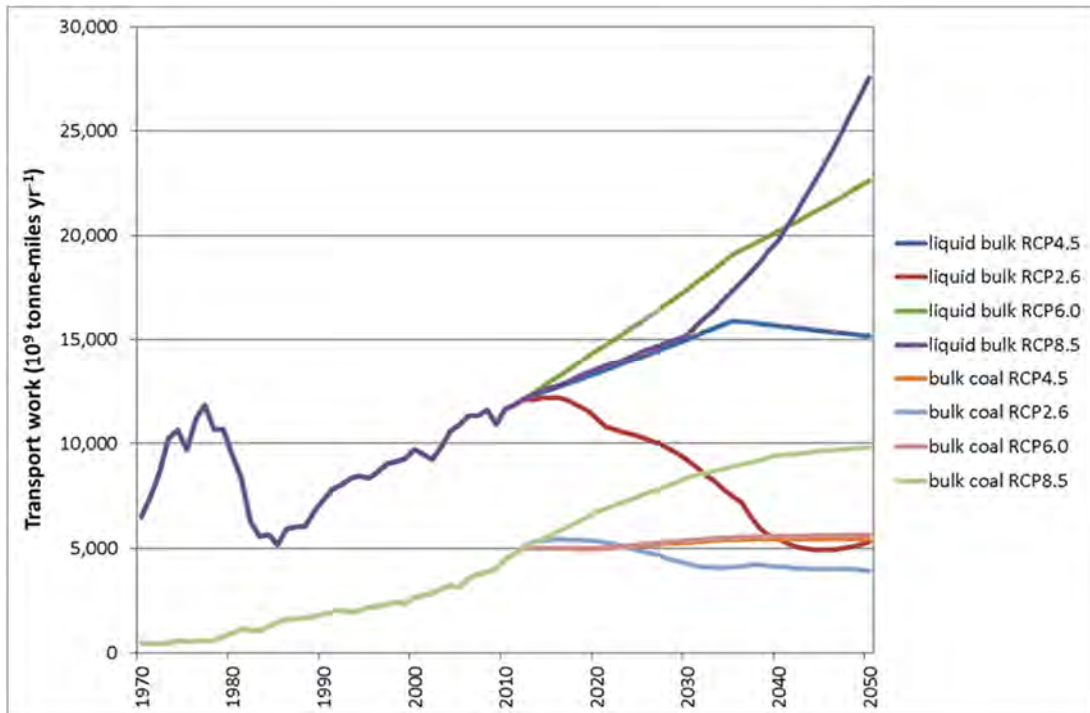


Figure 12: Historical data to 2012 on global transport work for ship-transported coal and liquid fossil fuels (billion tonne-miles) coupled to projections of coal and energy demand driven by RCPs 2.6, 4.5, 6.0 and 8.5 by 2050.

## Maritime emissions projections

Maritime CO<sub>2</sub> emissions are projected to increase significantly. Depending on future economic and energy developments, our four BAU scenarios project an increase of between 50% and 250% in the period up to 2050 (see [Figure 13](#)). Further action on efficiency and emissions could mitigate emissions growth, although all but one scenarios project emissions in 2050 to be higher than in 2012, as shown in [Figure 14](#).

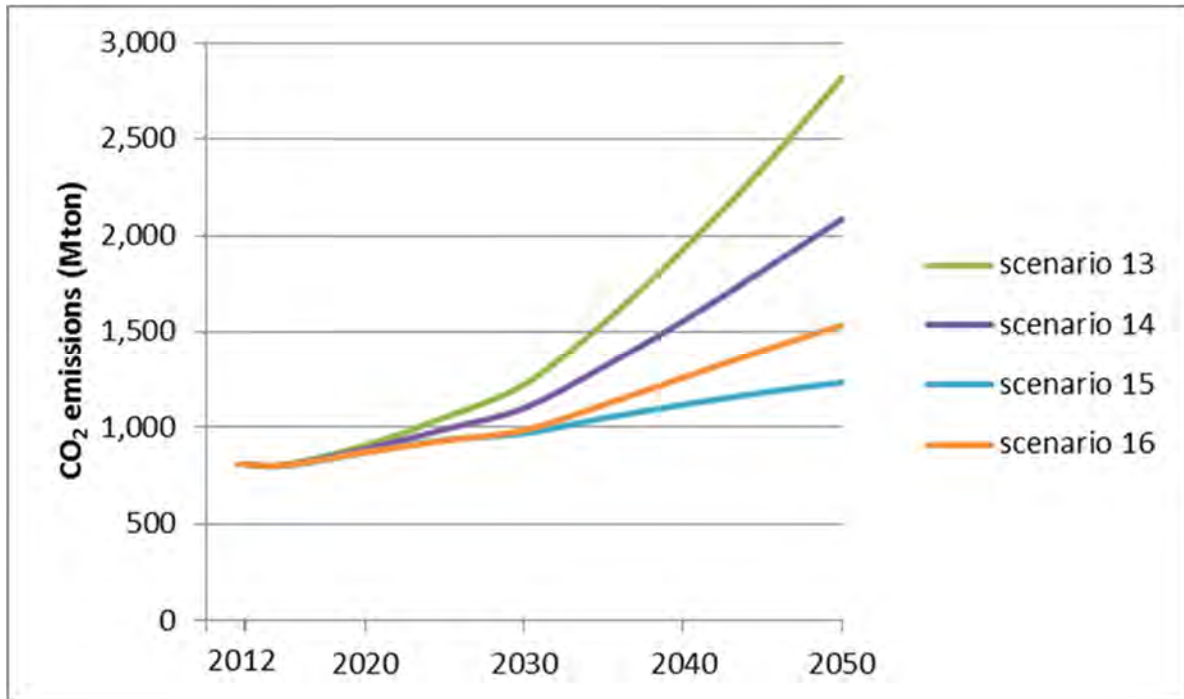


Figure 13: BAU projections of CO<sub>2</sub> emissions from international maritime transport 2012–2050.


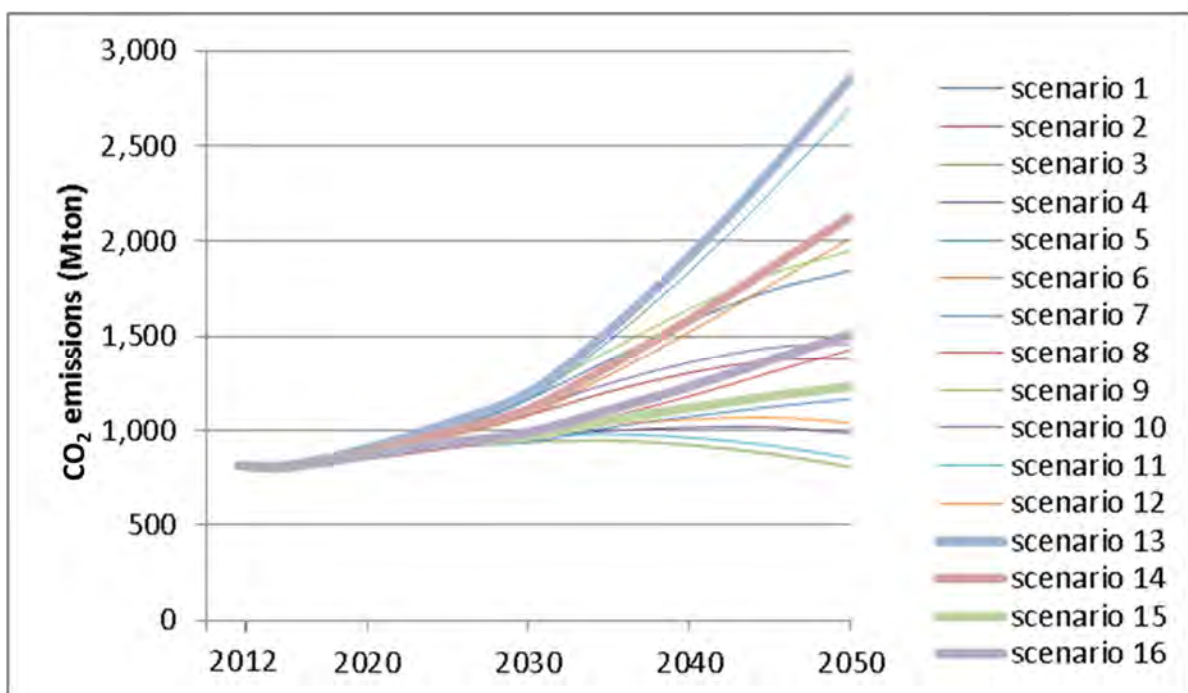


Figure 14: Projections of CO<sub>2</sub> emissions from international maritime transport. Bold lines are BAU scenarios. Thin lines represent either greater efficiency improvement than BAU or additional emissions controls or both.

Figure 15 shows the impact of market-driven or regulatory-driven improvements in efficiency contrasted with scenarios that have a larger share of LNG in the fuel mix. These four emissions projections are based on the same transport demand projections. The two lower projections assume an efficiency improvement of 60% instead of 40% over 2012 fleet average levels in 2050. The first and third projections have a 25% share of LNG in the fuel mix in 2050 instead of 8%. Under these assumptions, improvements in efficiency have a larger impact on emissions trajectories than changes in the fuel mix.

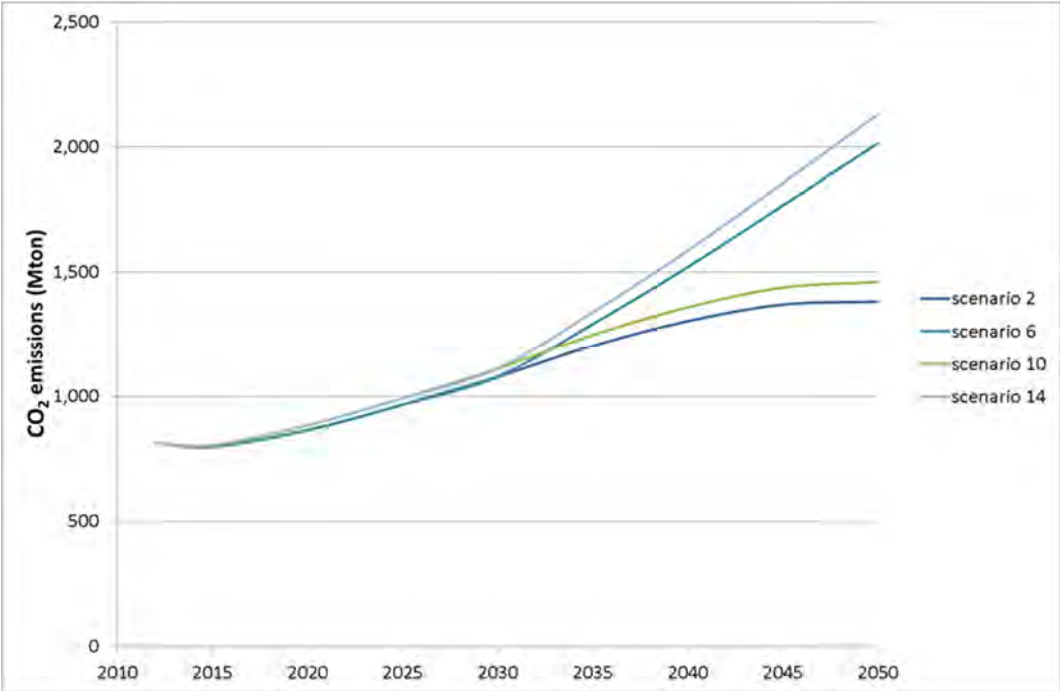

**Figure 15: Projections of CO<sub>2</sub> emissions from international maritime transport under the same demand projections. Larger improvements in efficiency have a higher impact on CO<sub>2</sub> emissions than a larger share of LNG in the fuel mix.**

Table 5 shows the projection of the emissions of other substances. For each year, the median (minimum–maximum) emissions are expressed as a share of their 2012 emissions. Most emissions increase in parallel with CO<sub>2</sub> and fuel, with some notable exceptions. Methane emissions are projected to increase rapidly (albeit from a very low base) as the share of LNG in the fuel mix increases. Emissions of sulphurous oxides, nitrogen oxides and particulate matter increase at a lower rate than CO<sub>2</sub> emissions. This is driven by MARPOL Annex VI requirements on the sulphur content of fuels (which also impact PM emissions) and the NO<sub>x</sub> technical code. In scenarios that assume an increase in the share of fuel used in ECAs, the impact of these regulations is stronger.

**Table 5: Summary of the scenarios for future emissions from international shipping, GHGs and other relevant substances.**

|                              |                  | Scenario     | 2012<br>index<br>(2012 =<br>100) | 2020<br>index<br>(2012 = 100) | 2050<br>index<br>(2012 = 100) |
|------------------------------|------------------|--------------|----------------------------------|-------------------------------|-------------------------------|
| Greenhouse gases             | CO <sub>2</sub>  | low LNG      | 100                              | 111 (107–111)                 | 240 (105–352)                 |
|                              |                  | high LNG     | 100                              | 109 (104–109)                 | 227 (99–332)                  |
|                              | CH <sub>4</sub>  | low LNG      | 100                              | 1,600 (1,600–<br>1,600)       | 14,000 (6,000–<br>20,000)     |
|                              |                  | high LNG     | 100                              | 7,800 (7,500–<br>7,800)       | 42,000 (18,000–<br>62,000)    |
|                              | N <sub>2</sub> O | low LNG      | 100                              | 111 (107–111)                 | 238 (104–349)                 |
|                              |                  | high LNG     | 100                              | 108 (103–108)                 | 221 (96–323)                  |
|                              | HFC              |              | 100                              | 108 (105–108)                 | 216 (109–304)                 |
| PFC                          |                  | -            | -                                | -                             |                               |
| SF <sub>6</sub>              |                  | -            | -                                | -                             |                               |
| Other relevant<br>substances | NO <sub>x</sub>  | constant ECA | 100                              | 110 (105–110)                 | 211 (92–310)                  |
|                              |                  | more ECAs    | 100                              | 102 (98–102)                  | 171 (75–250)                  |
|                              | SO <sub>x</sub>  | constant ECA | 100                              | 65 (63–65)                    | 39 (17–57)                    |
|                              |                  | more ECAs    | 100                              | 57 (54–57)                    | 25 (11–37)                    |
|                              | PM               | constant ECA | 100                              | 99 (95–99)                    | 199 (87–292)                  |
|                              |                  | more ECAs    | 100                              | 83 (79–83)                    | 127 (56–186)                  |
|                              | NMVOC            | constant ECA | 100                              | 111 (107–111)                 | 241 (105–353)                 |
|                              |                  | more ECAs    | 100                              | 109 (105–109)                 | 230 (101–337)                 |
|                              | CO               | constant ECA | 100                              | 115 (110–115)                 | 271 (118–397)                 |
|                              |                  | more ECAs    | 100                              | 127 (121–127)                 | 324 (141–474)                 |

Note: Emissions of PFC and SF<sub>6</sub> from international shipping are insignificant.

## Summary of the data and methods used (Sections 1, 2 and 3)

### Key assumptions and method details

Assumptions are made in Sections 1, 2 and 3 for the best-estimate international shipping inventories and scenarios. The assumptions are chosen on the basis of their transparency and connection to high-quality, peer-reviewed sources. Further justification for each of these assumptions is presented and discussed in greater detail in Sections 1.4 and 2.4. The testing of key assumptions consistently demonstrates that they are of high quality. The uncertainty analysis in Section 1.5 examines variations in the key assumptions, in order to quantify the consequences for the inventories. For future scenarios, assumptions are also tested through the deployment of multiple scenarios to illustrate the sensitivities of trajectories of emissions to different assumptions. Key assumptions made are that:

- the IEA data on marine fuel sales are representative of shipping's fuel consumption;
- in 2007 and 2008, the number of days that a ship spends at sea per year can be approximated by the associated ship type- and size-specific days at sea given in the Second IMO GHG Study 2009 (for the year 2007);
- in 2009, the number of days that a ship spends at sea per year can be approximated by a representative sample of LRIT data (approximately 10% of the global fleet);
- in 2010–2012, the annual days at sea can be derived from a combined satellite and shore-based AIS database;
- in all years, the time spent at different speeds can be estimated from AIS observations of ship activity, even when only shore-based AIS data are available (2007–2009);
- in all years, the total number of active ships is represented by any ship defined as in service in the IHSF database;
- ships observed in the AIS data that cannot be matched or identified in the IHSF data must be involved in domestic shipping only;
- combinations of RCPs and SSPs can be used to derive scenarios for future transport demand of shipping; and
- technologies that could conceivably reduce ship combustion emissions to zero (for GHGs and other substances) will either not be available or not be deployed cost-effectively in the next 40 years on both new or existing ships.

### Inventory estimation methods overview (Sections 1 and 2)

Top-down and bottom-up methods provide two different and independent analysis tools for estimating shipping emissions. Both methods are used in this study.

The top-down estimate mainly used data on marine bunker sales (divided into international, domestic and fishing sales) from the IEA. Data availability for 2007–2011 enabled top-down analysis of annual emissions for these years. In addition to the marine bunker fuel sales data, historical IEA statistics were used to understand and quantify the potential for misallocation in the statistics resulting in either under- or overestimations of marine energy use and emissions. The bottom-up estimate combined the global fleet technical data (from IHSF) with fleet activity data derived from AIS observations. Estimates for individual ships in the IHSF database were aggregated by vessel category to provide statistics describing activity, energy use and emissions



for all ships for each of the years 2007–2012. For each ship and each hour of that ship's operation in a year, the bottom-up model relates speed and draught to fuel consumption using equations similar to those deployed in the Second IMO GHG Study 2009 and the wider naval architecture and marine engineering literature. Until the Third IMO GHG Study 2014, vessel activity information was obtained from shore-based AIS receivers with limited temporal and geographical coverage (typically a range of approximately 50nmi) and this information informed general fleet category activity assumptions and average values. With low coverage comes high uncertainty about estimated activity and, therefore, uncertainty in estimated emissions. To address these methodological shortcomings and maximize the quality of the bottom-up method, the Third IMO GHG Study 2014 has accessed the most globally representative set of vessel activity observations by combining AIS data from a variety of providers (both shore-based and satellite-received data), shown in [Figure 16](#).


The AIS data used in this study provide information for the bottom-up model describing a ship's identity and its hourly variations in speed, draught and location over the course of a year.

This work advances the activity-based modelling of global shipping by improving geographical and temporal observation of ship activity, especially for recent years.

**Table 6: AIS observation statistics of the fleet identified in the IHSF database as in service in 2007 and 2012.**

|      | Total in-service ships | Average % of in-service ships observed on AIS (all ship types) | Average % of the hours in the year each ship is observed on AIS (all ship types) |
|------|------------------------|--|--|
| 2007 | 51,818                 | 76%  | 42%  |
| 2012 | 56,317                 | 83%  | 71%  |

In terms of both space and time, the AIS data coverage is not consistent year-on-year during the period studied (2007–2012). For the first three years (2007–2009), no satellite AIS data were available, only AIS data from shore-based stations. This difference can be seen by contrasting the first (2007) and last (2012) years' AIS data sets, as depicted for their geographical coverage in [Figure 16](#). [Table 6](#) describes the observation statistics (averages) for the different ship types. These data cannot reveal the related high variability in observation depending on ship type and size. Larger oceangoing ships are observed very poorly in 2007 (10–15% of the hours of the year) and these observations are biased towards the coastal region when the ships are either moving slowly as they approach or leave ports, at anchor or at berth. Further details and implications of this coverage for the estimate of shipping activity are discussed in greater detail in Sections 1.2, 1.4 and 1.5.

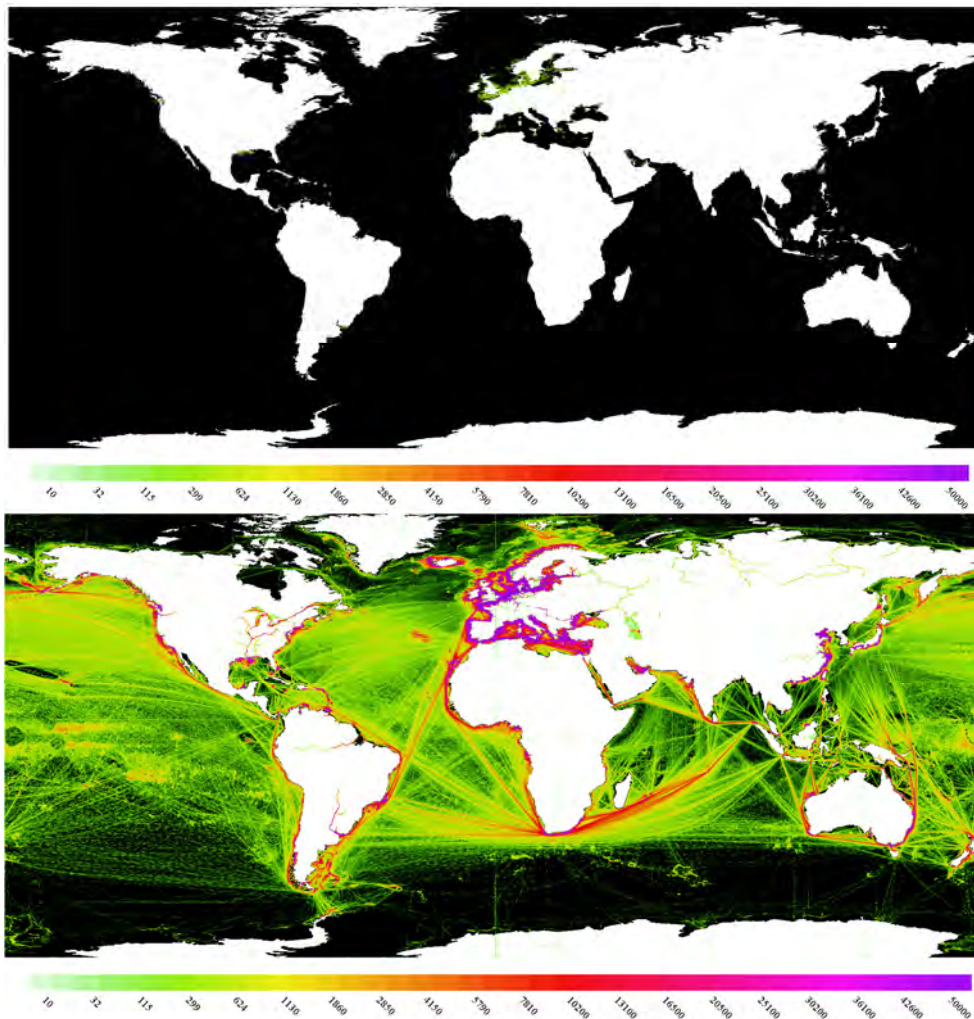

**Figure 16: Geographical coverage in 2007 (top) and 2012 (bottom), coloured according to the intensity of messages received per unit area. This is a composite of both vessel activity and geographical coverage; intensity is not solely indicative of vessel activity.**

AIS coverage, even in the best year, cannot obtain readings of vessel activity 100% of the time. This can be due to disruption to satellite or shore-based reception of AIS messages, the nature of the satellite orbits and interruption of a ship's AIS transponder's operation. For the time periods when a ship is not observed on AIS, algorithms are deployed to estimate the unobserved activity. In 2010, 2011 and 2012, those algorithms deploy heuristics developed from the observed fleet. However, with the low level of coverage in 2007, 2008 and 2009, the consortium had to use methods similar to previous studies that combined sparse AIS-derived speed and vessel activity characteristics with days-at-sea assumptions. These assumptions were based on the Second IMO GHG Study 2009 expert judgements. Conservatively, the number of total days at sea is held constant for all three years (2007–2009) as no alternative, more reliable, source of data exists for these years.

Given the best available data, and by minimizing the amount of unobserved activity, uncertainties in both the top-down and the bottom-up estimates of fuel consumption can be more directly quantified than previous global ship inventories. For the bottom-up method, this study investigates these uncertainties in two ways:


1. The modelled activity and fuel consumption are validated against two independent data sources (Section 1.4):

- a. LRIT data were obtained for approximately 8,000 ships and four years (2009–2012) and used to validate both the observed and unobserved estimates of the time that a ship spends in different modes (at sea, in port), as well as its speeds.
  - b. Noon report data were collected for 470 ships for the period 2007-2012 (data for all ships were available in 2012, with fewer ships' data available in earlier years). The data were used to validate both the observed and unobserved activity estimates and the associated fuel consumption.
2. The comparison between the modelled data and the validation data samples enabled the uncertainty in the model to be broken down and discussed in detail. An analysis was undertaken to quantify the different uncertainties and their influence on the accuracy of the estimation of a ship's emissions in a given hour and a given year, and the emissions of a fleet of similar ships in a given year.

**Figure 17** presents the comparison of bottom-up and noon-reported data used in the validation process of 2012 analysis (further plots and years of data are included in Section 1.4). For each comparison, a ship is identified by its IMO number in the two data sets so that the corresponding quarterly noon report and bottom-up model output can be matched. The red line represents an ideal match (equal values) between the bottom-up and noon-report outputs, the solid black line the best fit through the data and the dotted black lines the 95% confidence bounds on the best fit. The "x" symbols represent individual ships, coloured according to the ship-type category as listed in the legend.

The comparative analysis demonstrates that there is a consistent and robust agreement between the bottom-up method and the noon-report data at three important stages of the modelling:

1. The average at-sea speed plot demonstrates that, in combination with high coverage AIS data, the extrapolation algorithm estimates key activity parameters (e.g. speed) with high reliability.
2. The average daily fuel consumption plot demonstrates the reliability of the marine engineering and naval architecture relationships and assumptions used in the model to convert activity into power and fuel consumption.
3. The total quarterly fuel consumption plot demonstrates that the activity data (including days at sea) and the engineering assumptions combine to produce generally reliable estimates of total fuel consumption. The underestimate in the daily fuel consumption of the largest containerships can also be seen in this total quarterly fuel consumption.

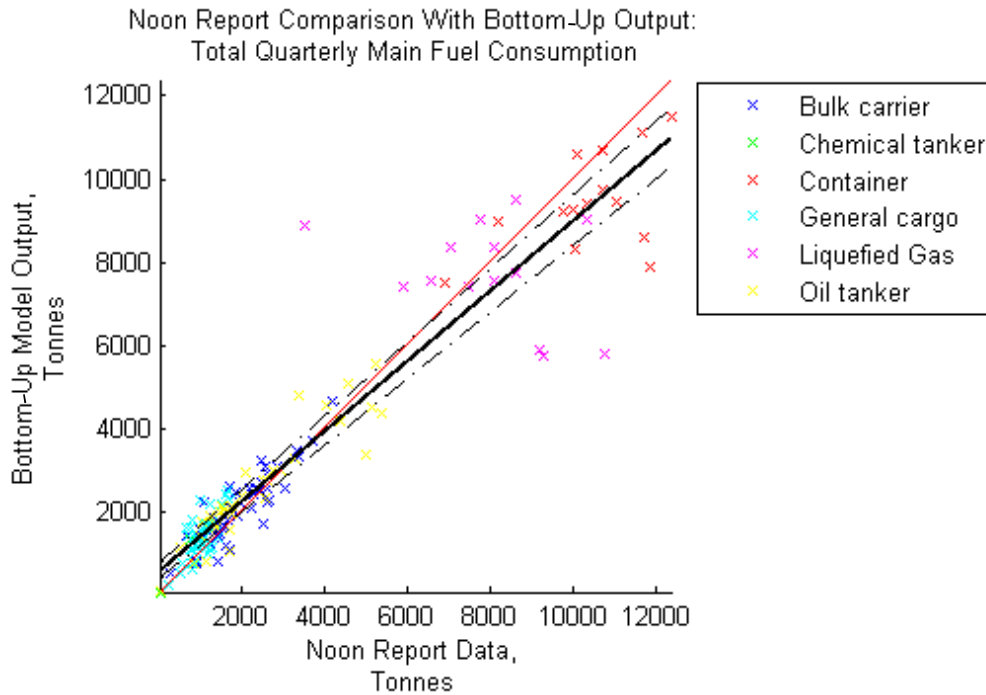

**Figure 17: Total noon-reported quarterly fuel consumption of the main engine, compared with the bottom-up estimate over each quarter of 2012, with a filter to select only days with high reliability observations of the ship for 75% of the time or more.**

### Scenario estimation method overview (Section 3)

The consortium developed emissions projections by modelling the international maritime transport demand and allocating it to ships, projecting regulation- and market-driven energy efficiency changes for each ship. These are combined with fuel-mix scenarios and projections for the amount of fuel used by international maritime transport. For most emissions, the energy demand is then multiplied by an emissions factor to arrive at an emissions projection.

The basis for the transport demand projections is a combination of RCPs and SSPs that have been developed for the IPCC. The RCPs contain detailed projections about energy sources, which is relevant for fossil fuel transport projections. The SSPs contain long-term projections of demographic and economic trends, which are relevant for the projections of demand for transport of non-energy cargoes. RCPs and SSPs are widely used across the climate community.

The long-term projections are combined with a statistical analysis of historical relationships between changes in transport demand, economic growth and fossil fuel consumption.

The energy efficiency improvement projections are part regulation-driven, part market-driven. The relevant regulations are the EEDI for new ships, and the SEEMP for all ships. Market-driven efficiency improvements have been calculated using MACCs.

# 1. Inventories of CO<sub>2</sub> from international shipping 2007–2012

## 1.1. Top-down CO<sub>2</sub> inventory calculation method

### 1.1.1. Introduction

Section 1.1 provides a top-down estimate of emissions from shipping for the period 2007–2012. This task also provides a comparison of this update with the methods used in the IMO GHG Study 2009. The top-down approach is based on statistical data derived from fuel delivery reports to internationally registered vessels. The top-down approach also considers allocation to domestic and international shipping, as reported in national statistics.

Calculations of emissions using top-down fuel consumption estimates are presented. For CO<sub>2</sub>, these estimates use CO<sub>2</sub> emissions factors consistent with those used in the bottom-up calculations in Section 1.2. Specifically, the top-down inventory uses CO<sub>2</sub> emissions factors reported in Section 2.2.7. For marine fuel oil (HFO), this study uses 3.114 grams CO<sub>2</sub> per gram fuel; for marine gas oil (MDO), this study uses 3.206 grams CO<sub>2</sub> per gram fuel; and for natural gas (LNG), this study uses 2.75 grams CO<sub>2</sub> per gram fuel.

### 1.1.2. Methods for review of IEA data

The World Energy Statistics energy balance statistics published by the IEA are used both in the IMO GHG Study 2009 and this study. Both studies reviewed several years of IEA data, mainly as a quality assurance measure, but IEA statistics provided the main top-down comparator with bottom-up results in that study.

The second IMO GHG Study 2009 used IEA data for 1971–2005 (2007 edition). Two types of oil product (fuel oil and gas/diesel) and three sectors (international marine bunkers, domestic navigation and fishing) were reported, and the study subsequently projected those data for 2007 using tonne-miles transported.

For this study, the consortium reviewed data from IEA (2013) for all available years. Figure 18 shows the long-run statistics for total marine consumption of energy products (international, domestic and fishing) over the period 2007–2011. IEA statistics for international marine bunkers, domestic navigation and fishing data were specifically examined for the fuels known to be most used by ships: fuel oil (residual), gas diesel oil, motor gasoline, lubricants, non-specified fuel and natural gas fuel.

IEA statistics indicate that marine bunker consumption volumes of motor gasoline, lubricants, non-specified fuel and natural gas are very small. Each of these features as less than 0.10% of fuel oil consumption as international marine bunkers. Considering domestic and international marine fuels together, only motor gasoline is reported at quantities equivalent to more than 1% of fuel oil used by ships. No natural gas is reported as international marine bunkers consumption in IEA (2013), but a small quantity of natural gas is reported for domestic navigation and fishing.

Other energy products are used in shipping, such as a small amount of primary solid biofuels (domestic and fishing) and heat and electricity (exclusively in fishing). Given that the statistics identify none of these fuels as used in international shipping, and given their very small volumes, these fuels were determined to be outside the scope for this study. Therefore, comparison of top-down statistics is limited to fuel oil (HFO), gas diesel oil (MDO) and natural gas (NG).

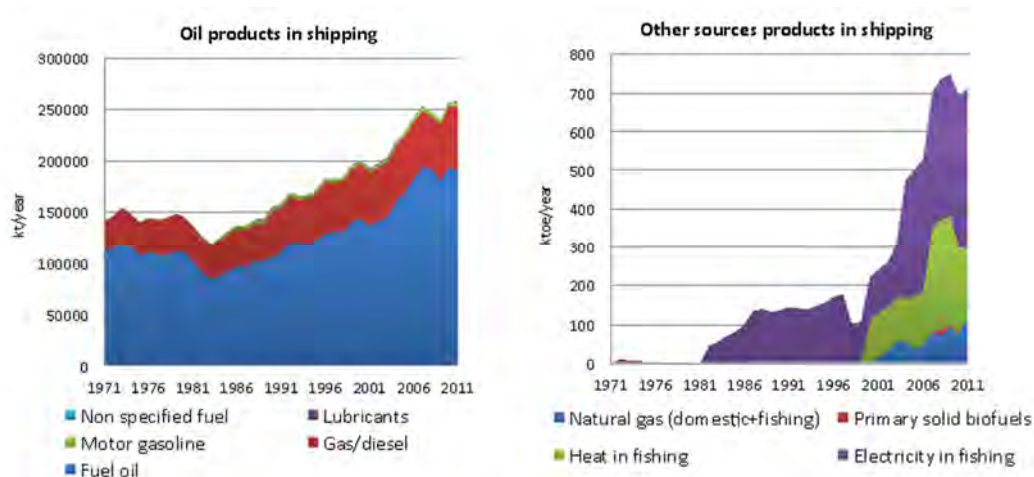


Figure 18 Oil products and products from other sources used in shipping (international, domestic and fishing) 1971–2011.

There are significant gaps in the IEA (2013) data for 2012, at the time of this analysis. For example, international navigation fuel sales were available for only 29 countries, representing less than 20% of total sales in 2011 (see Table 7). The IEA acknowledges that recent data are based on mini-questionnaires from OECD nations and supply data for non-OECD nations; 2012 marine fuel statistics will be updated in future editions (IEA 2013). The IMO Secretariat scope specifies that the IMO GHG Study 2014 should compute annual emissions ‘as far as statistical data are available’. Therefore, given incomplete data, this work excludes year 2012 from this top-down analysis.

Table 7 Comparison of 2011 and 2012 marine fuels reporting to IEA.

| Nations reporting  | 2011               |                      | 2012               |                      |
|--|--------------------|----------------------|--------------------|----------------------|
|  | Fuel oil (ktonnes) | Gas/diesel (ktonnes) | Fuel oil (ktonnes) | Gas/diesel (ktonnes) |
| 29 reporting nations in 2012 (Australia, Belgium, Canada, Chile, Denmark, Estonia, Finland, France, Germany, Greece, Iceland, Ireland, Israel, Italy, Japan, Korea, Mexico, Netherlands, New Zealand, Norway, Poland, Portugal, Slovenia, Spain, Sweden, Switzerland, Turkey, United Kingdom, United States) | 74,833             | 16,479               | 70,359             | 17,532               |
| Other 98 nations reporting in 2011   | 102,658            | 12,655               |                    |                      |
| <b>Percent of 2011 fuel reported by 29 nations reporting in 2012</b>   | <b>42%</b>         | <b>57%</b>           |                    |                      |

### 1.1.3. Top-down fuel consumption results

This section presents the IMO GHG Study 2014 top-down results for the period of 2007–2011.

#### Review of IMO GHG Study 2009 top-down estimates

The consortium reviewed the IMO GHG Study 2009 results, including updates based on current versions of IEA statistics. Table 8 presents a summary of the information reported in the IMO GHG Study 2009 (from Appendix 1, Tables A1–17), with updated information from the IEA (2013) World Energy Statistics.

It is important to note that top-down information reported in the IMO GHG Study 2009 is not definitive. First, the estimated value for 2007 (derived from 2005 using a tonne-miles

adjustment in the IMO GHG Study 2009) can be compared with the IEA value reported in today's World Energy Statistics. The 2007 IEA value is approximately 9% greater than the estimated 2007 value in the IMO GHG Study 2009. Second, the IEA updated the 2005 reported value is an amended total for all marine fuels that is approximately 5% greater than the published IEA data used in the IMO GHG Study 2009. Most of that difference results from amended statistics for domestic navigation and fishing, with IEA statistics updates for marine fuels that are less than 2% of the values reported in the 2009 study. Lastly, the IEA statistics explicitly designate whether the fuel data aggregate was originally allocated to vessels identified as international shipping, domestic shipping or fishing. These categories are defined by the IEA and described in the Key Definitions section of this report. IEA definitions are consistent with IPCC 2006 guidelines.

**Table 8 Comparison of IMO GHG Study 2009 top-down ship fuel consumption data (million tonnes).**

| Marine sector                | Fuel type | IMO GHG Study 2009 |            | Current IEA                          |            |            |            |
|------------------------------|-----------|--------------------|------------|--------------------------------------|------------|------------|------------|
|                              |           | 2005               | 2007       | 2004                                 | 2005       | 2006       | 2007       |
| International marine bunkers | HFO       | 150                | 159        | 144                                  | 153        | 164        | 174        |
|                              | MDO       | 26                 | 27         | 28                                   | 26         | 27         | 26         |
| <b>International total</b>   |           | <b>176</b>         | <b>186</b> | <b>172</b>                           | <b>179</b> | <b>191</b> | <b>200</b> |
| Domestic navigation          | HFO       | 13                 | 14         | 17                                   | 17         | 18         | 20         |
|                              | MDO       | 20                 | 21         | 20                                   | 21         | 22         | 23         |
| <b>Domestic total</b>        |           | <b>33</b>          | <b>35</b>  | <b>37</b>                            | <b>38</b>  | <b>40</b>  | <b>43</b>  |
| Fishing                      | HFO       | 0                  | 1          | 1                                    | 1          | 1          | 1          |
|                              | MDO       | 5                  | 6          | 6                                    | 7          | 6          | 5          |
| <b>Fishing total</b>         |           | <b>5</b>           | <b>7</b>   | <b>7</b>                             | <b>8</b>   | <b>7</b>   | <b>6</b>   |
| Total                        |           | 214                | 228        | 216                                  | 225        | 238        | 249        |
|                              |           |                    |            | % difference from IMO GHG Study 2009 |            |            |            |
|                              |           |                    |            | 5%                                   |            | 9%         |            |

#### Top-down results for the period 2007–2011

Fuel statistics allocated to international shipping, domestic navigation and fishing are presented in Figure 19–Figure 21 and Table 9. Figure 19 shows a generally flat trend in fuel oil consumption statistics since 2007 for each shipping category (fishing, international navigation and domestic navigation). Similarly, Figure 20 shows a generally increasing trend for gas/diesel while Figure 21 shows an increasing trend in natural gas sales in domestic shipping and interannual variation in natural gas sales to fishing vessels.

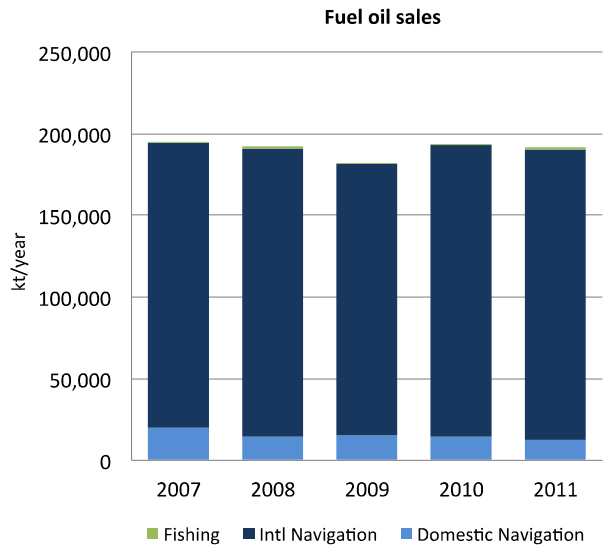


Figure 19 IEA fuel oil sales in shipping 2007–2011.

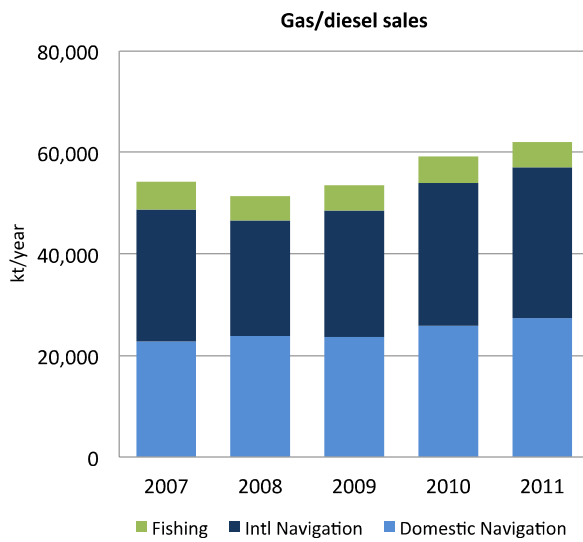


Figure 20 IEA gas/diesel sales in shipping 2007–2011.

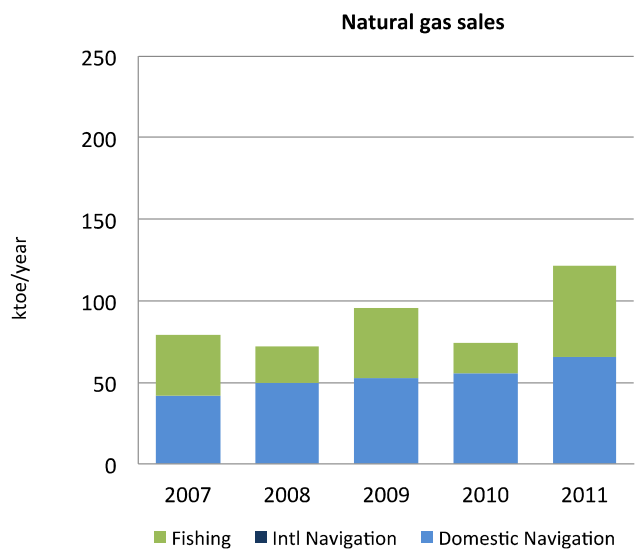


Figure 21 IEA natural gas sales in shipping 2007–2011.



The IEA statistics explicitly designate fuel to ships as either international or domestic navigation, while fishing vessel fuel statistics group international and domestic fishing activities together from 2007. The allocation of total marine fuels provided to ships depends upon the data quality aggregated by the IEA from national fuel reports and ancillary statistical sources. (Issues of data quality and uncertainty in IEA statistics are addressed in Sections 1.4 and 1.5.) For completeness, this section reports the top-down allocation provided in the IEA statistics for all three marine fuel designations.

Table 9 reports a summary of IEA data of the fuels most used in shipping over the three different categories in million tonnes, where natural gas data were converted to tonnes oil equivalent using IEA unit conversions (1TJ = 0.0238845897 ktoe).

**Table 9 Summary of the IEA fuels sales data in shipping (million tonnes).**

| <b>Marine sector</b>         | <b>Fuel type</b> | <b>2007</b>   | <b>2008</b>   | <b>2009</b>   | <b>2010</b>   | <b>2011</b>   |
|------------------------------|------------------|---------------|---------------|---------------|---------------|---------------|
| International marine bunkers | HFO              | 174.1         | 177.0         | 165.9         | 178.9         | 177.9         |
|                              | MDO              | 26.0          | 22.7          | 24.9          | 28.2          | 29.6          |
|                              | NG               | 0             | 0             | 0             | 0             | 0             |
| <b>International total</b>   |                  | <b>200.1</b>  | <b>199.7</b>  | <b>190.8</b>  | <b>207.1</b>  | <b>207.5</b>  |
| Domestic navigation          | HFO              | 19.9          | 14.2          | 15.3          | 14.3          | 12.7          |
|                              | MDO              | 22.7          | 23.9          | 23.6          | 25.7          | 27.4          |
|                              | NG               | 0.04          | 0.05          | 0.05          | 0.05          | 0.07          |
| <b>Domestic total</b>        |                  | <b>42.64</b>  | <b>38.15</b>  | <b>38.95</b>  | <b>40.05</b>  | <b>40.17</b>  |
| Fishing                      | HFO              | 1.1           | 1.1           | 1.0           | 0.8           | 0.8           |
|                              | MDO              | 5.4           | 4.9           | 5.0           | 5.2           | 5.1           |
|                              | NG               | 0.04          | 0.02          | 0.04          | 0.02          | 0.05          |
| <b>Fishing total</b>         |                  | <b>6.54</b>   | <b>6.02</b>   | <b>6.04</b>   | <b>6.02</b>   | <b>5.95</b>   |
| <b>Total</b>                 |                  | <b>249.28</b> | <b>243.87</b> | <b>235.79</b> | <b>253.17</b> | <b>253.62</b> |

The time series for top-down fuel inventories reveals some correlation, which may be interpreted as a response to the economic conditions (lower fuel consumption). The consortium evaluated the top-down consumption data trends for international marine fuel oil and the world GDP trends as reported by the World Bank World Development Indicators. 'World Development Indicators (WDI) is the primary World Bank collection of development indicators, compiled from officially recognized international sources. It presents the most current and accurate global development data available, and includes national, regional and global estimates' (World Bank, November 2013).

Figure 22 illustrates this correlation graphically and shows the correlation coefficient for the past 12 years to be very high (96.5%). This trend also shows correlation with the start of economic recovery in 2009. The divergence between fuel oil consumption and GDP trends since 2010 could be a function of three factors:

1. energy efficiency measures adopted by shipping in response to price;
2. fuel switching to gas diesel or natural gas fuels;
3. a lag in shipping activity change compared to world GDP change.

Further time series and additional analysis beyond the scope of this study would be required to evaluate post-recession changes further.

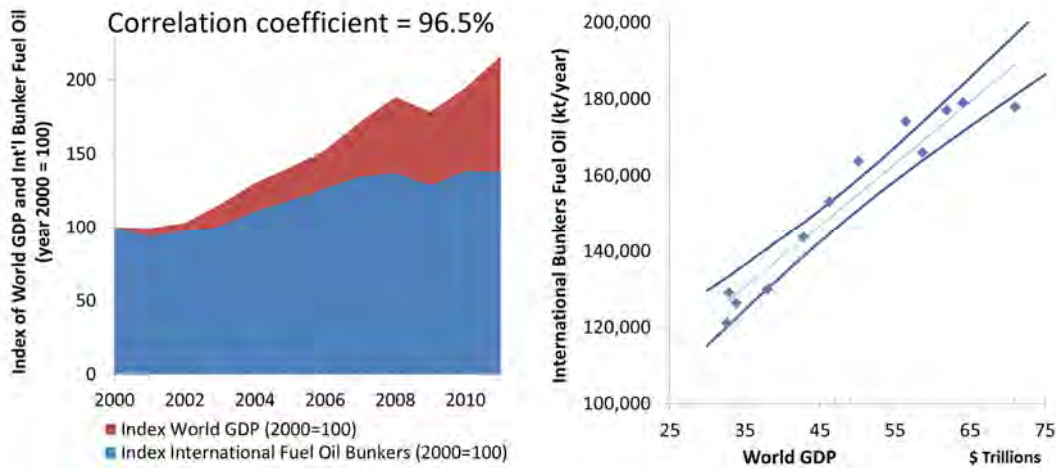


Figure 22 Correlation between world GDP and international bunkers fuel oil during the recession.

## 1.2. Bottom-up CO<sub>2</sub> inventory calculation method

The bottom-up method derives estimates of emissions from data sources describing shipping activity. The primary source of vessel activity used is the AIS data, which describe, among other things, a ship's identity, position, speed and draught at a given time-stamp. The data are transmitted by the ship with a broadcast frequency of one message every six seconds. The data are received by shore-based stations, satellites and other ships and the consortium acquired access to a number of shore-based station and satellite receiver archives. These were used to build time histories of shipping activity, which could be used, in conjunction with ship specifications, to calculate the time histories of fuel consumption and emissions. Calculations were carried out for every individual ship identified as in-service in the IHSF database and for every hour of the year.

### 1.2.1. Overall bottom-up approach

The bottom-up method is split into two stages:

1. initial estimation of observed per-ship activity, energy consumption and emissions;
2. estimation of per-ship activity and associated energy consumption and emissions for ships not observed in the AIS database.

The first stage is performed only on ships that appear coincidentally in both the IHSF and AIS databases. The second stage is performed for all ships listed as 'in-service/commission' within the IHSF database and uses estimated activity for similar ships in stage 1, in combination with IHSF technical specifications to estimate power requirements, fuel consumption and emissions. The total energy consumption and emissions for a fleet of similar ships is then found by summing the calculations for each ship, estimated either at stage 1 or stage 2. The total shipping emissions are then found by summing across all ship type and size categories. International shipping emissions are estimated by defining which ship type and size categories are involved in international shipping.

Figure 23 is a diagram of the flow of data through the processes and calculation stages that make up the bottom-up method.

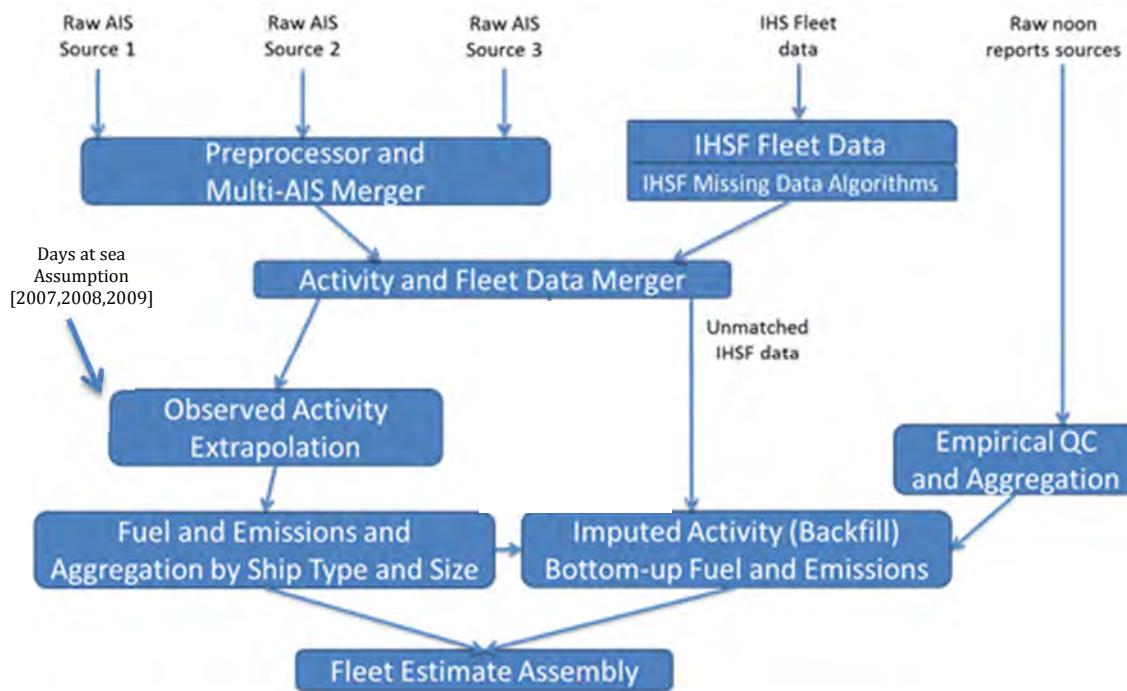


Figure 23 Data assembly and method for Sections 1.2 and 2.2.

### 1.2.2. Summary of data and method input revisions

#### Data

Access to increasingly detailed data on ships' activity was enabled by the advent of satellite-based AIS data (S-AIS), which began providing significant coverage in 2010. These data enable the specifics of any ship's operation to be identified on an hourly basis, or even more frequently if required. S-AIS brings greater fidelity to the calculation of the fleet's aggregate operational characteristics. For the first time in global inventory calculations, the activity of specific individual ships (e.g. actual vessel speed over ground) and consequent engine load and emissions can be considered as a component of an overall inventory calculation. In the IMO GHG Study 2009, a limited sample of terrestrial AIS data was used to calculate ship activity parameters (speeds, days at sea, etc.). In that study, ship activity could only be observed for a subset of the fleet and only within approximately 50nmi of available shore-based receivers (only partial coverage of coastal regions), which left the activity of vessels in the open ocean unobserved. In this study, the consortium brings together a number of datasets from both terrestrial and satellite receiver operators and merges the data to provide extensive spatial and temporal coverage of shipping activity observations. A visualisation of the merged AIS data for 2012 is shown in Figure 24.

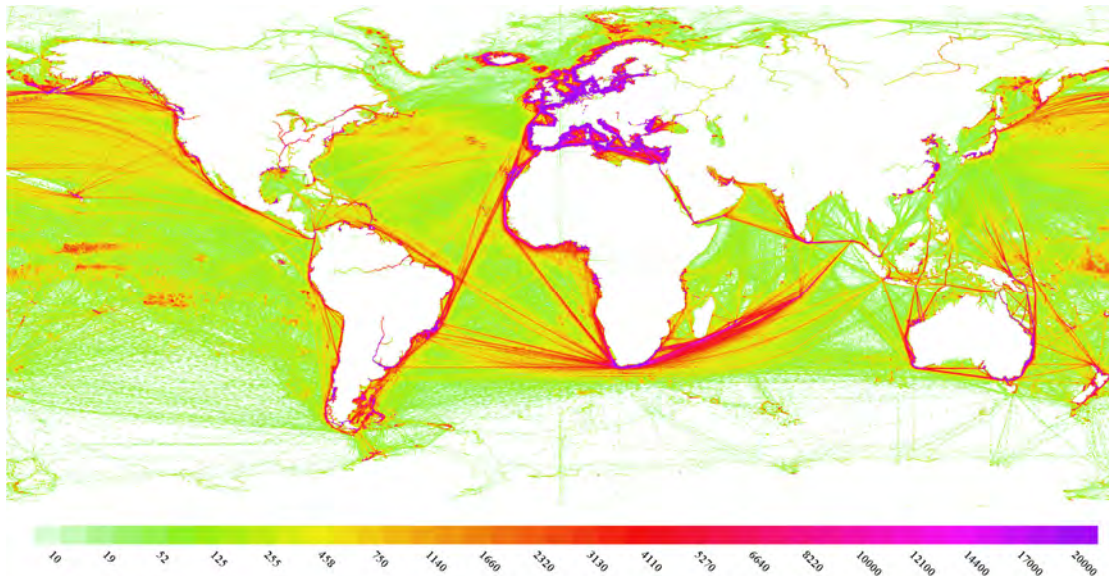


Figure 24 Chart showing the coverage of one of the merged AIS datasets used in this study (2012, all sources, but no LRIT).

Observations in the merged AIS dataset of ship activity (speeds, time spent in modes) are compared to similar data derived from samples of the global fleet from LRIT. In all, data concerning approximately 8000 ships were put together (see Section 1.4 for details). LRIT data were not used in the IMO GHG Study 2009. A visualisation of the LRIT data for 2012 is shown in Figure 25. LRIT data are of lower temporal resolution than AIS data but provide higher reliability and therefore enable important quality checks for the AIS dataset and the bottom-up calculations of average speeds and days at sea.

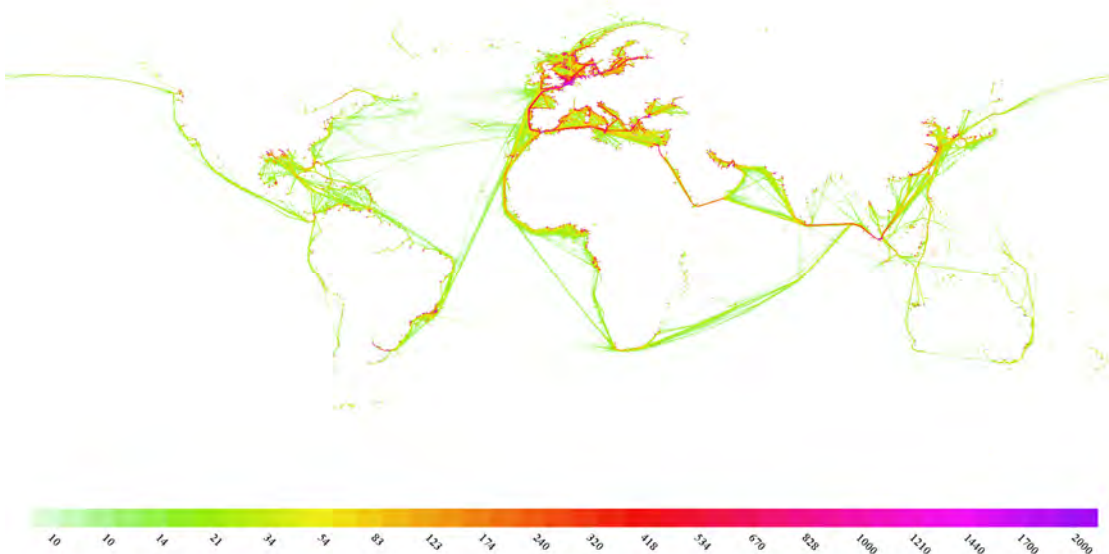


Figure 25 Chart showing the coverage of one of the LRIT datasets used in this study( 2012).

The quality of the bottom-up model's activity and fuel consumption calculations was also checked against operators' fuel consumption data, contained in noon reports and fuel audits (see Section 1.4). No equivalent data were reportedly used in the IMO GHG Study 2009.

This study uses IHSF data to obtain the technical characteristics of individual ships. While IHSF data were used in the IMO GHG Study 2009, this study includes data on the status of a ship (in-service, etc.). Ship status data are obtained on a quarterly basis, so that ships that are reportedly active only for part of the year are considered appropriately.

## Method

The method developed by the consortium to conduct this study uses a comparable structure to the methodology of the IMO GHG Study 2009 for the collation of aggregate data on activity parameters, engine load and emissions. However, it is underpinned by analysis carried out at each calculation stage on a complete database of the global fleet (i.e. all calculations are performed at the level of the individual ship with aggregation of results only used for presentation purposes). This approach avoids the potential for asymmetry or data bias that might reduce fidelity and accuracy. This represents a substantial progression in the technology and practice of activity-based inventory methods for international shipping.

### 1.2.3. Aggregation of ship types and sizes

The algorithms used for vessel aggregation, developed by the consortium, build on aggregation methodologies for the EEDI (taken from IMO MEPC.231(65), expanded for ship classes not included in EEDI) and divide vessels further into bins based on cargo capacity or ship size. The aggregations use definitions aligned as closely as possible with those used in the IMO GHG Study 2009. In some cases, however, this was not possible because the taxonomy used in the earlier study was not reported explicitly and because it did not always align with the EEDI categories. Aggregation uses the IHSF Statcode3, Statcode5, and relevant capacity fields to group similar ships. The IHSF organises vessels into four types of ship:

- cargo-carrying;
- non-merchant;
- non-seagoing merchant;
- work vessels.

Most international shipping is represented by cargo-carrying transport ships, which are the primary focus of this study. However, the other classes are needed to compare the bottom-up estimate with the top-down estimate where both international and domestic voyages by ocean-going ships may be represented. The consortium subdivided cargo-carrying vessel types into 13 classes, the non-merchant ships and non-seagoing merchant ship types into two and one classes respectively, and the work vessel type into three classes. As shown in Table 10, a total of 19 classes are defined.

For each vessel class a capacity bin system was developed to further aggregate vessels by either their physical size or cargo-carrying capacity, based on the following metrics: deadweight tonnage (dwt); 20-foot equivalent units (TEU); cubic meters (cbm); gross tonnage (gt); or vehicle capacity (see Table 10). The capacity bins are the same for all vessels in a class. Wherever possible, bin sizes are aligned to the IMO GHG study 2009 although there are some discrepancies due to differences in the class definitions. It should be noted that the IMO GHG Study 2014 provides higher resolution by class/sub-class/capacity bin than the IMO GHG Study 2009. Further details of the approach used and the definitions applied can be found in Annex 1.

**Table 10 IHSF vessel types and related vessel classes.**

| Vessel group                   | Vessel class  |
|--------------------------------|---|
| Cargo-carrying transport ships | 1. Bulk carrier<br>2. Chemical tanker<br>3. Container<br>4. General cargo<br>5. Liquified gas tanker<br>6. Oil tanker<br>7. Other liquids tanker<br>8. Ferry passengers (Pax) only<br>9. Cruise<br>10. Ferry-roll-on/passengers (Ro-Pax)<br>11. Refrigerated cargo<br>12. Roll-on/roll-off (Ro-Ro)<br>13. Vehicle |
| Non-merchant ships             | 14. Yacht<br>15. Miscellaneous – fishing <sup>1</sup>   |
| Non-seagoing merchant ships    | 16. Miscellaneous – other <sup>2</sup>  |
| Work vessels                   | 17. Service – tug<br>18. Offshore<br>19. Service – other  |

Notes: <sup>1</sup>misc. fishing vessels fall into non-merchant ships and non-seagoing merchant ships;  
<sup>2</sup>misc. other vessels fall into non-seagoing merchant ships and work vessels

#### 1.2.4. Estimating activity using AIS data

The primary purpose of AIS is to report the current location of vessels in order to avoid collisions. Under IMO regulations (SOLAS Chapter V), all vessels over 300gt on international transport (IMO, 2002) are required to carry transmitters. AIS information is reported in different message types depending on the reporting entity (e.g. vessel, base station) and the nature of the message (i.e. dynamic or static). The messages of interest for this study are static and dynamic vessel messages (see ITU 2010 for further details of message types). Dynamic messages (types 1, 2 and 3) report more frequently and provide frequently changing information, such as location and speed. Static messages (types 5 and 24) contain voyage information, such as draught, destination and (importantly) the IMO number of the vessel. Static and dynamic messages are linked through the MMSI number, which is reported in both message types. These messages are collected through receivers on land (T-AIS) and through a satellite network (S-AIS). Due to temporal and spatial coverage issues, explained elsewhere (Smith et al. 2012; IMO GHG Study 2009), quality can be improved using a combination of these sources as they offer complementary spatial and temporal coverage.

The consortium used multiple data sources. Annex 1 describes the process adopted for the processing of the raw data to obtain hourly estimates of speed, draught and region of operation, and their merger into a single, combined dataset for use in the bottom-up model. Information in message 18 transmitted from Class B transponders was not used to estimate activity and emissions.

#### 1.2.5. Ship technical data

Ship technical data are required to estimate ship emissions in the bottom-up model. The primary source of technical data used for this study is the IHSF ship registry database. Ship technical data from the IHSF datasets used in this study include Statcode3, Statcode5, gt, dwt, length, beam, max draught, vessel speed, installed main engine power, engine revolutions per minute (RPM), various cargo capacity fields, date of build, keel laid date, propulsion type, number of screws, and main engine fuel consumption and stroke type. In addition to technical data, the IHSF dataset includes a ship status field that indicates whether a ship is active, laid up, being built, etc. The consortium had access to quarterly IHSF datasets from 2007 through to 2012. Each year's specific data were used for the individual annual estimates.

It should be noted that the datasets do not provide complete coverage for all ships and all fields needed. In cases where data are missing, values are estimated either from interpolation

or by referencing another publicly available data source. The details of the approach taken for the missing data and the technical and operational data themselves are discussed further in Section 1.4.3 and Annex 1.

For auxiliary engine operational profiles, neither IHSF nor the other vessel characteristic data services provide auxiliary engine use data, by vessel mode. In the IMO GHG Study 2009, auxiliary loads were estimated by assuming the number and load of auxiliary engines operated by vessel type, and were based on the rated auxiliary engine power gauged from the limited data provided in IHS. To improve this approach, the consortium used Starcrest's Vessel Boarding Program (VBP) data, which had been collected at the Port of Los Angeles, Port of Long Beach (Starcrest 2013), Port Authority of New York & New Jersey, Port of Houston Authority, Port of Seattle and Port of Tacoma. The VBP dataset includes over 1,200 vessels of various classes. For over 15 years Starcrest has collected data onboard vessels specifically related to estimating emissions from ships and validating its models. Auxiliary load (in kW) are recorded for at-berth, at-anchorage, manoeuvring and at-sea vessel modes. The vessel types boarded as part of the VBP include bulk carriers, chemical tankers, cruise ships, oil tankers, general cargo ships, container ships and refrigerated cargo ships.

For container and refrigerated cargo ships, vessel auxiliary engine and boiler loads (kW), by mode, were developed based from the VBP dataset and averages by vessel type and bin size were used. This approach assumes that the vessels boarded are representative of the world fleet for the same classes.

For bulk, chemical tanker, cruise, oil tanker, and general cargo, a hybrid approach was used combining VBP data, data collected from the Finnish Meteorological Institute (FMI) and the IMO GHG Study 2009 approach. The earlier study's approach was based on average auxiliary engine rating (kW); assumption of number of engines running expressed in operational days per year (if greater than 365, it was assumed more than one engine was running); a single load factor for each vessel type; and capacity bins. A hybrid method was used for vessels boarded as part of the VBP but this was not considered to be robust enough to use on its own. VBP data were used to inform and align the estimate of number of engines used, the ratios between various modes and to review the results for reasonableness.

For vessel classes not previously boarded by the VBP, data collected by FMI (from engine manufacturers, classification societies and other sources) were used to determine the ratio between main engines and auxiliary engines. The number of engines assumed to be installed and running was derived from either the IMO GHG Study 2009 or professional judgement. This information was used for the various vessel types and bin sizes to develop vessel-weighted average auxiliary loads in kW. Consistent with the IMO GHG Study 2009's approach, these loads are applied across all operational modes in this study.

Like auxiliary engine loads, there is no commercial data source that provides information about auxiliary boiler loads by operational mode. Auxiliary boiler loads were developed using VBP data and the professional judgement of members of the consortium. Auxiliary boiler loads are typically reported in tons of fuel per day but these rates have been converted to kW (Starcrest 2013). Boilers are used for various purposes on ships and their operational profile can change by mode.

Further details of the approach used to develop auxiliary engine and boiler loads by vessel type and mode can be found in Annex 1.

#### **1.2.6. Sources and alignment/coverage of data sources**

For the bottom-up method, calculations are performed on each individual ship's technical and activity data. For this, the consortium mainly used the IHSF database and AIS data sources and the majority of ships can be identified in each of these for a given year. However, during the method development, the consortium has recognised several ships for which a

corresponding IHSF and activity data match does not occur (e.g. an IMO number is not reported or the MMSI number does not match). Treatment of ships in such categories can be summarised by the diagram presented in Figure 26, and is discussed below so that their contribution to global CO<sub>2</sub> emissions estimates can be better understood.

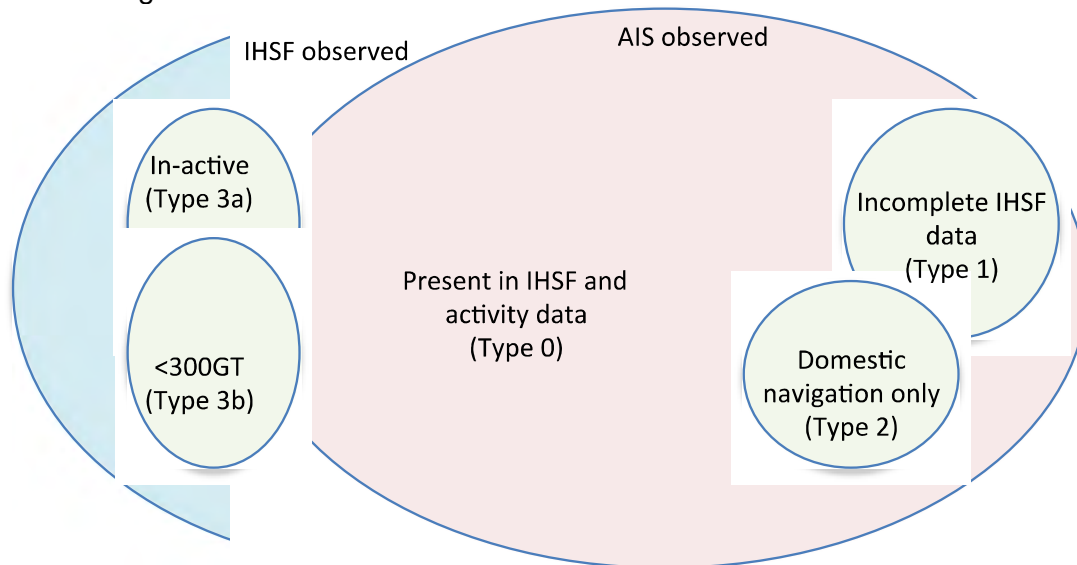


Figure 26 Venn diagram describing the sets of ships observed in the two main data types used in the bottom-up method (IHSF and AIS).

#### Type 1: IMO number is missing but MMSI number appears in both IHSF and activity dataset

The SOLAS convention (chapter V) requires that all ships of >300gt should install a class-A AIS transponder. Furthermore, ships of <300gt are urged to install class-B AIS transponders voluntarily. The consortium recognised the MEPC request to calculate CO<sub>2</sub> emissions from all ships of >100gt, therefore the consortium retrieved both class-A and class-B data for this purpose.

Each AIS transponder has an individual MMSI code. MMSI transponder data from non-ships (e.g. fixed structures, SAR aircraft) were excluded using message ID and the first three digits of the MMSI. Of the remaining ships, for which there is no IMO number reported in the activity data, the match was carried out on MMSI number alone. However, this is not fully reliable because the record of MMSI numbers in the IHSF dataset is imperfect.

#### Type 2: MMSI only appears in the activity dataset

The consortium recognised that some ships only appeared in the activity dataset and did not match any ships registered in the IHSF database. Three reasons can explain this mismatch:

1. erroneous or incomplete records in the IHSF database (e.g. incomplete list of MMSI numbers);
2. ships are operated only for domestic navigation purposes (in which case, the ships will be controlled under each individual administration and do not need to be registered in IHSF);
3. the AIS equipment has reverted back to default 'factory settings' of IMO/MMSI numbers.<sup>3</sup>

In some countries with cabotage, such as the US, Japan and China, some ships may be employed in domestic navigation only and this could be consistent with explanation 2. As the bottom-up method will include both international and domestic fuel consumption and emissions (in order to assist in separating out international fuel consumption and emissions alone), this

<sup>3</sup> See the Maritime and Coastguard Agency note MIN 298 (M+F): 'AIS (Automatic Identification Systems) Operational Notification – Safety of Navigation. ACR/Nauticast AIS'.



category of ships will have to be included in the method, but with high uncertainty because they cannot be given technical characteristics.

### **Type 3: ship appears in IHSF but cannot be identified in the activity dataset**

After the matching process, a number of ships may be identified in the IHSF database with no corresponding activity data. Explanations for this could be:

- a. the ships were not active or had their transponders turned off, e.g. FPSOs, barges, platforms and older ships awaiting scrapping;
- b. the ships may be less than 300gt without any AIS installation.

If the ship was >300gt, it was assumed to be inactive and omitted from the model. If the ship was <300gt, it was assumed that its absence from the AIS data was because it did not have a transponder. In this case the vessel was assigned a typical activity model from similar identifiable ships.

Classifications for each type are summarised in Table 11. Category 0 includes ships that have no identification/matching issues. All of the other five categories require assumptions, which are studied in greater detail in Sections 1.4 and 1.5.

**Table 11 Classification of ships in the bottom-up approach.**

| Type | Identified in activity dataset | Identified in IHSF database | Reason for non-matching   | Target for estimation |
|------|--------------------------------|-----------------------------|---|-----------------------|
| 0    | Yes                            | Yes                         |   | Yes                   |
| 1    | Yes                            | Yes on MMSI number          | Incompletion in data  | Yes                   |
| 2    | Yes                            | No                          | Ships are operated only for domestic navigation, therefore not registered in IHSF | Yes                   |
| 3a   | No                             | Yes                         | The ship is not active  | No                    |
| 3b   | No                             | Yes                         | Ships of <300gt and without any AIS transponder                                   | Yes                   |

### **1.2.7. Bottom-up fuel and emissions estimation**

The bottom-up method combines activity data (derived from AIS and LRIT raw data sources) and technical data (derived from IHSF and a series of empirical data and assumptions derived from the literature).

The model is composed of a main programme that calls up a number of sub-routines (as listed in Annex 1). Each ship has a total of 8,760 unique activity observations per year (8,784 in a leap year) and with approximately 100,000 ships included in a given year's fleet, the run-time of the model is significant on conventional hardware.

The model can only perform calculations for ships for which both activity and IHSF activity data are available. Procedures for estimating the fuel demands and emissions of ships that are not matched are described in greater detail in Annex 1.

### **1.2.8. Classification to international and domestic fuel consumption**

Estimation of bottom-up fuel totals is performed without pre-identifying international versus domestic allocations, because bottom-up methods focus on characteristics of vessel activity, irrespective of ports of departure and arrival. Therefore, top-down allocations according to IEA and IPCC definitions cannot be directly extracted from bottom-up results without route identification. However, some approaches can produce estimates of the fraction of fuels

reported in bottom-up totals that may represent a delineation of international shipping, domestic navigation and fishing. These approaches can be summarised as three allocation methods:

1. apply heuristic from T-D statistics as a ratio of international to total shipping;
2. assign fleet sectors to domestic service and subtract from fleet;
3. combine T-D heuristics and fleet sector information to match the vessel types most likely to serve domestic shipping (bottom-up) with expectations of total fraction likely to use domestic bunkers (top-down).

The IMO GHG Study 2009 used method 3, a combined application of the top-down heuristic and removal of some vessel types. However, the study noted significant uncertainties with this approach. Specifically, it assumed that ship activity was proportional to data on seaborne transport. The study noted that, over the course of a year's activity, a given vessel could be engaged in both international shipping and domestic navigation. 'Since the [IMO GHG Study 2009] activity-based model cannot separate domestic shipping from international shipping, figures from bunker statistics for emissions from domestic shipping [were] used in the calculation of emissions from international shipping' (IMO GHG Study 2009, paragraph 3.17). This study explicitly removed fleet sectors associated with fishing, fixed offshore installations (production vessels) and domestic navigation relying on fuel totals reported in their top-down analysis based on IEA statistics.

The IMO GHG Study 2014 consortium chose not to apply allocation methods 1 or 3 and selected method 2, for several reasons. Method 1 requires a simplistic and arbitrary direct application of the top-down fuel ratios to bottom-up totals. The main disadvantage of method 1 is that it can only be applied to the inventory total; results cannot be tied to bottom-up insights within vessel categories. A related disadvantage is that the assumption may be untestable, preventing direct quality assurance or control and disabling any quantitative consideration of uncertainty.

Allocation method 3 requires subjective judgements to be imposed on the bottom-up data beyond a testable set of assumptions applied to vessel types. For example, the 2009 study imposed additional definitions of ocean-going and coastwise shipping, designating some fleet sectors like cruise ships, service and fishing vessels and smaller Ro-Pax vessels as coastwise. However, that study did not reconcile or discuss whether the fuel totals allocated to coastwise vessels corresponded to an international versus domestic determination within its activity-based method. Moreover, an attempt to determine which shipping was coastwise, as opposed to transiting along a coastal route, was beyond scope of the study.

The IMO GHG Study 2014 applies allocation method 2 with information provided in AIS to support the bottom-up methodology. Based on general voyage behaviour, some ship types are likely to engage in international shipping more often than domestic navigation. These types include transport and larger ferry vessels, as listed in Table 12. This allocation, therefore, also identifies ship types that can be expected to engage mostly in domestic navigation, including non-transport vessels, such as offshore and service vessels, yachts and smaller regional ferry vessels (see Table 13). Results using allocation method 2 allow comparison between bottom-up and top-down allocation of international shipping and domestic navigation. As a caveat, method 2 might overestimate international shipping and could increase uncertainty, which is discussed in Sections 1.4 and 1.5.

Table 12 Summary of vessel types and sizes that can be expected to engage in international shipping.

| Vessel type              | Capacity bin  | Capacity units                       |
|--------------------------|---|--------------------------------------|
| Bulk carrier             | 0-9999<br>10000-34999<br>35000-59999<br>60000-99999<br>100000-199999<br>200000-+                              | deadweight<br>tonnage (dwt)          |
| Chemical tanker          | 0-4999<br>5000-9999<br>10000-19999<br>20000-+   | dwt                                  |
| Container                | 0-999<br>1000-1999<br>2000-2999<br>3000-4999<br>5000-7999<br>8000-11999<br>12000-14500<br>14500-+             | 20-foot<br>equivalent units<br>(TEU) |
| Cruise                   | 0-1999<br>2000-9999<br>10000-59999<br>60000-99999<br>100000-+   | gross tonnes (gt)                    |
| Ferry: Pax only          | 2000-+  | gt                                   |
| Ferry: Ro-Pax            | 2000-+  | gt                                   |
| General cargo            | 0-4999<br>5000-9999<br>10000-+  | dwt                                  |
| Liquefied gas tanker     | 0-49999<br>50000-199999<br>200000-+   | cubic meters<br>(cbm)                |
| Oil tanker               | 0-4999<br>5000-9999<br>10000-19999<br>20000-59999<br>60000-79999<br>80000-119999<br>120000-199999<br>200000-+ | dwt                                  |
| Other liquids<br>tankers | 0-+   | dwt                                  |
| Refrigerated cargo       | 0-1999  | dwt                                  |
| Ro-Ro                    | 0-4999<br>5000-+  | gt                                   |
| Vehicle                  | 0-3999<br>4000-+  | vehicles                             |

Table 13 Summary of vessel types and sizes that can be expected to engage in domestic shipping.

| Vessel type             | Capacity bin | Capacity units |
|-------------------------|--------------|----------------|
| Ferry: Pax only         | 0–1999       | gt             |
| Ferry: Ro-Pax           | 0–1999       | gt             |
| Miscellaneous – fishing | All sizes    | gt             |
| Miscellaneous – other   | All sizes    | gt             |
| Offshore                | All sizes    | gt             |
| Service – other         | All sizes    | gt             |
| Service – tug           | All sizes    | gt             |
| Yacht                   | All sizes    | gt             |

### 1.3. Inventories of CO<sub>2</sub> emissions calculated using both the top-down and bottom-up methods

#### 1.3.1. CO<sub>2</sub> emissions and fuel consumption by ship type

Figure 27 presents the CO<sub>2</sub> emissions by ship type, calculated using the bottom-up method. Equivalent ship type-specific results cannot be presented for the top-down method because the reported marine fuel sales statistics are only available in three categories: international, domestic and fishing.


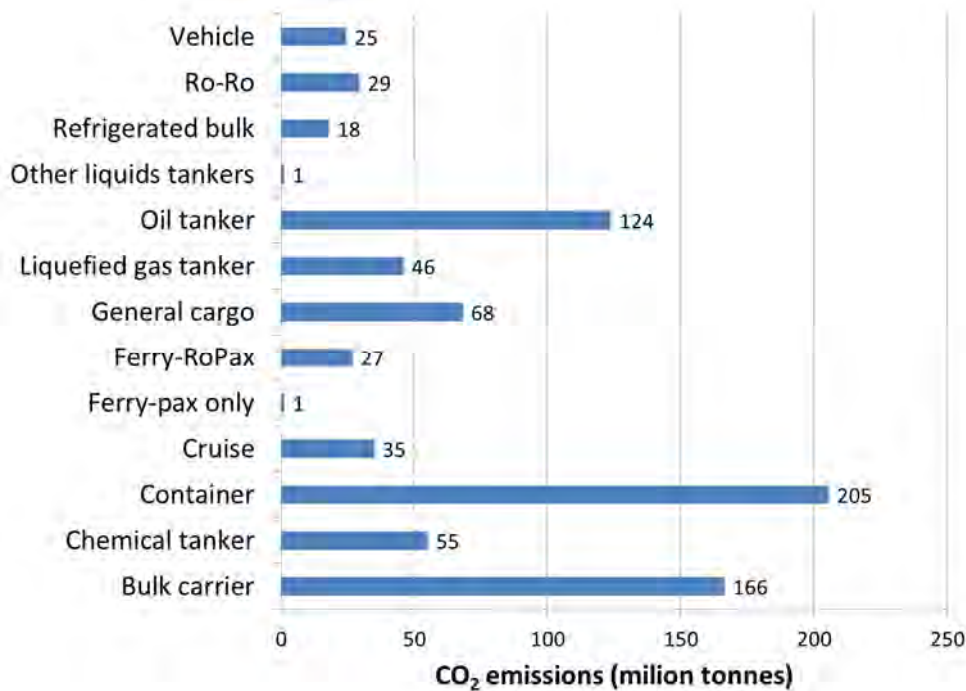


Figure 27 Bottom-up CO<sub>2</sub> emissions from international shipping by ship type (2012).

Figure 28 shows the relative fuel consumption among vessel types in 2012 (both international and domestic shipping), estimated using the bottom-up method. The figure also identifies relative fuel consumption between the main engine (predominantly propulsion), auxiliary engine (electricity generation) and boilers (steam generation). The total shipping fuel consumption is shown to be dominated by three ship types: oil tankers, bulk carriers and container ships. In each of these ship types, the main engine consumes the majority of the fuel. The same plots recreated for earlier years (2007–2011) are included in Annex 2.

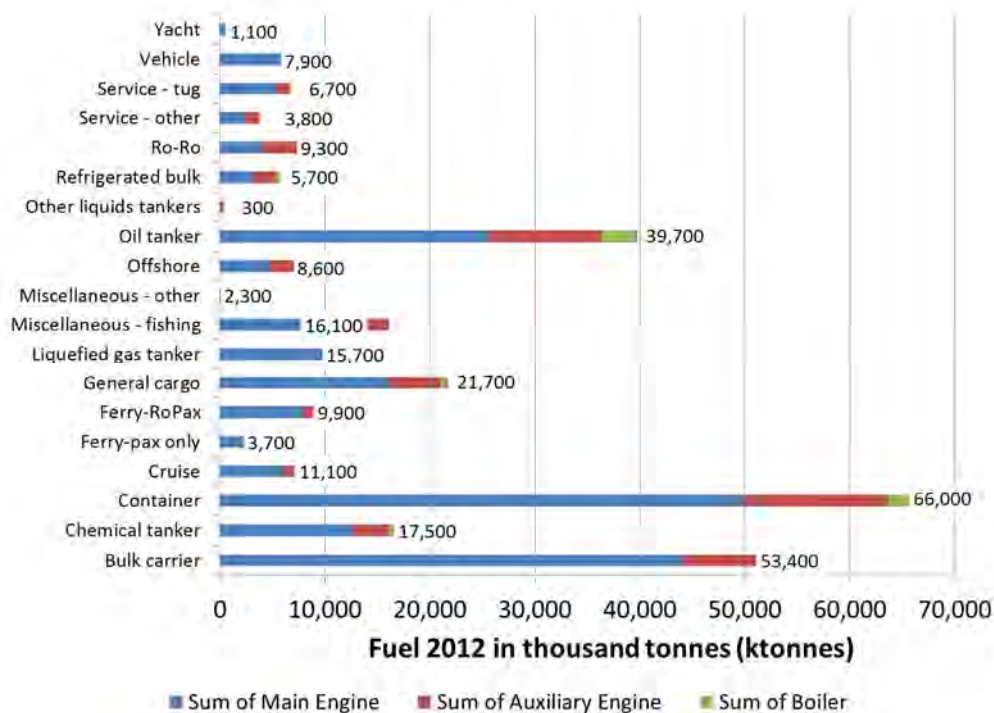

**Figure 28 Summary graph of annual fuel consumption (2012), broken down by ship type and machinery component (main, auxiliary and boiler).**

The detailed results for 2012, broken down by ship type and size category, are presented in Table 14. This table displays the differences between ship types and sizes, for example, differences in installed power, speeds (both design speed and operational speed) and as a result differences in fuel consumption. There are also important differences between the amounts (number of ships) in each of the ship type and size categories. When aggregated to a specific ship type, in sum, these explain the differences observed in Figure 27 and Figure 28, and the differences presented in the last column (Total CO<sub>2</sub> emissions).

The table also displays information about the coverage of the fleet on AIS. The column 'Number active in AIS' lists the number of ships reported as being in-service in the IHSF database for that year. The column 'Number active in AIS' lists the number of ships that are observed in the AIS data at any point in time during the year. In general, the coverage of the in-service fleet on AIS is consistently high (e.g. 95% and above) for the larger ship sizes but less so for some smaller ship size categories (the smallest general cargo carriers in particular). This could be indicative of a number of issues:

- low quality in certain size and type categories of the IHSF database for maintaining information on a ship's status (in-service indication);
- low-quality AIS coverage for the smallest ship types;
- low compliance with SOLAS Chapter V (that ships above a certain size must fit an AIS transponder).

The discussion of quality of coverage is extended in Section 1.4.

Further tables listing the same specifics for the earlier years of the analysis are included in Annex 2.

Table 14 Tabular data for 2012 describing the fleet (international, domestic and fishing) analysed using the bottom-up method.

| Ship type             | Size category | Units | Number active |      | Decimal AIS coverage of in-service ships | Avg. deadweight (tonnes) | Avg. installed power (kW) | Avg. design speed (knots) | Avg. days at sea | Avg.* sea speed (knots) | Avg.* consumption (000 tonnes) |           |        | Total carbon emissions (000 tonnes) |
|-----------------------|---------------|-------|---------------|------|--|--------------------------|---------------------------|---------------------------|------------------|-------------------------|--------------------------------|-----------|--------|-------------------------------------|
|                       |               |       | IHSF          | AIS  |  |                          |                           |                           |                  |                         | main                           | auxiliary | Boiler |                                     |
| Bulk carrier          | 0-9999        | dwt   | 1216          | 670  | 0.55                                     | 3341                     | 1640                      | 11.6                      | 167              | 9.4                     | 0.9                            | 0.5       | 0.1    | 5550                                |
|                       | 10000-34999   | dwt   | 2317          | 2131 | 0.92                                     | 27669                    | 6563                      | 14.8                      | 168              | 11.4                    | 3.0                            | 0.5       | 0.1    | 24243                               |
|                       | 35000-59999   | dwt   | 3065          | 2897 | 0.95                                     | 52222                    | 9022                      | 15.3                      | 173              | 11.8                    | 4.0                            | 0.7       | 0.1    | 44116                               |
|                       | 60000-99999   | dwt   | 2259          | 2145 | 0.95                                     | 81876                    | 10917                     | 15.3                      | 191              | 11.9                    | 5.4                            | 1.1       | 0.3    | 45240                               |
|                       | 100000-199999 | dwt   | 1246          | 1169 | 0.94                                     | 176506                   | 17330                     | 15.3                      | 202              | 11.7                    | 8.5                            | 1.1       | 0.2    | 36340                               |
|                       | 200000+       | dwt   | 294           | 274  | 0.93                                     | 271391                   | 22170                     | 15.7                      | 202              | 12.2                    | 11.0                           | 1.1       | 0.2    | 10815                               |
| Chemical tanker       | 0-4999        | dwt   | 1502          | 893  | 0.59                                     | 2158                     | 1387                      | 11.9                      | 159              | 9.8                     | 0.8                            | 0.5       | 0.6    | 5479                                |
|                       | 5000-9999     | dwt   | 922           | 863  | 0.94                                     | 7497                     | 3292                      | 13.4                      | 169              | 10.6                    | 1.6                            | 0.6       | 0.4    | 7199                                |
|                       | 10000-19999   | dwt   | 1039          | 1004 | 0.97                                     | 15278                    | 5260                      | 14.1                      | 181              | 11.7                    | 3.0                            | 0.6       | 0.4    | 12318                               |
|                       | 20000+        | dwt   | 1472          | 1419 | 0.96                                     | 42605                    | 9297                      | 15.0                      | 183              | 12.3                    | 5.0                            | 1.4       | 0.4    | 30027                               |
| Container             | 0-999         | TEU   | 1126          | 986  | 0.88                                     | 8634                     | 5978                      | 16.5                      | 190              | 12.4                    | 2.8                            | 0.9       | 0.2    | 12966                               |
|                       | 1000-1999     | TEU   | 1306          | 1275 | 0.98                                     | 20436                    | 12578                     | 19.5                      | 200              | 13.9                    | 5.2                            | 2.2       | 0.4    | 31015                               |
|                       | 2000-2999     | TEU   | 715           | 689  | 0.96                                     | 36735                    | 22253                     | 22.2                      | 208              | 15.0                    | 8.0                            | 3.1       | 0.5    | 25084                               |
|                       | 3000-4999     | TEU   | 968           | 923  | 0.95                                     | 54160                    | 36549                     | 24.1                      | 236              | 16.1                    | 13.9                           | 3.9       | 0.6    | 53737                               |
|                       | 5000-7999     | TEU   | 575           | 552  | 0.96                                     | 75036                    | 54838                     | 25.1                      | 246              | 16.3                    | 19.5                           | 4.1       | 0.6    | 42960                               |
|                       | 8000-11999    | TEU   | 331           | 325  | 0.98                                     | 108650                   | 67676                     | 25.5                      | 256              | 16.3                    | 24.4                           | 4.5       | 0.7    | 30052                               |
|                       | 12000-14500   | TEU   | 103           | 98   | 0.95                                     | 176783                   | 83609                     | 28.9                      | 241              | 16.1                    | 23.7                           | 4.9       | 0.8    | 8775                                |
|                       | 14500+        | TEU   | 8             | 7    | 0.88                                     | 158038                   | 80697                     | 25.0                      | 251              | 14.8                    | 25.3                           | 6.1       | 1.1    | 806                                 |
| General cargo         | 0-4999        | dwt   | 11620         | 5163 | 0.44                                     | 1925                     | 1119                      | 11.6                      | 161              | 8.7                     | 0.5                            | 0.1       | 0.0    | 23606                               |
|                       | 5000-9999     | dwt   | 2894          | 2491 | 0.86                                     | 7339                     | 3320                      | 13.6                      | 166              | 10.1                    | 1.4                            | 0.4       | 0.1    | 16949                               |
|                       | 10000+        | dwt   | 1972          | 1779 | 0.90                                     | 22472                    | 7418                      | 15.8                      | 174              | 12.0                    | 3.4                            | 1.2       | 0.1    | 27601                               |
| Liquefied gas tanker  | 0-49999       | cbm   | 1104          | 923  | 0.84                                     | 6676                     | 3815                      | 14.2                      | 180              | 11.9                    | 2.4                            | 0.6       | 0.4    | 11271                               |
|                       | 50000-199999  | cbm   | 463           | 444  | 0.96                                     | 68463                    | 22600                     | 18.5                      | 254              | 14.9                    | 17.9                           | 4.1       | 0.6    | 29283                               |
|                       | 200000+       | cbm   | 45            | 43   | 0.96                                     | 121285                   | 37358                     | 19.3                      | 277              | 16.9                    | 33.5                           | 4.0       | 1.0    | 5406                                |
| Oil tanker            | 0-4999        | dwt   | 3500          | 1498 | 0.43                                     | 1985                     | 1274                      | 11.5                      | 144              | 8.7                     | 0.6                            | 0.6       | 0.2    | 14991                               |
|                       | 5000-9999     | dwt   | 664           | 577  | 0.87                                     | 6777                     | 2846                      | 12.6                      | 147              | 9.1                     | 1.1                            | 1.0       | 0.3    | 4630                                |
|                       | 10000-19999   | dwt   | 190           | 171  | 0.90                                     | 15129                    | 4631                      | 13.4                      | 149              | 9.6                     | 1.6                            | 1.7       | 0.4    | 2121                                |
|                       | 20000-59999   | dwt   | 659           | 624  | 0.95                                     | 43763                    | 8625                      | 14.8                      | 164              | 11.7                    | 3.7                            | 2.0       | 0.6    | 12627                               |
|                       | 60000-79999   | dwt   | 391           | 381  | 0.97                                     | 72901                    | 12102                     | 15.1                      | 183              | 12.2                    | 5.8                            | 1.9       | 0.6    | 9950                                |
|                       | 80000-119999  | dwt   | 917           | 890  | 0.97                                     | 109259                   | 13813                     | 15.3                      | 186              | 11.6                    | 5.9                            | 2.6       | 0.8    | 25769                               |
|                       | 120000-199999 | dwt   | 473           | 447  | 0.95                                     | 162348                   | 18796                     | 16.0                      | 206              | 11.7                    | 8.0                            | 3.1       | 1.0    | 17230                               |
|                       | 200000+       | dwt   | 601           | 577  | 0.96                                     | 313396                   | 27685                     | 16.0                      | 233              | 12.5                    | 15.3                           | 3.6       | 1.1    | 36296                               |
| Other liquids tankers | 0+            | dwt   | 149           | 39   | 0.26                                     | 670                      | 558                       | 9.8                       | 116              | 8.3                     | 0.3                            | 1.3       | 0.5    | 5550                                |

| Ship type               | Size category | Units   | Number active |      | Decimal AIS Coverage of in-service ships | Avg. deadweight (tonnes) | Avg. installed power (kW) | Avg. design speed (knots) | Avg. days at sea | Avg.* sea speed (knots) | Avg.* consumption ('000 tonnes) |           |        | Total carbon emissions ('000 tonnes) |
|-------------------------|---------------|---------|---------------|------|--|--------------------------|---------------------------|---------------------------|------------------|-------------------------|---------------------------------|-----------|--------|--------------------------------------|
|                         |               |         | IHSF          | AIS  |  |                          |                           |                           |                  |                         | main                            | auxiliary | Boiler |                                      |
| Ferry-pax only          | 0-1999        | GT      | 3081          | 1145 | 0.37                                     | 135                      | 1885                      | 22.7                      | 182              | 13.9                    | 0.8                             | 0.4       | 0.0    | 10968                                |
|                         | 2000+         | GT      | 71            | 52   | 0.73                                     | 1681                     | 6594                      | 16.6                      | 215              | 12.8                    | 3.9                             | 1.0       | 0.0    | 1074                                 |
| Cruise                  | 0-1999        | GT      | 198           | 75   | 0.38                                     | 137                      | 914                       | 12.4                      | 102              | 8.8                     | 0.3                             | 1.0       | 0.5    | 1105                                 |
|                         | 2000-9999     | GT      | 69            | 53   | 0.77                                     | 1192                     | 4552                      | 16.0                      | 161              | 9.9                     | 1.3                             | 1.1       | 0.4    | 580                                  |
|                         | 10000-59999   | GT      | 115           | 108  | 0.94                                     | 4408                     | 19657                     | 19.9                      | 217              | 13.8                    | 9.1                             | 9.2       | 1.4    | 6929                                 |
|                         | 60000-99999   | GT      | 87            | 85   | 0.98                                     | 8425                     | 53293                     | 22.2                      | 267              | 15.7                    | 30.8                            | 26.2      | 0.6    | 15415                                |
|                         | 100000+       | GT      | 51            | 51   | 1.00                                     | 11711                    | 76117                     | 22.7                      | 261              | 16.4                    | 47.2                            | 25.5      | 0.5    | 10906                                |
| Ferry-RoPax             | 0-1999        | GT      | 1669          | 732  | 0.44                                     | 401                      | 1508                      | 13.0                      | 184              | 8.4                     | 0.6                             | 0.2       | 0.0    | 4308                                 |
|                         | 2000+         | GT      | 1198          | 1046 | 0.87                                     | 3221                     | 15491                     | 21.6                      | 198              | 13.9                    | 6.0                             | 1.4       | 0.0    | 26753                                |
| Refrigerated bulk       | 0-1999        | dwt     | 1090          | 763  | 0.70                                     | 5695                     | 5029                      | 16.8                      | 173              | 13.4                    | 3.0                             | 2.3       | 0.4    | 17945                                |
| Ro-Ro                   | 0-4999        | dwt     | 1330          | 513  | 0.39                                     | 1031                     | 1482                      | 10.7                      | 146              | 8.8                     | 1.1                             | 2.5       | 0.3    | 15948                                |
|                         | 5000+         | dwt     | 415           | 396  | 0.95                                     | 11576                    | 12602                     | 18.6                      | 209              | 14.2                    | 6.8                             | 3.6       | 0.4    | 13446                                |
| Vehicle                 | 0-3999        | vehicle | 279           | 261  | 0.94                                     | 9052                     | 9084                      | 18.3                      | 222              | 14.2                    | 5.4                             | 1.6       | 0.3    | 6200                                 |
|                         | 4000+         | vehicle | 558           | 515  | 0.92                                     | 19721                    | 14216                     | 20.1                      | 269              | 15.5                    | 9.0                             | 1.4       | 0.2    | 18302                                |
| Yacht                   | 0+            | GT      | 1750          | 1110 | 0.63                                     | 171                      | 2846                      | 16.5                      | 66               | 10.7                    | 0.4                             | 0.5       | 0.0    | 3482                                 |
| Service tug             | 0+            | GT      | 14641         | 5043 | 0.34                                     | 119                      | 2313                      | 11.8                      | 100              | 6.7                     | 0.4                             | 0.1       | 0.0    | 21301                                |
| Miscellaneous - fishing | 0+            | GT      | 22130         | 4510 | 0.20                                     | 181                      | 956                       | 11.5                      | 164              | 7.4                     | 0.4                             | 0.4       | 0.0    | 50959                                |
| Offshore                | 0+            | GT      | 6480          | 5082 | 0.78                                     | 1716                     | 4711                      | 13.8                      | 106              | 8.0                     | 0.7                             | 0.6       | 0.0    | 27397                                |
| Service - other         | 0+            | GT      | 3423          | 2816 | 0.82                                     | 2319                     | 3177                      | 12.8                      | 116              | 7.9                     | 0.7                             | 0.4       | 0.0    | 11988                                |
| Miscellaneous - other   | 0+            | GT      | 3008          | 64   | 0.02                                     | 59                       | 2003                      | 12.7                      | 117              | 7.3                     | 0.4                             | 0.4       | 0.0    | 7425                                 |

\* indicates the use of weighted averaging (weighted by days at sea for each individual ship).

Note: slight differences in Table 14 and Table 16 totals are due to rounding in values reported in the report. For 2012 the difference is approximately 0.1%.

### 1.3.2. CO<sub>2</sub> and fuel consumption for multiple years 2007–2012

Figure 29 shows the year-on-year trends for the total CO<sub>2</sub> emissions of each ship type, as estimated using the bottom-up method. Figure 30 and Figure 31 show the associated total fuel consumption estimates for all years of the study, from both the top-down and bottom-up methods. The total CO<sub>2</sub> emissions aggregated to the lowest level of detail in the top-down analysis (international, domestic and fishing) are presented in Table 15 and 16.

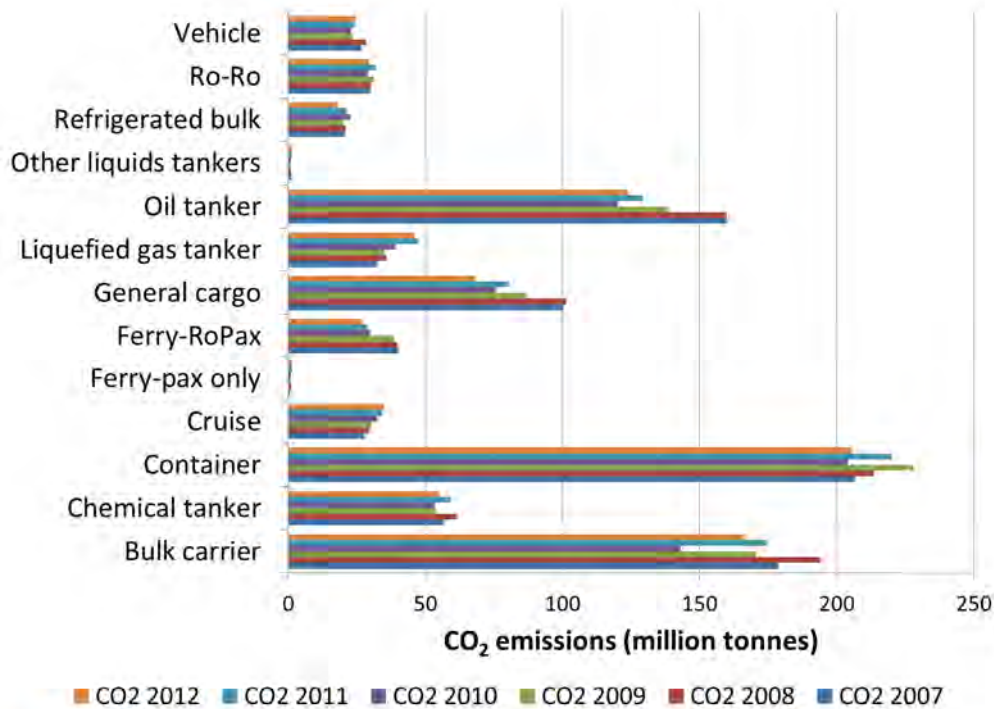


Figure 29 CO<sub>2</sub> emissions by ship type (international shipping only), calculated from the bottom-up method for all years 2007–2012.

Table 15 International, domestic and fishing CO<sub>2</sub> emissions 2007–2011, using the top-down method.

| Marine sector                | Fuel type | 2007         | 2008         | 2009         | 2010         | 2011         |
|------------------------------|-----------|--------------|--------------|--------------|--------------|--------------|
| International shipping       | HFO       | 542.1        | 551.2        | 516.6        | 557.1        | 554.0        |
|                              | MDO       | 83.4         | 72.8         | 79.8         | 90.4         | 94.9         |
|                              | NG        | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
| Top-down international total | All       | 625.5        | 624.0        | 596.4        | 647.5        | 648.9        |
| Domestic navigation          | HFO       | 62.0         | 44.2         | 47.6         | 44.5         | 39.5         |
|                              | MDO       | 72.8         | 76.6         | 75.7         | 82.4         | 87.8         |
|                              | NG        | 0.1          | 0.1          | 0.1          | 0.1          | 0.2          |
| Top-down domestic total      | All       | 134.9        | 121.0        | 123.4        | 127.1        | 127.6        |
| Fishing                      | HFO       | 3.4          | 3.4          | 3.1          | 2.5          | 2.5          |
|                              | MDO       | 17.3         | 15.7         | 16.0         | 16.7         | 16.4         |
|                              | NG        | 0.1          | 0.1          | 0.1          | 0.1          | 0.1          |
| Top-down fishing total       | All       | 20.8         | 19.2         | 19.3         | 19.2         | 19.0         |
| <b>All fuels top-down</b>    |           | <b>781.2</b> | <b>764.1</b> | <b>739.1</b> | <b>793.8</b> | <b>795.4</b> |



Table 16 International, domestic and fishing CO<sub>2</sub> emissions 2007–2012, using the bottom-up method.

| Marine sector                 | Fuel type | 2007    | 2008    | 2009  | 2010  | 2011    | 2012  |
|-------------------------------|-----------|---------|---------|-------|-------|---------|-------|
| International shipping        | HFO       | 773.8   | 802.7   | 736.6 | 650.6 | 716.9   | 667.9 |
|                               | MDO       | 97.2    | 102.9   | 104.2 | 102.2 | 109.8   | 105.2 |
|                               | NG        | 13.9    | 15.4    | 14.2  | 18.6  | 22.8    | 22.6  |
| Bottom-up international total | All       | 884.9   | 920.9   | 855.1 | 771.4 | 849.5   | 795.7 |
| Domestic navigation           | HFO       | 53.8    | 57.4    | 32.5  | 45.1  | 61.7    | 39.9  |
|                               | MDO       | 142.7   | 138.8   | 80.1  | 88.2  | 98.1    | 91.6  |
|                               | NG        | 0       | 0       | 0     | 0     | 0       | 0     |
| Bottom-up domestic total      | All       | 196.5   | 196.2   | 112.6 | 133.3 | 159.7   | 131.4 |
| Fishing                       | HFO       | 1.6     | 1.5     | 0.9   | 0.8   | 1.4     | 1.1   |
|                               | MDO       | 17.0    | 16.4    | 9.3   | 9.2   | 10.9    | 9.9   |
|                               | NG        | 0       | 0       | 0     | 0     | 0       | 0     |
| Bottom-up fishing total       | All       | 18.6    | 18.0    | 10.2  | 10.0  | 12.3    | 11.0  |
| <b>All fuels bottom-up</b>    |           | 1,100.1 | 1,135.1 | 977.9 | 914.7 | 1,021.6 | 938.1 |

Total fuel consumption estimates for 2007–2012 using the bottom-up method are presented in Figure 30 for all ships and in Figure 31 for international shipping. These results are presented alongside the multi-year top-down fuel consumption results presented in Section 1.1.3. Section 1.4.4 discusses the differences between fuel consumption and emissions estimates from these methods.


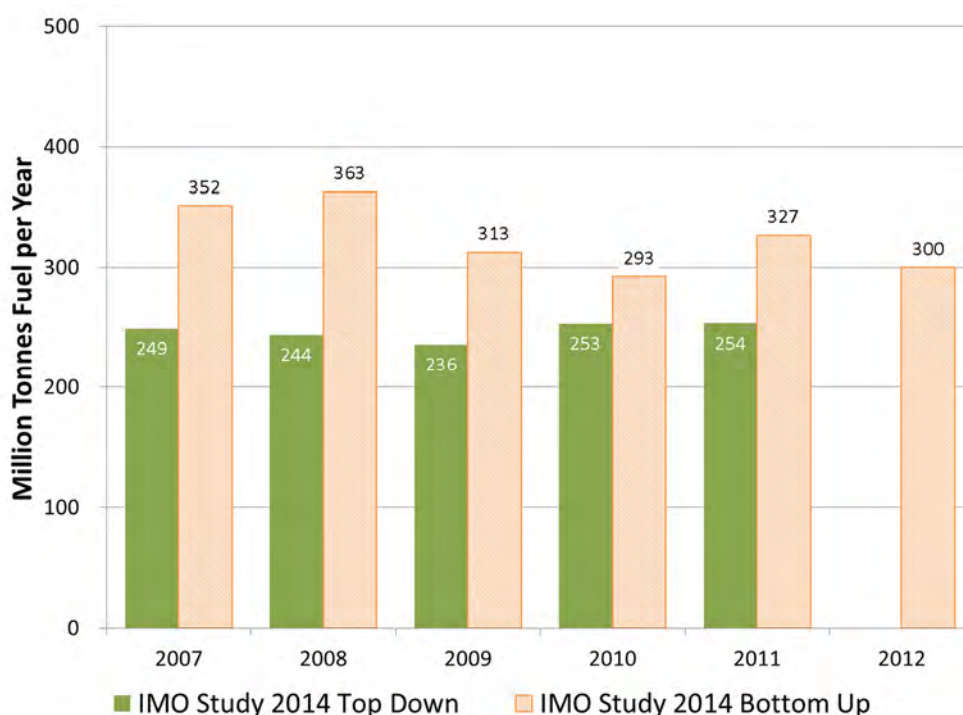


Figure 30 Summary graph of annual fuel use by all ships, estimated using the top-down and bottom-up methods.

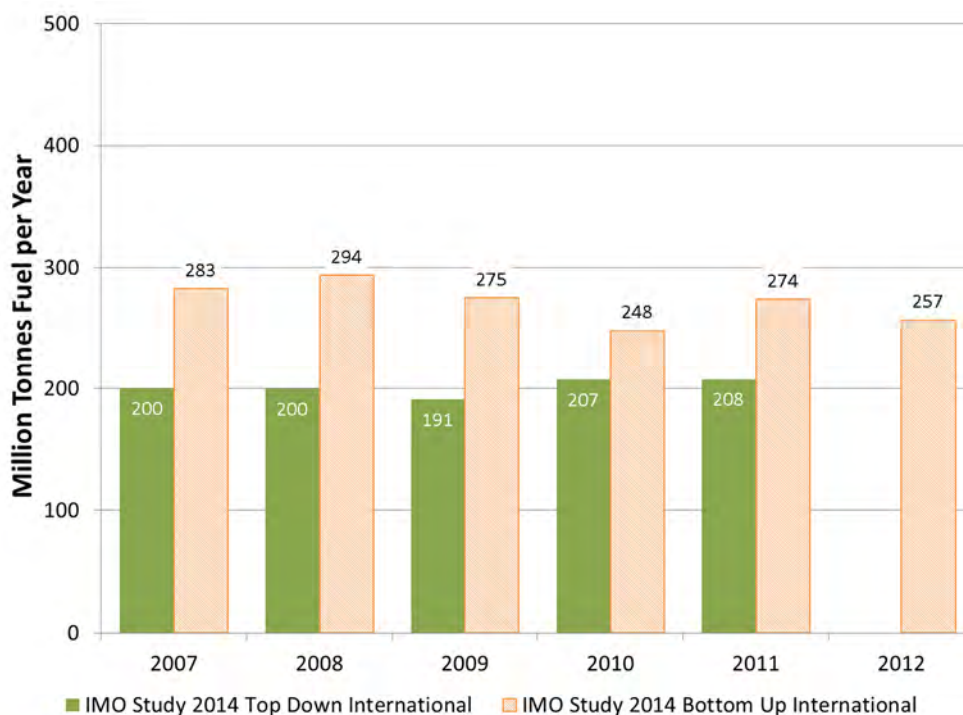

**Figure 31 Summary graph of annual fuel use by international shipping, estimated using the top-down and bottom-up methods.**

Particular care must be taken when interpreting the domestic fuel consumption and emissions estimates from both the top-down and the bottom-up methods. Depending on where domestic shipping and fishing buys its fuel, it may or may not be adequately captured in the IEA marine bunkers. For example, inland or leisure and fishing vessels may purchase fuel at locations that also sell fuel to other sectors of the economy and therefore be misallocated. In the bottom-up method, fuel consumption is only included for ships that appear in the IHSF database (and have an IMO number). While this should cover all international shipping, many domestic vessels (inland, fishing or cabotage) may not be included in this database. An indication of the number of vessels excluded from the bottom-up method was obtained from the count of MMSI numbers observed on AIS but for which no match to the IHSF database was obtained. The implications of this count for both the bottom-up and top-down analysis are discussed in Section 1.4.

### 1.3.3. Trends in emissions and drivers of emissions 2007–2012

Figure 32–Figure 37 present indexed time-series of the total CO<sub>2</sub> emissions for three ship types – oil tankers, container ships and bulk carriers – during the period studied. The figures also present a number of key drivers of CO<sub>2</sub> emissions, estimated in the bottom-up method that can be used to decompose CO<sub>2</sub> emissions trends:

- the total CO<sub>2</sub> emissions are a function of the total number of ships and average annual fuel consumption;
- the average annual fuel consumption is primarily a function of days at sea and the extent of adoption of slow steaming;
- all trends are indexed to their values in 2007.

These drivers of average annual fuel consumption can also be influenced by changes in the average specification of the fleet (average capacity, average installed power, etc.). These are of less significance than the key trends of speed and days at sea.

The contrast between the three plots shows that these three sectors of the shipping industry have changed in different ways over the period 2007–2012. The oil tanker sector reduced its emissions by a total of 20%. During the same period the dry bulk and container ship sectors also saw absolute emissions reductions but by smaller amounts. All ship types experienced similar reductions in average annual fuel consumption, but the difference in fleet total CO<sub>2</sub> emissions is explained by the combination of these reductions with differences in the number of ships in service. The reduction in average days at sea during the period studied is greatest in the dry bulk fleet, whereas the container ship fleet has seen a slight increase. Consistent with the results presented in Table 17, more container ships adopted slow steaming operations. In other words, similar reductions in average fuel consumption per ship over the study period were achieved through different combinations of speed and days at sea.

The analysis of trends in speed and days at sea are consistent with the findings from Section 3 that the global fleet is currently at or near the historic low in terms of productivity (transport work per unit of capacity). (See Section 3.2.4 and related text and Annex 7, Figures 38–40 for further details.) The consequence is that these (and many other) sectors of the shipping industry represent latent emissions increases, because the fundamentals (number of ships in service, fleet total installed power and demand tonne miles) have seen upward trends. These upward trends have been controlled because economic pressures (excess supply of fleet as demonstrated by the relative supply and demand growth in each plot), together with high fuel prices, have acted to reduce productivity (reducing both average operating speeds and days spent at sea in both the oil tanker and bulker fleets, and only operating speeds in the container fleets). These two components of productivity are both liable to change if the supply and demand differential returns to historical long-run trends. Therefore, whether and when the latent emissions may appear is uncertain, as this depends on the future market dynamics of the industry. However, the risk is high that fleet ‘potential to emit’ (e.g., fleet-average installed power and design speeds) could encounter conditions favouring the conversion of latent emissions to actual emissions; this could mean that shipping reverts to the trajectory estimated in the IMO GHG Study 2009. The potential for latent emissions to be realised is quantified in the sensitivity analysis in Section 3.3.4 (see Figure 88 and related text).



Figure 32 Average trends in the tanker sector 2007–2012, indexed to 2007.

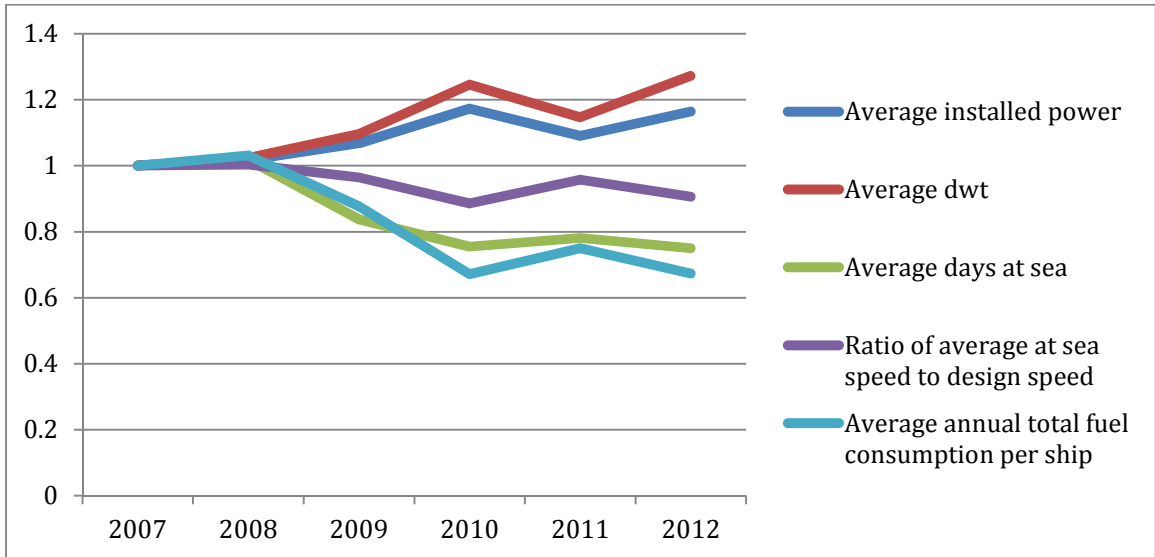


Figure 33 Average trends in the bulk carrier sector 2007–2012, indexed to 2007.

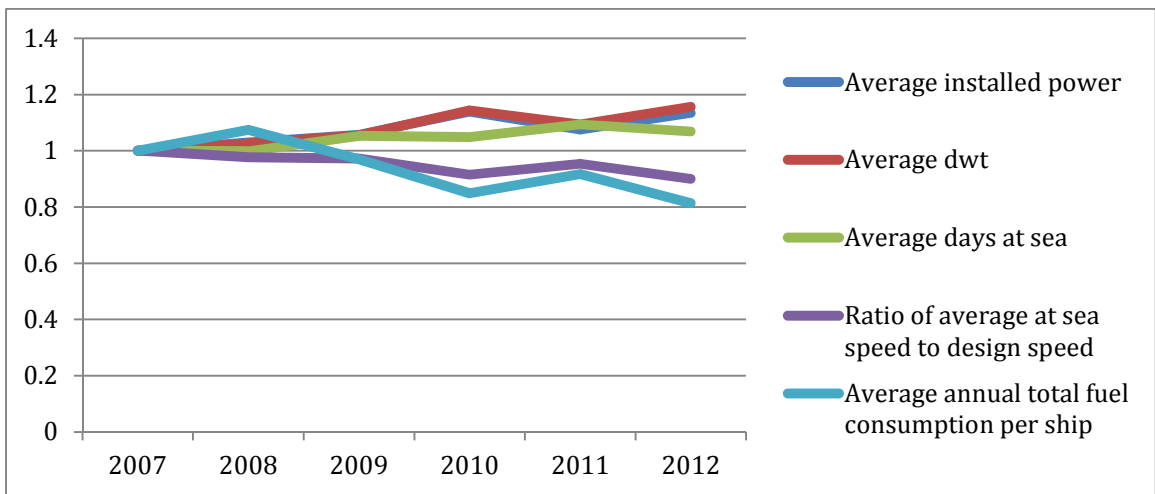


Figure 34 Average trends in the container sector 2007–2012, indexed to 2007.

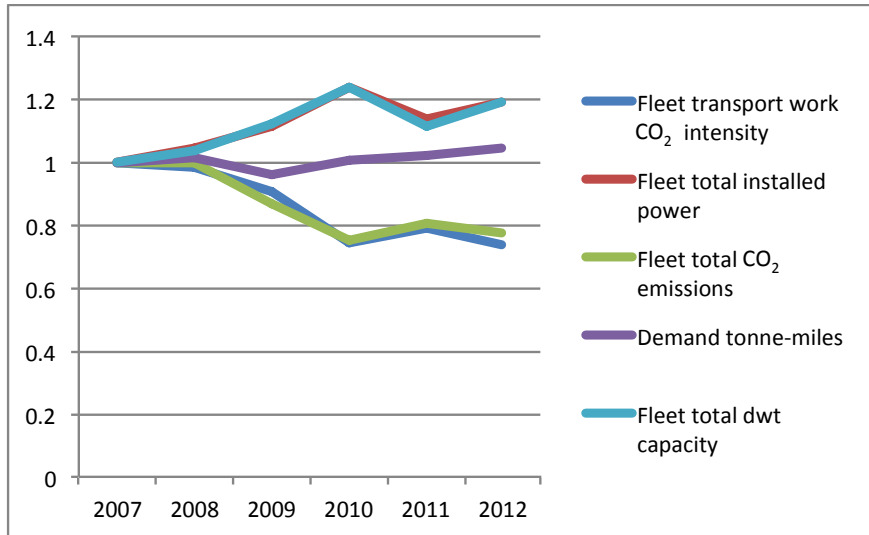


Figure 35 Fleet total trends in the oil tanker sector (2007–2012), indexed to 2007.

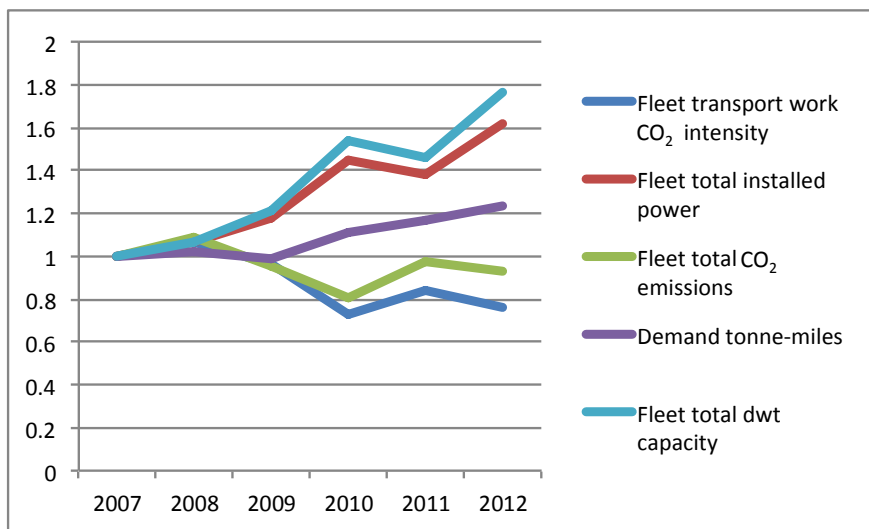


Figure 36 Fleet total trends in the bulk carrier sector (2007–2012), indexed to 2007.

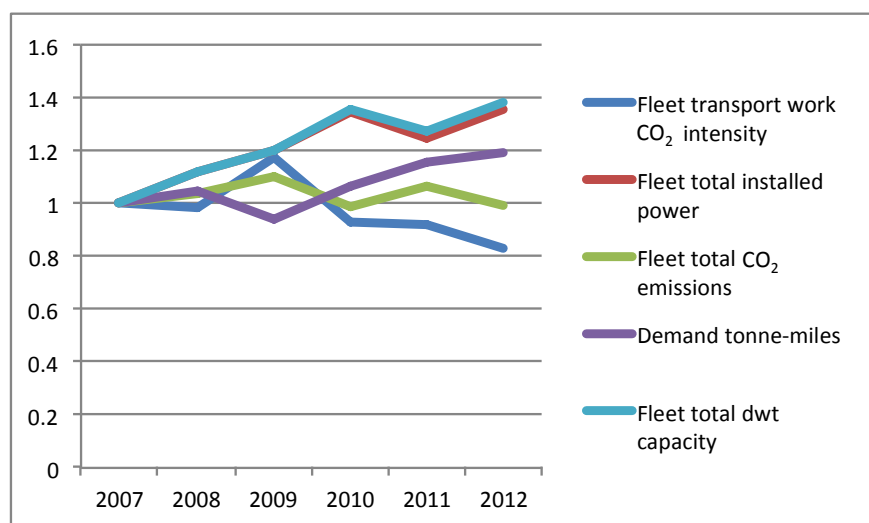


Figure 37 Fleet total trends in the container ship sector (2007–2012), indexed to 2007.

### 1.3.4. Variability between ships of a similar type and size and the impact of slow steaming

The bottom-up method calculates ship-type totals by summing the calculations for each individual ship identified as in-service in the IHSF database. This study therefore supersedes the IMO GHG Study 2009 in providing insight into individual ships within fleets of similar ships. To illustrate this, Figure 38–Figure 40 display the statistics for the bulk carrier, container ship and tanker fleets. The plots represent each ship type’s population by ship size category (on the x-axis). The box plots convey the average ship (red line in the middle of the box), the interquartile range (between the 25th and 75th percentile of the population) and the 2nd to 98th percentile range (the extremes of the ‘whiskers’). Tabular data characterising each ship type and size category studied are included in Annex 2.

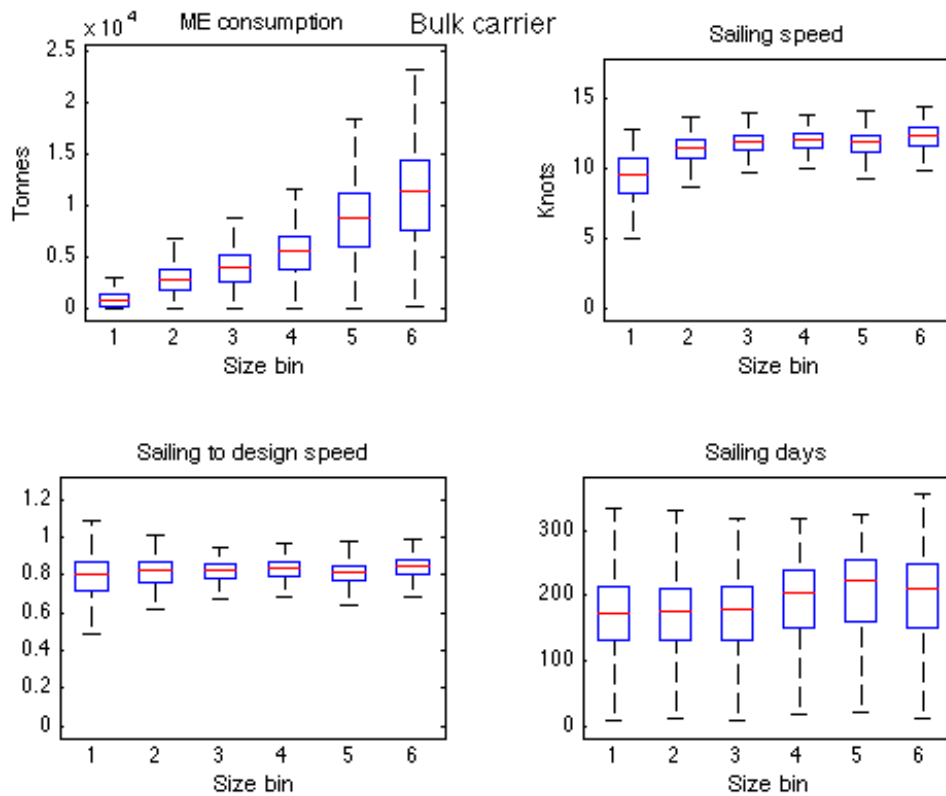


Figure 38 Variability within ship size categories in the bulk ship fleet (2012). Size category 1 is the smallest bulk carrier (0–9999dwt) and size category 6 is largest (200,000+dwt).

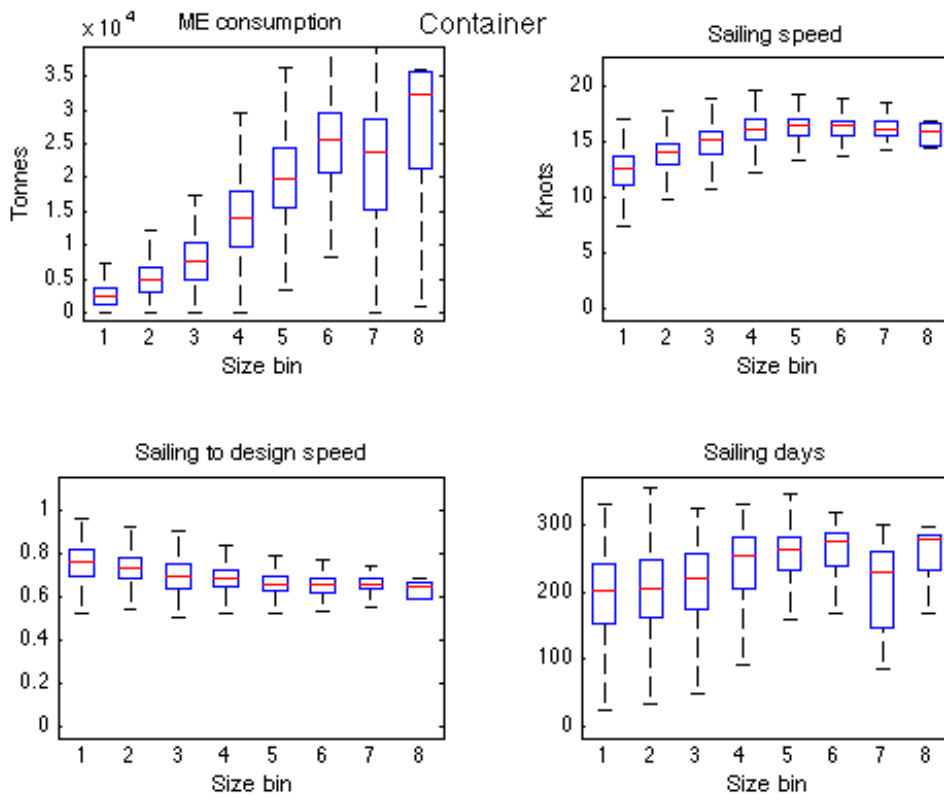


Figure 39 Variability within ship size categories in the container ship fleet (2012). Size category 1 is the smallest containerships (0–999 TEU) and size category 8 is the largest (14,500+ TEU).

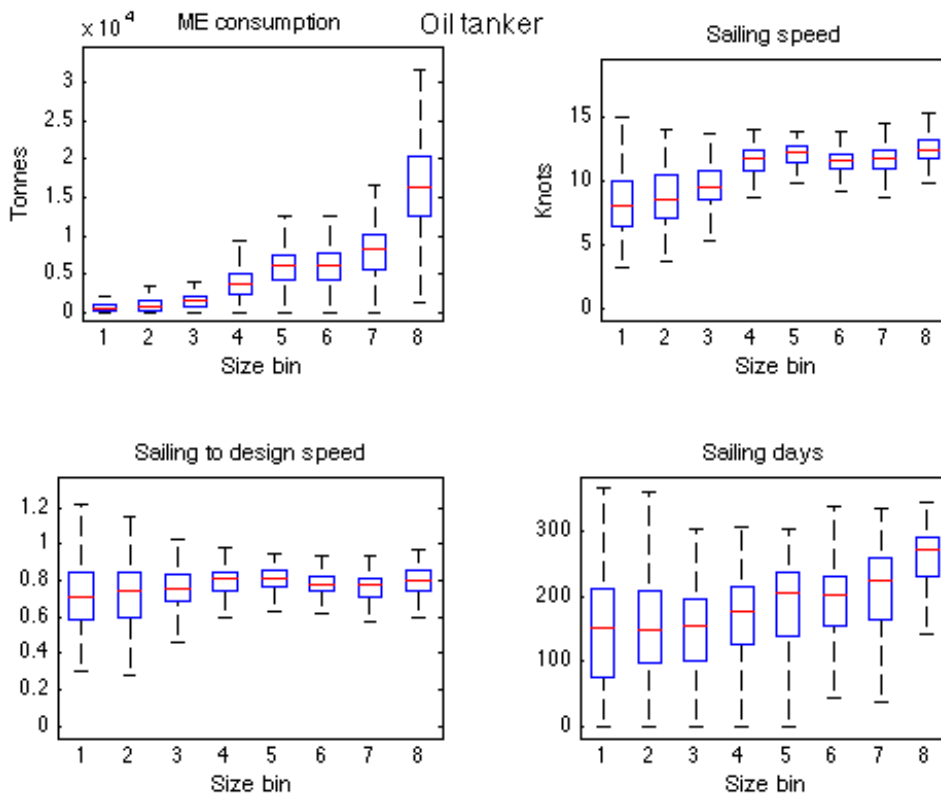


Figure 40 Variability within ship size categories in the tanker fleet (2012). Size category 1 is the smallest oil tankers (0–9999dwt capacity) and size category 8 is the largest (200,000+dwt capacity).

The average sailing speed in 2012 of container ships in size categories 4–7 (3000 TEU to 14,500 TEU capacity) is between 16 and 16.3 knots (Figure 39). The interquartile range of sailing speed is approximately 1–2 knots, depending on the size. This shows little variability in operating speed across the sector (nearly 2000 ships). The average speed of ships in those four size categories varies between 24 and 29 knots. Therefore the sailing speed plot also shows the extent to which ships are slow steaming in 2012. The ratio of operating speed to design speed (here approximated as the IHSF reference speed) can be seen in the bottom left-hand plot (Figure 39), showing that larger ships (bin 8 in Figure 39) are on average operating at between 55% and 65% of their design speed. Although they have lower design speeds than the larger ships, in ratio terms, the smaller container ships (sizes 1 and 2) are slow steaming less than the larger ships.

The top left of the plots portrays the estimated total annual main engine fuel consumption. In this instance there is a comparatively higher variability within the population than observed for sailing speed. Some of this is due to the variability in ship technical specifications (hull form, installed power and design speed). There is also variability in the total fuel consumption because of variability in the number of sailing days in a year (bottom right-hand plot). Holding all else equal, an increase in days at sea will increase total annual main engine fuel consumption by the same percentage.

The results for oil tankers show a similar level of variability within a given ship size group, a significant (although not as significant as container ships) uptake of slow steaming and similarities between the larger ship types in terms of sailing speeds and days spent at sea.

The bottom-up method also allows the influence of slow steaming to be quantified. Across all ship types and sizes, the average ratio of operating speed to design speed was 0.85 in 2007 and was 0.75 in 2012. This shows that, in relative terms, ships have slowed down – the widely reported phenomenon of slow steaming that has occurred since the financial crisis. The consequence of this observed slow steaming is a reduction in daily fuel of approximately 27% expressed as an average across all ship types and sizes. However, that average value belies the significant operational changes that have occurred in certain ship type and size categories. Table 4 describes, for three of the ship types studied, the ratio between slow steaming percentage (average at-sea operating speed expressed as a percentage of design speed); the average at-sea main engine load factor (a percentage of the total installed power produced by the main engine); and average at-sea main engine daily fuel consumption. Many of the larger ship sizes in all three ship type categories are estimated to have experienced reductions in daily fuel consumption well in excess of the average value of 25%.

The ships with the highest design speeds have adopted the greatest levels of slow steaming (e.g., container ships are operating at average speeds much lower than their design speeds); there is also widespread adoption of significant levels of slow steaming in many of the oil tanker size categories. Concurrent with the observed trend, technical specifications changed for ships. The largest bulk carriers (200,000+dwt capacity) saw increases in average size (dwt capacity), as well as increased installed power (from an average of 18.9 MW to 22.2MW), as a result of a large number of new ships entering the fleet over the time period (the fleet grew from 102 ships in 2007 to 294 ships in 2012).

A reduction in speed and the associated reduction in fuel consumption do not relate to an equivalent percentage increase in efficiency, because a greater number of ships



(or more days at sea) are required to do the same amount of transport work. This relationship is discussed in greater detail in Section 3.

Table 17 Relationship between slow steaming, engine load factor (power output) and fuel consumption for 2007 and 2012.

| Ship type    | Size category | Units | 2007  |  |                                      | 2012  |  |                                      | % change in average at sea tonnes per day (tpd), 2007-2012 |
|--------------|---------------|-------|---|--|--------------------------------------|---|--|--------------------------------------|--|
|              |               |       | Ratio of average at sea speed to design speed | Average at sea main engine load factor (% MCR) | At sea consumption in tonnes per day | Ratio of average at sea speed to design speed | Average at sea main engine load factor (% MCR) | At sea consumption in tonnes per day |  |
| Bulk carrier | 0-9999        | dwt   | 0.92  | 92%  | 7.0                                  | 0.84  | 70%  | 5.5                                  | -24%   |
|              | 10000-34999   |       | 0.86  | 68%  | 22.2                                 | 0.82  | 59%  | 17.6                                 | -23%   |
|              | 35000-59999   |       | 0.88  | 73%  | 29.0                                 | 0.82  | 58%  | 23.4                                 | -21%   |
|              | 60000-99999   |       | 0.90  | 78%  | 37.7                                 | 0.83  | 60%  | 28.8                                 | -27%   |
|              | 100000-199999 |       | 0.89  | 77%  | 55.5                                 | 0.81  | 57%  | 42.3                                 | -27%   |
|              | 200000+       |       | 0.82  | 66%  | 51.2                                 | 0.84  | 62%  | 56.3                                 | 10%  |
| Container    | 0-999         | TEU   | 0.82  | 62%  | 17.5                                 | 0.77  | 52%  | 14.4                                 | -19%   |
|              | 1000-1999     |       | 0.80  | 58%  | 33.8                                 | 0.73  | 45%  | 26.0                                 | -26%   |
|              | 2000-2999     |       | 0.80  | 58%  | 55.9                                 | 0.70  | 39%  | 38.5                                 | -37%   |
|              | 3000-4999     |       | 0.80  | 59%  | 90.4                                 | 0.68  | 36%  | 58.7                                 | -42%   |
|              | 5000-7999     |       | 0.82  | 63%  | 151.7                                | 0.65  | 32%  | 79.3                                 | -63%   |
|              | 8000-11999    |       | 0.85  | 69%  | 200.0                                | 0.65  | 32%  | 95.6                                 | -71%   |
|              | 12000-14500   |       | 0.84  | 67%  | 231.7                                | 0.66  | 34%  | 107.8                                | -73%   |
|              | 14500+        |       | -   | -  | -                                    | 0.60  | 28%  | 100.0                                | -  |
| Oil tanker   | 0-4999        | dwt   | 0.89  | 85%  | 5.1                                  | 0.80  | 67%  | 4.3                                  | -18%   |
|              | 5000-9999     |       | 0.83  | 64%  | 9.2                                  | 0.75  | 49%  | 7.1                                  | -26%   |
|              | 10000-19999   |       | 0.81  | 61%  | 15.3                                 | 0.76  | 49%  | 10.8                                 | -34%   |
|              | 20000-59999   |       | 0.87  | 72%  | 28.8                                 | 0.80  | 55%  | 22.2                                 | -26%   |
|              | 60000-79999   |       | 0.91  | 83%  | 45.0                                 | 0.81  | 57%  | 31.4                                 | -35%   |
|              | 80000-119999  |       | 0.91  | 81%  | 49.2                                 | 0.78  | 51%  | 31.5                                 | -44%   |
|              | 120000-199999 |       | 0.92  | 83%  | 65.4                                 | 0.77  | 49%  | 39.4                                 | -50%   |
|              | 200000+       |       | 0.95  | 90%  | 103.2                                | 0.80  | 54%  | 65.2                                 | -45%   |

### 1.3.5. Shipping's CO<sub>2</sub>e emissions

Carbon dioxide equivalency (CO<sub>2</sub>e) is a quantity that describes, for a given amount of GHG, the amount of CO<sub>2</sub> that would have the same global warming potential (GWP) as another long-lived emitted substances, when measured over a specified timescale (generally, 100 years). A total CO<sub>2</sub>e estimate is produced by combining CO<sub>2</sub> emissions totals estimated in Section 1 with other GHG substances estimated in Section 2 and their associated GWP.

The 5th IPCC Assessment Report (AR5) has changed the 100-year global warming potentials (GWP<sub>100</sub>) from previous assessments due to new estimates of lifetimes, impulse response functions and radiative efficiencies. The IPCC (2013) acknowledges that the inclusion of indirect effects and feedbacks in metric values has been inconsistent in IPCC reports, and therefore the GWPs presented in previous assessments may underestimate the relative impacts of non-CO<sub>2</sub> gases.

The GWPs reported in IPCC (2013) include climate-carbon feedbacks for the reference gas CO<sub>2</sub>, and for the non-CO<sub>2</sub> gases GWPs are presented both with and without climate-carbon feedbacks. In accord with IPCC (2013) such feedbacks may have significant impacts on metrics and should be treated consistently.

Using GWP<sub>100</sub> with climate-carbon feedbacks, primary GHGs (CO<sub>2</sub>, N<sub>2</sub>O and CH<sub>4</sub>) from shipping account for approximately 972 million tonnes of CO<sub>2</sub>e in 2012. International shipping is estimated to account for 816 million tonnes of CO<sub>2</sub>e for primary GHGs in 2012.


Time-series of bottom-up CO<sub>2</sub>e emissions estimates with climate-carbon feedbacks can be found in Table 18 and Table 19 and are presented in Figure 41a and b.

**Table 18 Bottom-up CO<sub>2</sub>e emissions estimates with climate-carbon feedbacks from total shipping (thousand tonnes).**

|                  | 2007             | 2008             | 2009           | 2010           | 2011             | 2012           |
|------------------|------------------|------------------|----------------|----------------|------------------|----------------|
| CH <sub>4</sub>  | 6,018            | 6,657            | 6,369          | 8,030          | 9,807            | 9,802          |
| N <sub>2</sub> O | 14,879           | 15,404           | 13,318         | 12,453         | 13,428           | 12,707         |
| CO <sub>2</sub>  | 1,100,100        | 1,135,100        | 977,900        | 914,700        | 1,021,600        | 949,100        |
| <b>Total</b>     | <b>1,120,997</b> | <b>1,157,160</b> | <b>997,587</b> | <b>935,183</b> | <b>1,044,835</b> | <b>971,608</b> |

**Table 19 Bottom-up CO<sub>2</sub>e emissions estimates with climate-carbon feedbacks from international shipping (thousand tonnes).**

|                  | 2007           | 2008           | 2009           | 2010           | 2011           | 2012           |
|------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| CH <sub>4</sub>  | 5,929          | 6,568          | 6,323          | 7,969          | 9,740          | 9,742          |
| N <sub>2</sub> O | 12,152         | 12,689         | 11,860         | 10,615         | 11,437         | 10,931         |
| CO <sub>2</sub>  | 884,900        | 920,900        | 855,100        | 771,400        | 849,500        | 795,700        |
| <b>Total</b>     | <b>902,981</b> | <b>940,157</b> | <b>873,284</b> | <b>789,983</b> | <b>870,678</b> | <b>816,372</b> |

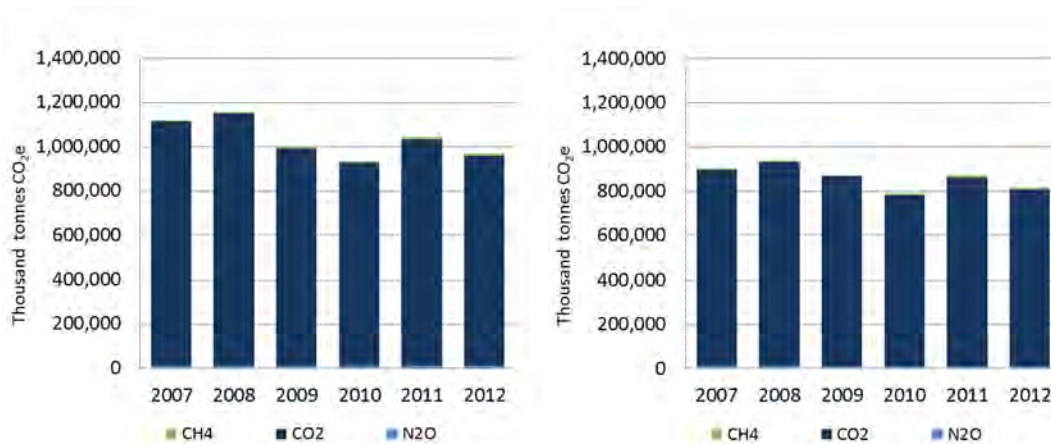

a. Total shipping b. International shipping  
**Figure 41 Time series of bottom-up CO<sub>2</sub>e emissions estimates for a) total shipping, b) international shipping.**

### 1.3.6. Shipping as a share of global emissions

Inventories of ship emissions can be compared with global anthropogenic totals to quantify the contribution of shipping to GHG totals from all human activity. The consortium evaluated the IPCC Assessment Report (AR5), a comprehensive technical document that has assembled global emissions estimates (IPCC 2013). AR5 provides global emissions totals for the year 2010 for a number of GHG substances, including CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub>O. It also refers to two sources that provide annual CO<sub>2</sub> emissions for the years 2007–2012 (Boden et al. 2013; Peters et al. 2013). Totals were converted from elemental C to CO<sub>2</sub> for comparison with the current study.

Comparisons of major GHGs from shipping are presented in Table 20–Table 23, using global totals identified in the recent AR5 report (IPCC 2013). Shipping accounts for approximately 3.1% of global CO<sub>2</sub> and approximately 2.8% of GHGs on a CO<sub>2</sub>e basis. International shipping accounts for approximately 2.6% and 2.4% of CO<sub>2</sub> and GHGs on a CO<sub>2</sub>e basis, respectively. These CO<sub>2</sub> and CO<sub>2</sub>e comparisons are similar to, but slightly smaller than, the 3.3% and 2.7% of global CO<sub>2</sub> emissions reported by IMO GHG Study 2009 for total shipping and international shipping, respectively.

**Table 20 Shipping CO<sub>2</sub> emissions compared with global CO<sub>2</sub> (values in million tonnes CO<sub>2</sub>).**

| Year           | Global CO <sub>2</sub> <sup>1</sup> | IMO GHG Study 2014             |                   |  |                   |
|----------------|-------------------------------------|--------------------------------|-------------------|--|-------------------|
|                |                                     | Total shipping CO <sub>2</sub> | Percent of global | International shipping CO <sub>2</sub> | Percent of global |
| 2007           | 31,409                              | 1,100                          | 3.5%              | 885                                    | 2.8%              |
| 2008           | 32,204                              | 1,135                          | 3.5%              | 921                                    | 2.9%              |
| 2009           | 32,047                              | 978                            | 3.1%              | 855                                    | 2.7%              |
| 2010           | 33,612                              | 915                            | 2.7%              | 771                                    | 2.3%              |
| 2011           | 34,723                              | 1,022                          | 2.9%              | 850                                    | 2.4%              |
| 2012           | 35,640                              | 949                            | 2.7%              | 796                                    | 2.2%              |
| <b>Average</b> | <b>33,273</b>                       | <b>1,016</b>                   | <b>3.1%</b>       | <b>846</b>                             | <b>2.6%</b>       |

1 Global comparator represents CO<sub>2</sub> from fossil fuel consumption and cement production, converted from Tg C y<sup>-1</sup> to million metric tonnes CO<sub>2</sub>. Sources: Boden et al. 2013 for years 2007–2010; Peters et al. 2013 for years 2011–2012, as referenced in IPCC (2013).

Table 21 Shipping CH<sub>4</sub> emissions compared with global CH<sub>4</sub> (values in thousand tonnes CH<sub>4</sub>).

| Year                | Global CH <sub>4</sub> <sup>1</sup> | IMO GHG Study 2014             |                   |  |                   |
|---------------------|-------------------------------------|--------------------------------|-------------------|--|-------------------|
|                     |                                     | Total shipping CH <sub>4</sub> | Percent of global | International shipping CH <sub>4</sub> | Percent of global |
| Average             | 96,000                              | 177                            | 0.18%             | 174                                    | 0.18%             |
| annual              |                                     | 196                            | 0.20%             | 193                                    | 0.20%             |
| CH <sub>4</sub> for |                                     | 187                            | 0.20%             | 186                                    | 0.19%             |
| decade              |                                     | 236                            | 0.25%             | 234                                    | 0.24%             |
| 2000-09             |                                     | 288                            | 0.30%             | 286                                    | 0.30%             |
|                     |                                     | 288                            | 0.30%             | 287                                    | 0.30%             |
| <b>Average</b>      |                                     | <b>229</b>                     | <b>0.24%</b>      | <b>227</b>                             | <b>0.24%</b>      |

1 Global comparator represents CH<sub>4</sub> from fossil fuel consumption and cement production. Source: IPCC (2013, Table 6.8).

Table 22 Shipping N<sub>2</sub>O emissions compared with global N<sub>2</sub>O (values in thousand tonnes N<sub>2</sub>O).

| Year                 | Global N <sub>2</sub> O <sup>1</sup> | IMO GHG Study 2014              |                   |   |                   |
|----------------------|--------------------------------------|---------------------------------|-------------------|---|-------------------|
|                      |                                      | Total shipping N <sub>2</sub> O | Percent of global | International shipping N <sub>2</sub> O | Percent of global |
| Average              | 700                                  | 50                              | 7.1%              | 41                                      | 5.8%              |
| annual               |                                      | 52                              | 7.4%              | 43                                      | 6.1%              |
| N <sub>2</sub> O for |                                      | 45                              | 6.4%              | 40                                      | 5.7%              |
| decade               |                                      | 42                              | 6.0%              | 36                                      | 5.1%              |
| 2000-09              |                                      | 45                              | 6.4%              | 38                                      | 5.5%              |
|                      |                                      | 43                              | 6.1%              | 37                                      | 5.2%              |
| <b>Average</b>       |                                      | <b>46</b>                       | <b>6.6%</b>       | <b>39</b>                               | <b>5.6%</b>       |

1 Global comparator represents N<sub>2</sub>O from fossil fuels consumption and cement production. Source: IPCC (2013, Table 6.9).

Table 23 Shipping GHGs (in CO<sub>2</sub>e) compared with global GHGs (values in million tonnes CO<sub>2</sub>e).


| Year           | Global CO <sub>2</sub> e <sup>1</sup> | IMO GHG Study 2014               |                   |  |                   |
|----------------|---------------------------------------|----------------------------------|-------------------|--|-------------------|
|                |                                       | Total shipping CO <sub>2</sub> e | Percent of global | International shipping CO <sub>2</sub> e | Percent of global |
| 2007           | 34,881                                | 1,121                            | 3.2%              | 903                                      | 2.6%              |
| 2008           | 35,677                                | 1,157                            | 3.2%              | 940                                      | 2.6%              |
| 2009           | 35,519                                | 998                              | 2.8%              | 873                                      | 2.5%              |
| 2010           | 37,085                                | 935                              | 2.5%              | 790                                      | 2.1%              |
| 2011           | 38,196                                | 1,045                            | 2.7%              | 871                                      | 2.3%              |
| 2012           | 39,113                                | 972                              | 2.5%              | 816                                      | 2.1%              |
| <b>Average</b> | <b>36,745</b>                         | <b>1,038</b>                     | <b>2.8%</b>       | <b>866</b>                               | <b>2.4%</b>       |

1 Global comparator represents N<sub>2</sub>O from fossil fuels consumption and cement production. Source: IPCC (2013, Table 6.9).


For the year 2012, total shipping emissions were approximately 949 million tonnes CO<sub>2</sub> and 972 million tonnes CO<sub>2</sub>e for GHGs combining CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub>O. International shipping accounts for approximately 2.6% and 2.4% of CO<sub>2</sub> and GHGs on a CO<sub>2</sub>e basis, respectively. International shipping emissions for 2012 are estimated to be 796 million tonnes CO<sub>2</sub> and 816 million tonnes CO<sub>2</sub>e for GHGs combining CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub>O.

Table 20 and Table 23 are also illustrated graphically in Figure 42a and b, respectively. The bar graphs may show more intuitively that global CO<sub>2</sub> and CO<sub>2</sub>e are increasing at

different rates than recently observed in the bottom-up results for shipping presented here. In other words, ship fuel use, CO<sub>2</sub> emissions, and GHG emissions (on a CO<sub>2</sub>e basis) have trended nearly flat while estimated global totals of these emissions have increased; this results in a recent-year decline in the percentage of shipping emissions as a fraction of global totals.

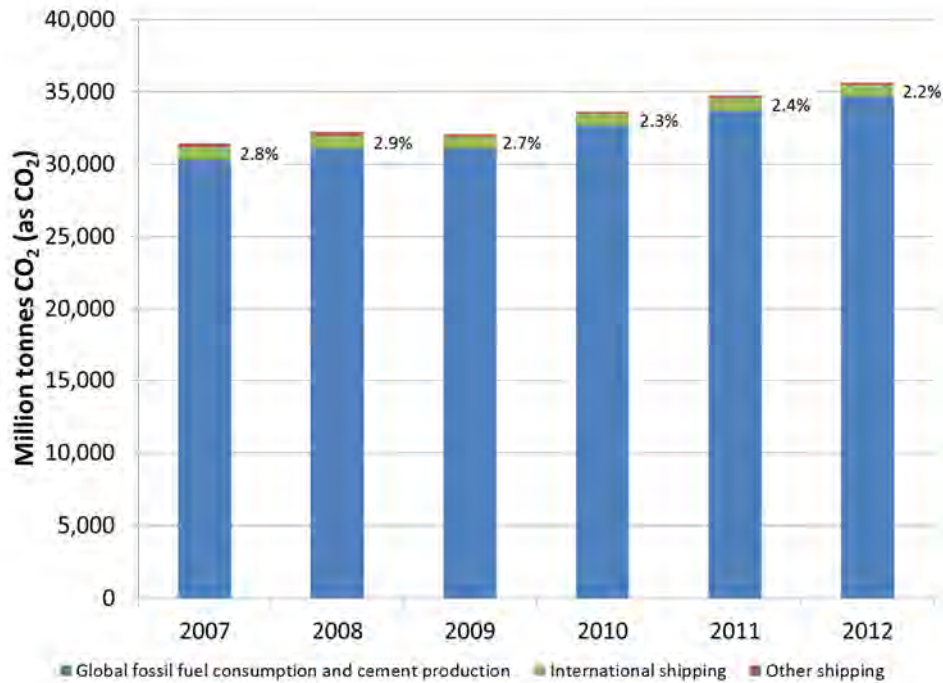

a.

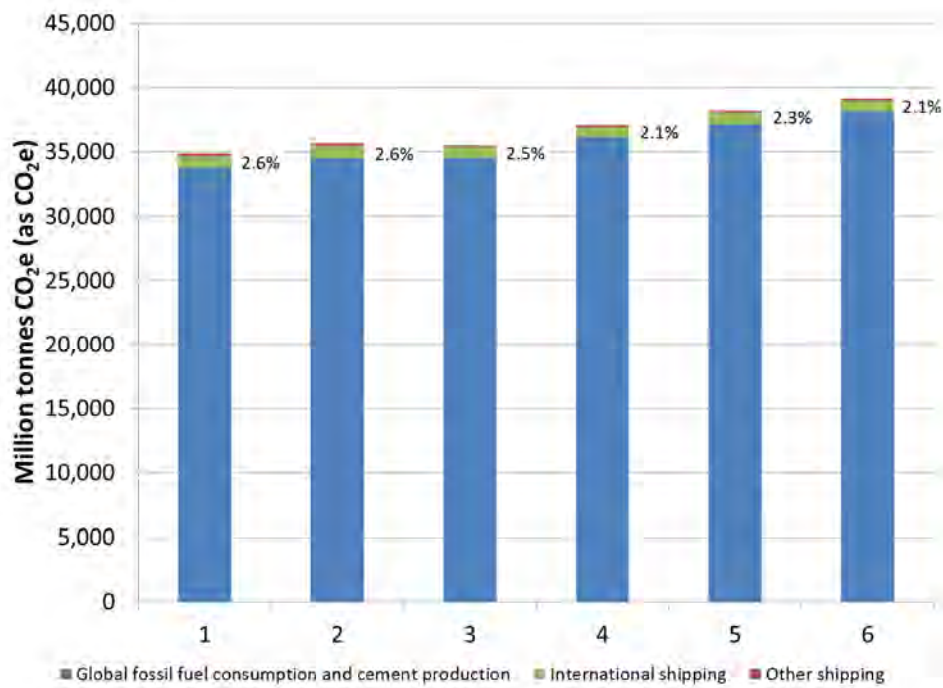

b.

Figure 42 Comparison of shipping with global totals: a) CO<sub>2</sub> emissions compared, where percent shows international shipping emissions CO<sub>2</sub> as a percent of global CO<sub>2</sub> from fossil fuels; b) CO<sub>2</sub>e emissions compared, where percent shows international shipping emissions CO<sub>2</sub>e as a percent of global CO<sub>2</sub>e from fossil fuels.

## 1.4. Quality assurance and control of top-down and bottom-up inventories

The quality analysis is presented in three sections. The first section discusses QA/QC for the top-down emissions inventory. The second section summarises the QA/QC elements of the bottom-up fuel and emissions inventory. The third section contains the comparison of the top-down and bottom-up emissions inventories. Sections 1.1 and 1.2 contain many detailed processes that constitute QA/QC effort; therefore these sections discuss QA/QC mainly in summary and to provide context for the quantitative bottom-up uncertainty analysis in Section 1.5.

### 1.4.1. Top-down QA/QC

Top-down statistics were evaluated for transparency and any significant discrepancies that might reflect confidence in inventories based on fuel statistics.

This section begins with a review of the IMO GHG Study 2009 and a brief discussion of data quality, confidence and uncertainty. It reviews relevant data quality information provided by the IEA, including information about likely causes of potential under- or overestimation of marine fuel use (both domestic and international). Top-down method QA/QC efforts undertaken specifically for this study are described. Lastly, this section reports the QA/QC summary of the study.

#### IMO GHG Study 2009: review of top-down data quality

The IMO GHG Study 2009 performed qualitative analyses of errors and inconsistencies of IEA statistics to help explore how the top-down and bottom-up discrepancy may be explained by uncertainty in reported fuel statistics. That study identified the following potential issues with top-down data:

- different data quality between OECD and non-OECD countries (fishing);
- identical numbers from year to year for some countries;
- big swings from year to year for other countries;
- differences in EIA bunkers statistics.

Although a number of challenges were recognised, mainly arising from the use of different data sources, the sources of uncertainty remained unexplored and potential corrections were not attempted.

The IMO GHG Study 2009 explicitly quoted provisions in the IEA Agreement on an International Energy Program (IEP) that determined which fuels would be considered in national oil stocks and which were considered to be counted as international data. In particular, international marine bunkers were 'treated as exports under a 1976 Governing Board decision incorporated into the Emergency Management Manual' (Scott 1994). This information and subsequent discussion in the IMO GHG Study 2009 suggested that some degree of allocation error among international bunkers, exports and/or imports could be a factor in the accuracy of top-down fuel statistics for shipping.

#### IEA statistics: review of top-down data quality

The IEA collects data from OECD countries that have agreed to report mandatory data through monthly and joint annual IEA/Eurostat/UNECE questionnaires. For non-OECD countries, the IEA collects data through voluntary submissions (using no standard format) or through estimates made by the IEA or its contractors. Figure 41 presents a map of OECD and non-OECD countries that provide energy data to the IEA; not all of these countries have marine fuel sales to report (Morel 2013).

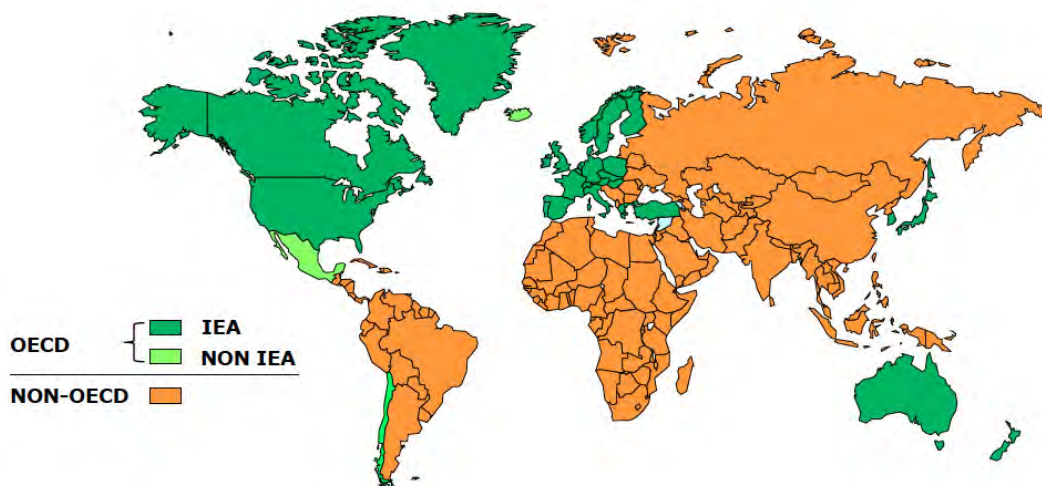


Figure 43 OECD versus non-OECD data collection system.

The IEA acknowledges that challenges remain in collecting international marine bunkers data worldwide; however, compared to other sources the IEA database seems consistent across the years and is regularly updated. According to Morel (2013), the revisions in the IEA international marine bunkers database have improved its quality; the database published in 2012 covers 139 individual countries compared to the 137 of the 2007 database. Of these 139 countries, the 54 countries that represent 80% of the total sale have used official energy statistics. Another six countries, representing 14% of the total sale, have used other sources, such as port authorities, oil companies and data provided by FACTS Global Energy (<http://www.fgenergy.com>). Lastly, in 2012 edition, data have been estimated for 33 countries that represent only 6% of the total sale, considering, for example, residual GDP growth and marine traffic growth (Morel 2013).

In addition to directly reported IEA marine fuel statistics, the consortium reviewed the energy balances of each fuel to inform the uncertainty analysis for top-down marine fuel consumption in Section 1.5. This provides QA/QC and enables an estimate of potential uncertainty around reported fuel sales for the marine sector (domestic and international).

For example, corroborating information about the potential for under- or over-reporting international marine bunkers includes:

1. From Energy Statistics for Non-OECD Countries, IEA, 2009 edition: *'For a given product, imports and exports may not sum up to zero at the world level for a number of reasons. Fuels may be classified differently (i.e. residual fuel oil exports may be reported as refinery feedstocks by the importing country; NGL exports may be reported as LPG by the importing country, etc.). Other possible reasons include discrepancies in conversion factors, inclusion of international marine bunkers in exports, timing differences, data reported on a fiscal year basis instead of calendar year for certain countries, and underreporting of imports and exports for fiscal reasons.'*
2. From the OECD Factbook 2013 (Energy Supply, page 108) and Factbook website: *'Data quality is not homogeneous for all countries and regions. In some countries, data are based on*



*secondary sources, and where incomplete or unavailable, the IEA has made estimates. In general, data are likely to be more accurate for production and trade than for international bunkers or stock changes. Moreover, statistics for biofuels and waste are less accurate than those for traditional commercial energy data.'*

In summary, the IEA and OECD identify specific types of error in energy data that involve marine bunkers. The first is allocation or classification error involving imports, exports and marine bunker statistics. The second is country-to-country differences in data quality, specifically related to poor accuracy for international bunkers or stock changes. These insights helped inform the consortium's direct QA/QC and uncertainty efforts.

#### 1.4.2. Top-down QA/QC efforts specific to this study

This study independently confirmed the statistical balances of IEA energy statistics on both global and large regional scales. Specifically, the calculation of statistical difference at the national and regional levels was verified and discrepancy between imports and exports reported by the IEA was confirmed.

Second, as in the IMO GHG Study 2009, the consortium researched other international energy data providers to understand whether international marine bunkers records were considered to be similar to or different from IEA statistics. This included research into data quality studies for non-IEA energy statistics.

#### Comparisons with EIA top-down statistics and other resources

The following resources were evaluated for a) their similarity to IEA statistics and b) complementary data quality investigations.

The consortium evaluated EIA International Marine Bunker Fuel Oil data for 2007–2010 (the IEA did not provide more recent data than 2010 during the period this study was conducted). Moreover, the EIA statistics available on the U.S. Department of Energy website did not provide data for gas diesel international marine bunkers, nor break down domestic marine fuel consumption, nor identify fishing vessel consumption. These data may be available from the EIA; however, given that additional EIA data provide limited opportunities to improve QA/QC in top-down estimates these data were not pursued.

Table 24 and Figure illustrate continued discrepancies in statistical reporting between the IEA and EIA, similar to those documented in the IMO GHG Study 2009. Namely, the IEA data report consistently greater fuel oil consumption than the EIA data for international marine bunkers. This is indicated in Figure 43 by the scatter plot for the period 2000–2010, the regression line and the confidence interval of the best-fit line.

**Table 24 Comparison of fuel sales data between IEA and EIA in international shipping (million tonnes).**

| Fuel oil statistics          | Source | 2007  | 2008  | 2009  | 2010  | 2011  |
|------------------------------|--------|-------|-------|-------|-------|-------|
| International marine bunkers | IEA    | 174.1 | 177.0 | 165.9 | 178.9 | 177.9 |
|                              | EIA    | 155.3 | 158.8 | 160.9 | 171.2 |       |
| Percent difference           |        | 11%   | 10%   | 3%    | 4%    |       |

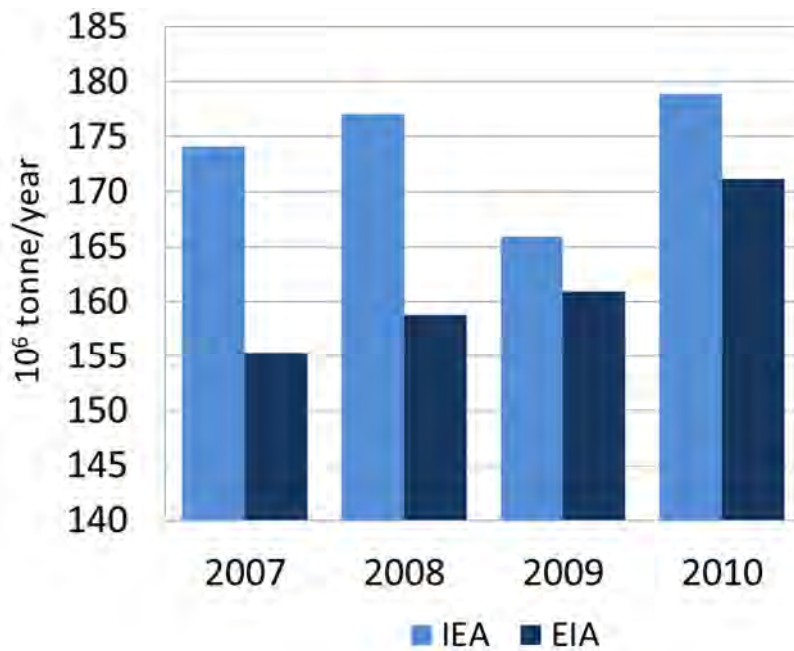


Figure 44 Comparison of IEA and EIA international marine bunker fuel oil statistics.

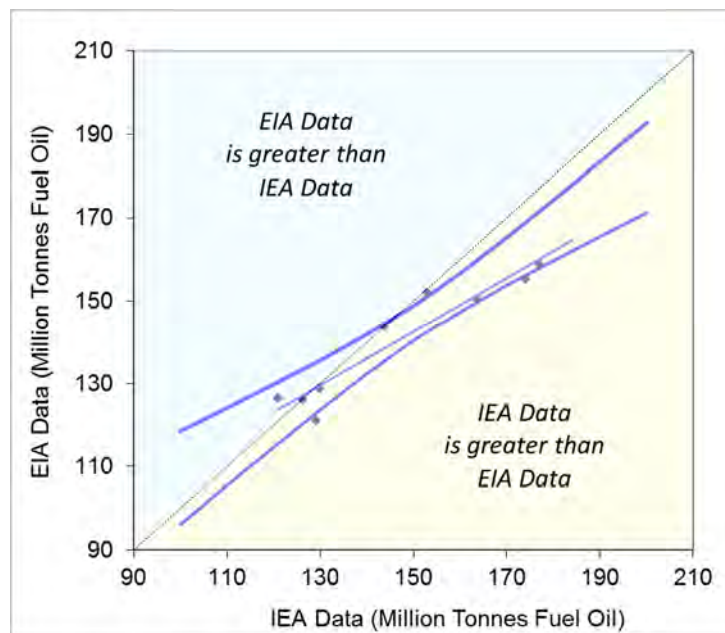


Figure 45 Confidence bands showing statistical difference between IEA and EIA data.

### Results of top-down QA/QC

The top-down QA/QC provides a thorough understanding of the quality and limitations of the top-down inventory. This review shows that IEA revisions to statistics can change the total fuel sales estimate by as much as 10% due to documented quality controls in place at IEA. A rigorous review of IEA QA/QC practices indicates that the energy balances continue to represent high-quality representation of OECD and non-OECD energy statistics.

Our IEA data comparison with EIA fuel oil statistics for international marine bunkers indicate that year-on-year fuel sales data can differ by more than 10% and that the IEA tends to report more international marine bunkers over the period of 2000–2010.

Lastly, the IEA presentation to the IMO Expert Workshop in 2013 indicated that significant uncertainties are not fully documented and require further analysis (see Section 1.5). For example, under- or overestimates of international marine bunkers could result from allocation or classification errors – imports, exports, marine bunker statistics, fuel transfers between sectors (as is typical for blending marine bunkers with other fuels to meet ship/engine fuel quality specifications) – and that poor data quality among reporting countries could restrict the accuracy of international bunkers estimates.

#### 1.4.3. Bottom-up QA/QC

The key findings of the bottom-up quality assurance and quality control analysis include:

- Quality in fuel consumption totals is extensively analysed by a number of independent sources (both independent of the data used in the model and independent of each other).
- This assurance effort represents significant progress relative to all prior global ship inventories (including the IMO GHG Study 2009). These QA/QC efforts demonstrate that a reliable inventory of fuel consumption broken down by fleets of ships and their associated activity statistics has been achieved in this study.
- There is a step change improvement in quality in the bottom-up inventory between the earlier years (2007–2009 inclusive) and later years (2010–2012 inclusive), which can be attributed to the increased coverage (both temporal and spatial) of the AIS data and therefore the accuracy of the activity estimate. This also underpins better confidence in bottom-up emissions totals, based on the same methods, using consensus emissions factors derived from reviewing published emissions factors.
- The key data sources that have enabled the high quality of this study, particularly S-AIS data, continue to increase in quality. This is due to continuous improvement of the algorithms on the receivers, increased numbers of satellites providing greater spatial and temporal coverage, and increased experience in filtering and processing the raw data for use in modelling.
- A quality advantage in this work is that our approach for the bottom-up activity-based inventory uses calculations for individual vessels. By maximising vessel-specific activity characterisation using AIS data sources, this work quantifies the variability among vessels within a type and size category. This eliminates the dominant uncertainties reported by the previous IMO GHG Study 2009 and most published inventories.
- The AIS-informed bottom-up methodologies cannot directly distinguish between fuel type or voyage type, which requires additional analyses and some expert judgement. Our QA/QC on allocation of residual/distillate fuels (HFO/MDO) and international/domestic shipping provides transparent and reproducible methodologies, with the opportunity to adjust these if and when better information becomes available in the future.

At the time this report was written, there were too few datasets of onboard measurements of CO<sub>2</sub> emissions for any statistically representative quality assurance investigation of the modelled CO<sub>2</sub> emission to be carried out. Therefore, the closest the quality assurance can get to the end product of this study is the fuel consumption comparison (modelled estimate compared with operator data), carried out using noon report data. This is done for a sample of approximately 500 ships (approximately 1% of all vessels) representing over 60,000 days of at-sea operation. This sample is

described in detail in Annex 3. It should be noted that noon report data are not infallible; their reliability and the implications for the comparative analysis undertaken here are discussed in greater detail in Annex 3.

To provide further assurance of the inputs and assumptions of the bottom-up method, specifically the activity estimate, the consortium also performed analysis with LRIT data (approximately 8000 ships and 10% of the global fleet) and third-party literature study.


Noon reports, LRIT data and the literature were used for the following components of quality assurance work.

- The activity estimation quality was assured using:
  - spatial coverage analysis with information on the number of messages received in different geographical locations and contrasting the AIS coverage with coverage maps obtained from alternative sources (e.g. LRIT);
  - temporal coverage analysis to test whether the derived profiles of time spent in different modes of operation (e.g. in port, at sea) and at different speeds are representative;
  - comparison of the AIS-derived activity parameters speed and draught against noon report data;
  - description of coverage statistics for each year and each fleet (to evaluate AIS completeness and facilitate imputed algorithms to estimate CO<sub>2</sub> emissions from periods when observations are missing).
- Fleet specifications and model assumption quality were assured using:
  - investigations into the robustness of the IHSF database;
  - comparative evaluation of prior work, independently produced and published by consortium members, including peer-reviewed reports and scientific articles;
  - consultation of third-party inventory and shipping literature (including the work of consortium partners) providing substantial fleet data.
- Fuel consumption estimate quality was assured using:
  - comparison of calculated fuel consumption to operators' data recorded in noon reports pooled from data independently collected by several consortium partners.

It should be noted that noon report data are not infallible; their reliability and the implications for the comparative analysis undertaken here are discussed in greater detail in Annex 3, along with detailed QA/QC for the source data and other analyses.

#### **Spatial coverage of activity estimates QA/QC**

The AIS data coverage, in terms of both space and time, is not consistent year-on-year during the period studied (2007–2012). For the first three years (2007–2009), no satellite AIS data were available, only data from shore-based stations. This difference can be seen by contrasting the first (2007) and last (2012) years' AIS datasets, depicted by geographical coverage in Figure 44.

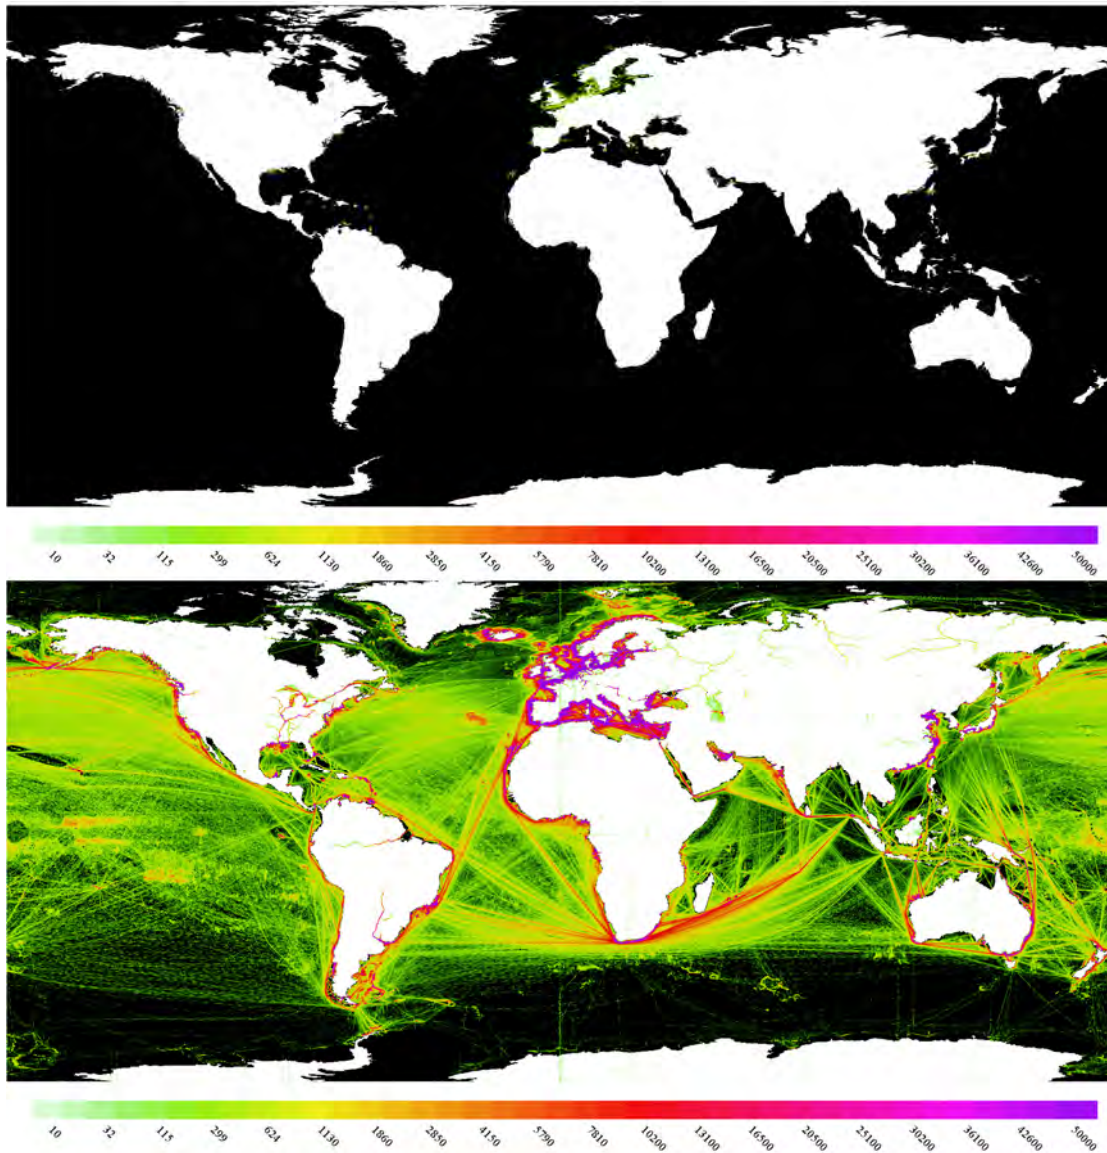

**Figure 46 Geographical coverage in 2007 and 2012, coloured according to the intensity of messages received per unit area. This is a composite of both vessel activity and geographical coverage, so the intensity is not solely indicative of vessel activity.**

The consequence of the change in coverage over time and the quality of the regional coverage can be inferred from an analysis of the number of messages received in different sea regions. Two investigations were carried out, on large oil tankers and large bulk carriers, both ship types that were anticipated to be engaged in activity on routes that encompassed most of the world's sea areas. Figure 47 displays the trend over time in the number of messages received in different sea regions for a random sample of 300 large oil tankers. The number of messages received is a composite of the number of ships in an area, the duration of time they spend in an area and the geographical coverage of an area. This analysis cannot isolate the change in geographical coverage alone. However, the marked contrast in open ocean regions (e.g. Indian Ocean, South Atlantic Ocean, and North Atlantic Ocean) over time shows increased quality of coverage on a regional level. Importantly, by 2012, there are no sea areas for which no activity is observed, which implies that by the latter years coverage quality has minimal regional bias. Greater detail and maps of both AIS and LRIT data for further years is provided in Annex 3 (details for Section 1.4).

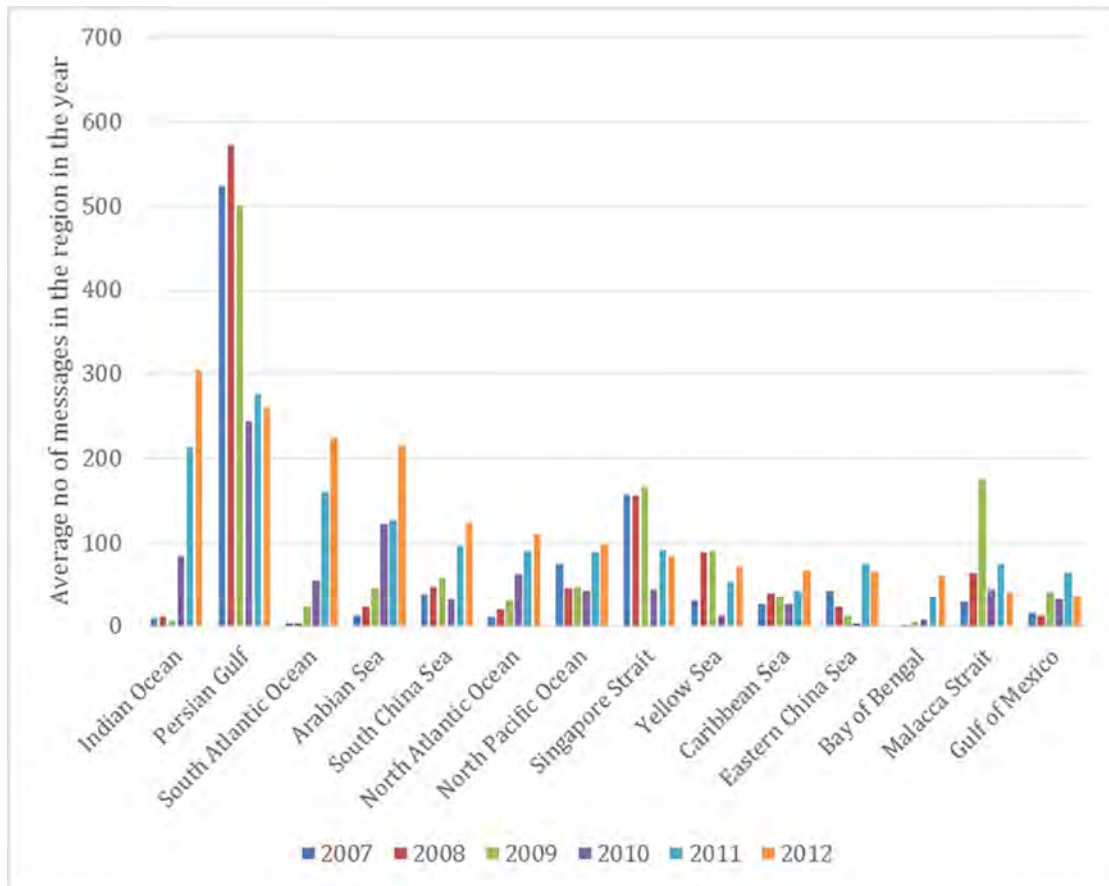


Figure 47 The average volume of AIS activity reports for a region reported by a vessel for up to 300 randomly selected VLCCs (2007–2012).

### Temporal coverage of activity estimates QA/QC

LRIT data were used for the quality assurance of the AIS-derived activity estimates. The total time spent at sea and in port for individual ships over the course of a year was analysed using both the LRIT data (which have a consistently high reliability) and the AIS data (for varying levels of coverage and reliability). This analysis was carried out for each of the ships observed in both the LRIT and the AIS datasets (approximately 8000, for years 2009–2012). Figure 48 shows the evaluation of the difference between the LRIT and the AIS-derived days at sea estimate. In this comparison, the LRIT-derived estimate is assumed to be the benchmark; therefore deviations from a mean difference of zero imply deterioration in quality of the AIS-derived estimate.

Figure 48 shows that in 2012, for reliable observation of a ship above 50% of the time during the year, the mean difference between the AIS and LRIT converges to approximately zero. However, as the percentage of time for which reliable observations reduces, a significant bias occurs with the AIS-derived activity estimate, which appears to underestimate time spent at sea. Figures in Annex 3 demonstrate that a similar trend (good quality of reliable observations for 50% of the year or more) can be observed in 2010 and 2011.

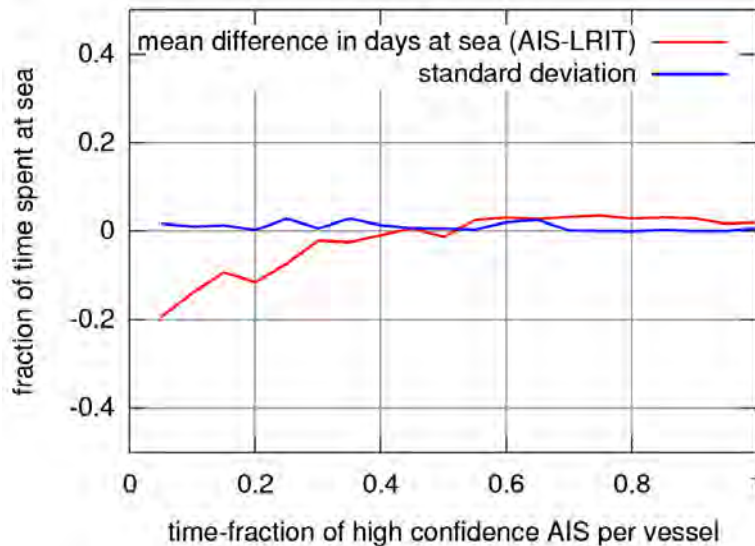


Figure 48 Activity estimate quality assurance (2012).

Greater detail of the derivation of parameters from the LRIT datasets and their application in this comparative analysis is given in Annex 3, along with analysis for 2010 and 2011.

#### Activity estimates and derived parameters (speed and draught)

In addition to the analysis carried out using LRIT data, a further quality analysis of the bottom-up method's estimate of activity (time in mode, speed estimation, draught estimation and distance covered) can be obtained using noon report data. Noon report data record information daily, including average speed during the period of the report and distance travelled. Noon reports also record the date and time a voyage begins and ends. This information was aggregated over quarters, compared with the same data calculated using the bottom-up model, and aggregated to the same quarter of each year.

The results for 2012 are presented in Figure 49 and Figure 50. The red line represents an ideal match (equal values) between the bottom-up and noon report outputs, the solid black line the best fit through the data and the dotted black lines the 95% confidence bounds on the best fit. The 'x' symbols represent individual ships, coloured according to the ship-type category listed in the legend. The plots include all results, with no outliers removed.

The activity estimation of days at sea and at port can be seen to have some scatter. This scatter is related to the fact that for some of the time the ship is not observed and an extrapolation algorithm is used to estimate activity. For any one ship, the reliability of that extrapolation is low. However, overall, the distribution is approximately even and does not represent a significant degree of bias, as the best-fit line shows. The reliability of the estimate of at-port and at-sea days appears consistent regardless of ship type.

The quality of the estimation of ship speed when at sea is higher than the quality of the port and sea time estimation. The best-fit line shows close alignment with the red equilibrium line, albeit with a trend towards underestimating the speeds of the larger container ships. The confidence bounds are closely aligned to the best-fit line.

The draught observation shows the lowest quality of fit. The observed scatter implies a bias for the bottom-up method to slightly over-estimate draught. The agreement for

ship types with low draught variability (e.g. container ships) is good. This implies that the overall poor reliability is likely to be due to infrequent updating of the draught data reported to the AIS receiver.

In earlier years (see Annex 3 for the data), similar relative quality assurance between the variables plotted can be obtained; however the absolute quality reduces for the earlier years, particularly 2007, 2008 and 2009. This can be seen by comparing the 2012 results with Figure 51, even accounting for the fact that in 2009 there are fewer ships in the noon reports dataset. Days at sea and at-sea speed have significantly more scatter and therefore wider confidence bounds than the equivalent plots in 2012. With the exception of some outlier data in 2009, the speed agreement is moderate. However, the days-at-sea agreement implies that there is some bias, with the bottom-up method consistently overestimating the time that the ship is at sea. This supports the findings of the activity estimate quality assurance work undertaken using LRIT data.

A more detailed description of the noon report data sources, the method for assembling the data for comparison purposes and further years' analysis results can be found in Annex 3.



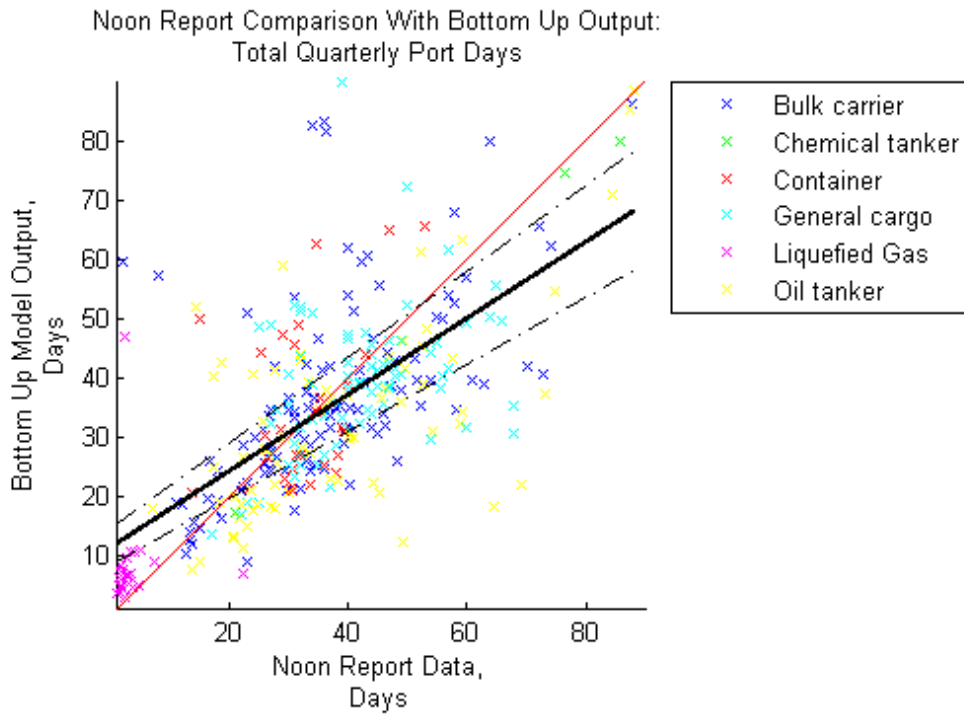
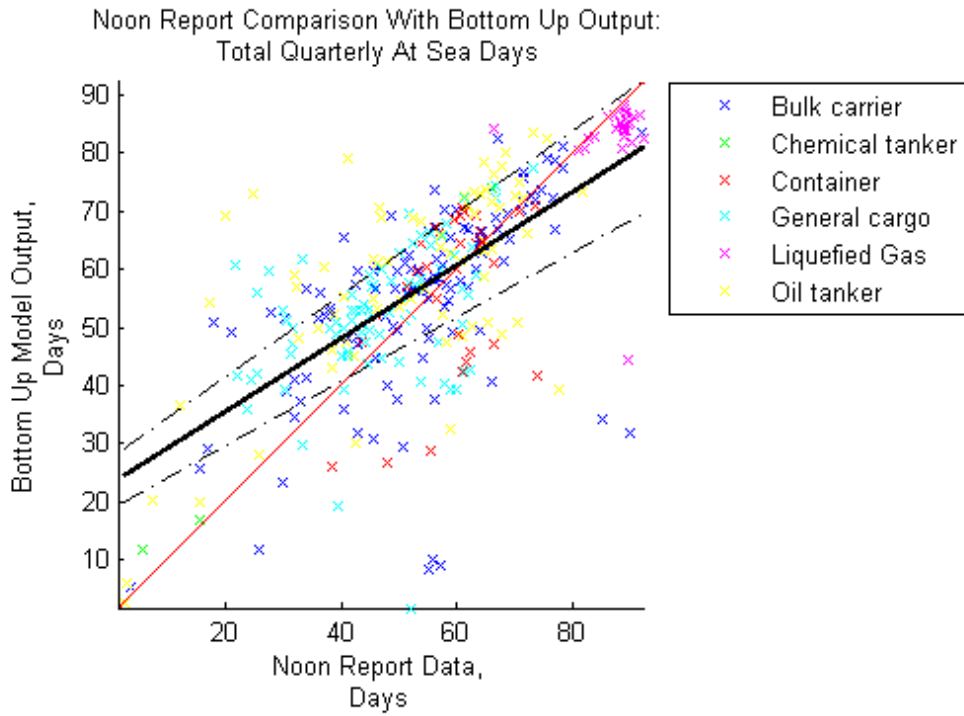


Figure 49 Comparison of at-sea and at-port days are calculated from both the bottom-up model output (y-axis) and the noon report data (x-axis) (2012).

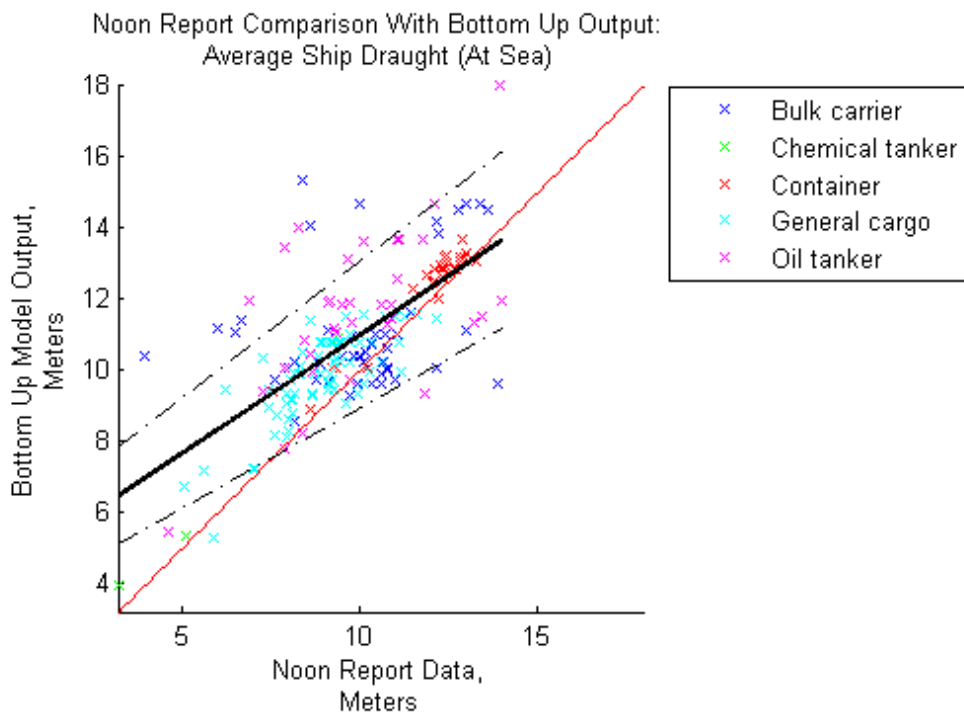
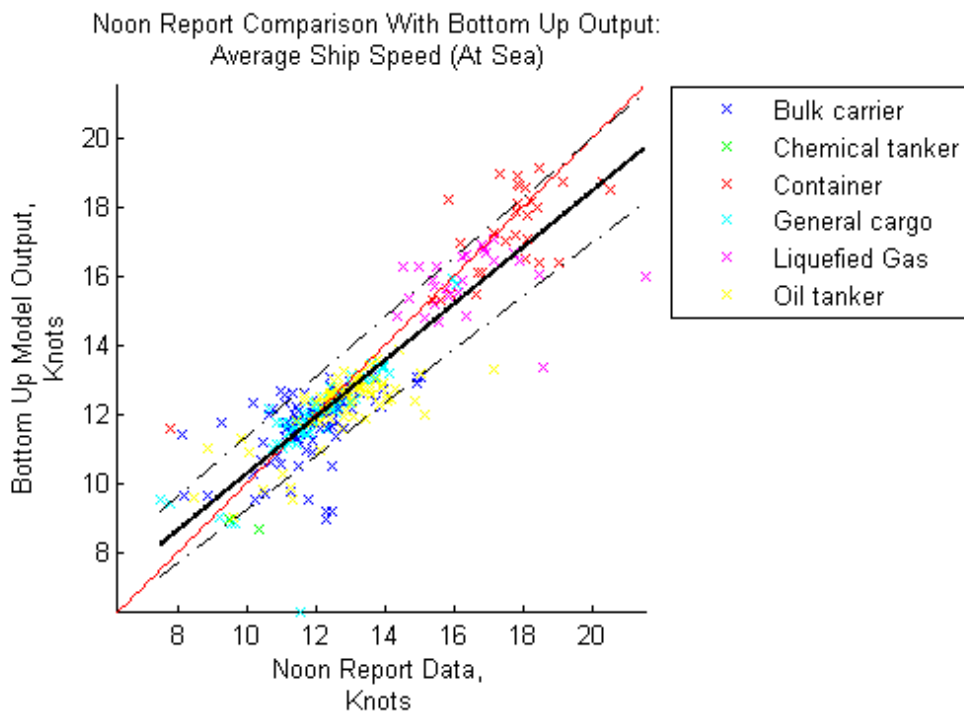


Figure 50 Comparison of at-sea and at-port days are calculated from both the bottom-up model output (y-axis) and the noon report data (x-axis) (2012).

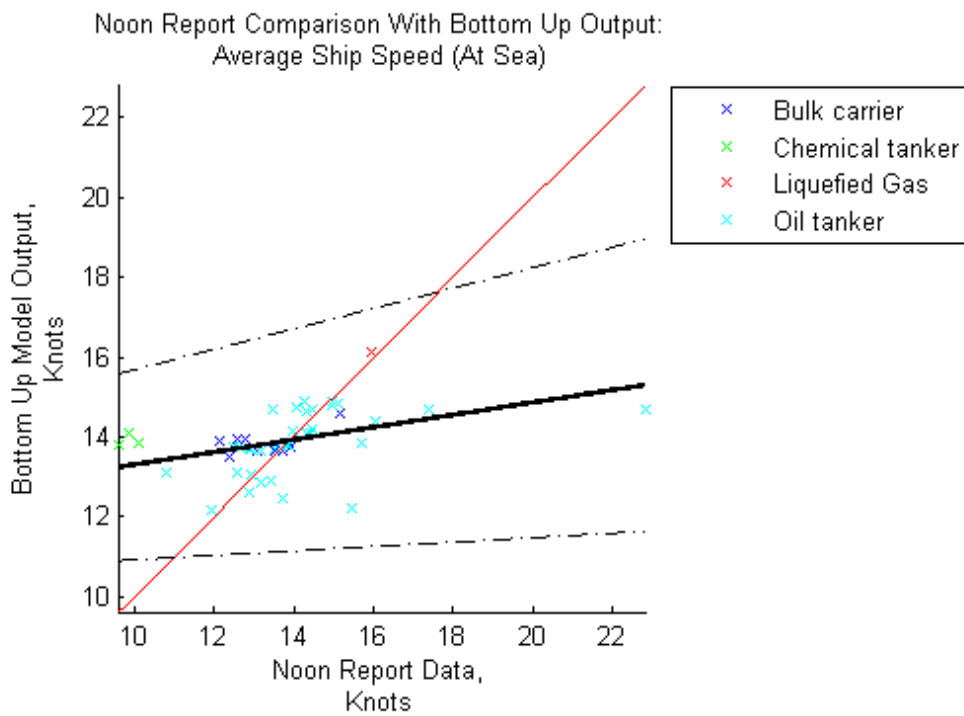
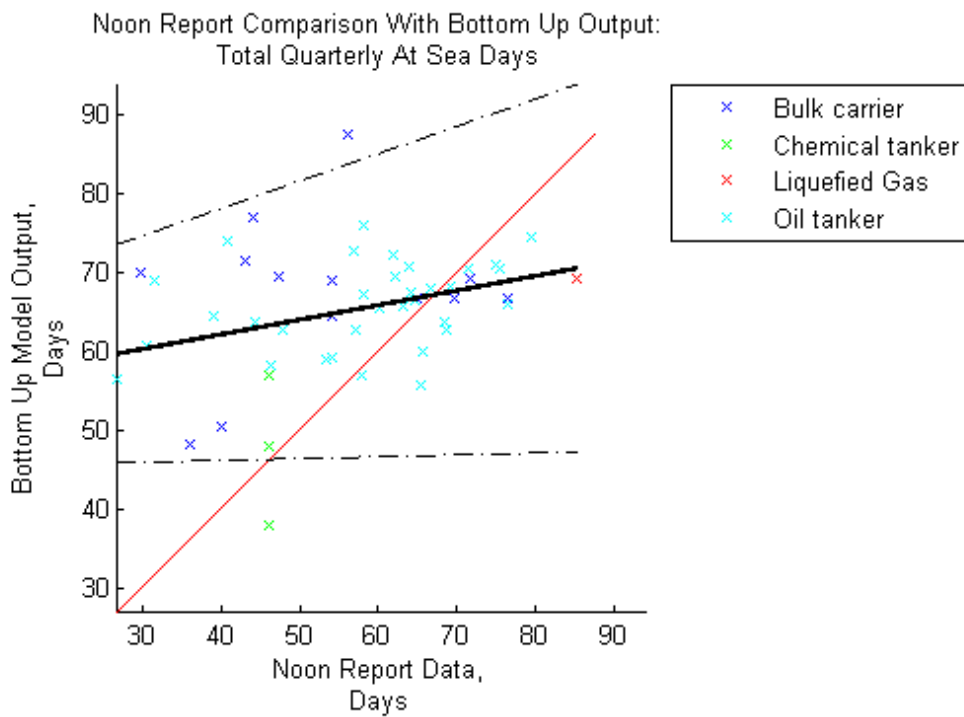


Figure 51 Comparison of at-sea days and average ship speed, calculated from both the bottom-up model output (y-axis) and the noon report data (x-axis) (2009).

### **Fleet specifications and model assumptions quality assurance**

Fleet specifications were based on the IHS vessel characteristics database, which was used in the following ways:

- identifying the various vessel types using Statecodes 3 and 5;
- counts of vessels within the various vessel types making up the world fleet;
- subdividing common vessel types into bin sizes based on deadweight tonnage or various capacity parameters;
- providing vessel technical details, such as installed main engine power, maximum sea trial speed and other parameters used in estimating vessel emissions;
- determining each vessel's operational status by quarter for each year inventoried.

The IHS data were treated as accurate; however this accuracy assumption introduces uncertainties if the data fields used are indeed inaccurate or unrepresentative. Potential uncertainties with the vessel characteristics data include:

- data quality – does the field consistently represent the actual ship's parameter?
- data source accuracy – is the field measured/recorded/verified on board the ship directly and is the field accurate?
- update frequency – is the field updated at least quarterly (when a change has occurred)?

Data fields that have been independently spot checked by consortium members indicate that the vessel class fields (Statecodes 3 and 5), main engine installed power, maximum sea trial speed, and deadweight tonnage appear to be generally representative of actual vessel conditions. The ship status field, which is used to identify whether the ship is in-service, is shown consistently to include more ships than are observed in AIS (see Section 1.4 for details), for all ship size and type categories. There are two explanations for this observation, either that the AIS coverage is not capturing all in-service ships, or that the IHSF database is incomplete in its coverage of the number of active ships.

Another uncertainty associated with the vessel characteristics database concerns blanks and zeroes in fields that should not be blank or zero (i.e., length, deadweight, speed, etc.). To fill blanks or zeroes, valid entries were averaged on a field-by-field basis for each vessel type and bin size. These averages were used to fill blanks and zeroes (as appropriate) within the same vessel type and bin size to allow emission estimates to be completed. The fields in which gap-filling was used included main engine installed power, deadweight tonnage, length, draught maximum, maximum sea trial speed, RPM and gross tonnage. This assumes that the average of each vessel type and bin size is representative of vessels with a blank or zero and that the blanks and zeroes are evenly distributed across the bin.

In addition to the uncertainties listed here, there is uncertainty about the auxiliary engine and boiler loads by vessel class and mode. As stated previously in Section 1.2.5 and Annex 1, there are no definitive data sets that include loads by vessel class and operational mode for auxiliary engines and boilers. This study incorporates observed vessel data collected by Starcrest as part of VBP programmes in North America (Starcrest 2013) and vessel auxiliary engine data collected by the Finnish Meteorological Institute for use in its modelling to build upon the IMO GHG Study 2009 findings in this topic area. This improvement injects real observed data and additional technical details but still relies on significant assumptions. Due to the nature of the sources profiled, the wide array of vessel configurations and operational

characteristics, this area of the global vessel emissions inventory will remain an area of significant assumption for the foreseeable future.

Relating to auxiliary engine and boiler loads, by mode, the following uncertainties that are inherent in AIS and satellite data have a direct impact on the emissions estimated. For example:

- Vessels moving less than 1 knot, for a certain period of time, are assumed to be at berth. This assumption has implications for the oil tanker vessel class in which tankers at berth and not moving faster than 1 knot will have auxiliary loads associated with discharging cargoes, which are significantly higher than a vessel at anchorage.
- Vessels moving at less than 3 knots are assumed to be at anchorage. This assumption will cover vessels that are manoeuvring and that will typically have a higher auxiliary load than those at anchorage. However, tankers at offshore discharge buoys would not be assigned at-berth discharging loads for the auxiliary boilers.

Finally, EF and SFOC remain areas of uncertainty. Emission testing is typically limited for vessels and when the various engine types, vessel propulsion and auxiliary engine system configurations, and diverse operational conditions are considered, emission tests do not cover all the combinations. Testing that has been conducted to date relies on previously agreed duty cycles, like the E3 duty cycle for direct-drive propulsion engines. With the advent of slow steaming, is the E3 duty cycle still relevant? There are very few tests that evaluate engine loads below 25%, which is the lowest load in the E3 cycle. Further, when looking at emissions beyond NO<sub>x</sub>, which is required to be tested during engine certification, the number of valid tests available for review significantly drops off. Similar to EF testing, published SFOC data are limited, particularly over wide engine load factor ranges (% MCR). There is uncertainty around the effects engine deterioration has on an engine's emissions profile and SFOC.

### **Boiler usage**

Hot steam on board ships is used to provide cargo and fuel oil heating as well as to run cargo operations with steam-driven pumps. The energy required to run these operations is usually taken from auxiliary boilers running on fossil fuels, mainly HFO. During voyages, waste heat from the main engine is used to provide the energy needed for steam generation. However, at low engine loads, the heat provided by the exhaust boiler is not enough to meet all the heating demand on board. At low engine loads, both the auxiliary boiler and waste heat recovery provide the heat needed by the vessels. The shift from exhaust to auxiliary boilers happens at 20–50% engine load range (Myśków & Borkowski 2012), illustrated in Figure 52.

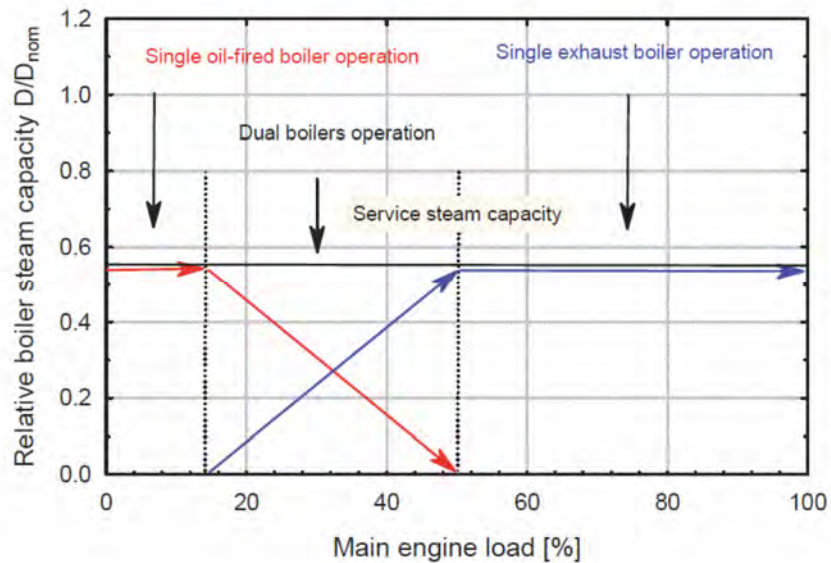


Figure 52 General boiler operation profile (Myśków & Borkowski 2012).

With lower engine loads the auxiliary boiler is the main source of heat on board a vessel. With sufficiently high engine loads, waste heat recovery can produce enough steam for the vessel and the auxiliary boiler may be switched off. The operational profile of the auxiliary boiler of a container carrier is presented in Figure 53.

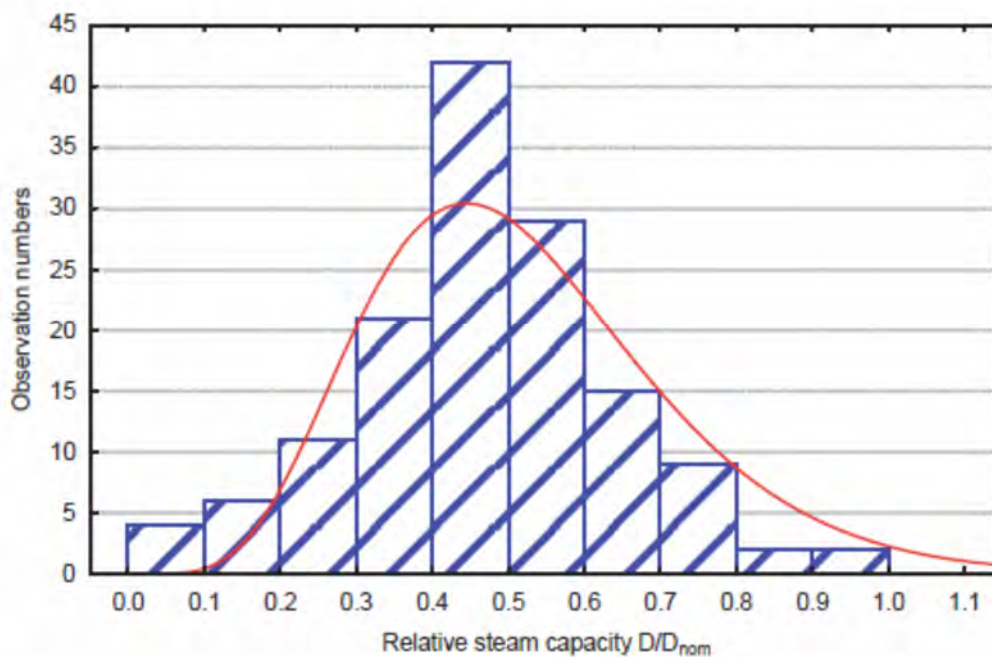


Figure 53 Operational profile of an auxiliary boiler of a container vessel during six months of operations (Myśków & Borkowski 2012).

For a container vessel, less than half of the auxiliary boiler capacity was reported in use most of the time. Over six months of operation, 40–60% of the boiler steam capacity was used for nearly 100 days. Of the total 182 days, 125 were spent at-port or in low load conditions, where auxiliary boilers were needed (Myśków & Borkowski 2012).

### Sources of boiler data

Determination of installed boiler capacity on board vessels cannot be done based on IHSF data, because this information is excluded. Class societies report boiler installations and capacity for their vessels only rarely and scant details about boilers are available from publications like *Significant Ships*. Because of this lack of data, boiler usage profiles have been estimated from vessel boarding programmes and crew interviews. This method is similar to the data collection procedure used to obtain information about auxiliary engine power profiles.

Waste heat recovery (exhaust economisers) is assumed to be in use during cruising. Vessel operational profiles for low load manoeuvring, berthing and anchoring have auxiliary boiler use. For further details, see Annex 3.

### Fuel consumption estimate quality assurance

Following the same method used to produce the activity estimate comparison between the bottom-up model and noon report data, Figure 54 and Figure 55 show the results for average daily fuel consumption at sea (main engine and auxiliary engine), and the total main and auxiliary fuel consumption at sea (excluding port fuel consumption) in 2012. (Comparative analysis results for all other years of the study can be found in Annex 3). No data were available in the noon report dataset for the fuel consumption in boilers and so the quality of boiler information from noon reports could not be independently verified for quality.

The average daily fuel consumption plot for the main engine demonstrates the reliability of the marine engineering and naval architecture relationships and assumptions used in the model to convert activity into power and fuel consumption. An exception to this is the largest container ships, whose daily fuel consumption appears to be consistently underestimated in the bottom-up method.

The total quarterly fuel consumption for the main engine plot demonstrates that the activity data (including days at sea) and the engineering assumptions combine to produce generally reliable estimates of total fuel consumption, at least in recent years when AIS observations are more complete. The underestimation of the daily fuel consumption of the container ships can also be seen in this total quarterly fuel consumption.

Both auxiliary engine comparisons (daily and total quarterly) imply that the bottom-up estimates of auxiliary fuel consumption are of lower quality than those of the main engine. There are two possible explanations for this: the low quality of noon report data for auxiliary fuel consumption, or the low quality of bottom-up method estimates. Both are likely. Auxiliary fuel consumption in the noon report dataset is commonly reported as zero. This could be because:

1. a shaft generator is used;
2. the main and auxiliary power is derived from the same engine (in the case of LNG carriers);
3. the auxiliary fuel consumption is not monitored or reported.

Discussion with the operators from whom the data originated suggested that the second and third explanations are the most likely.

As described in Section 1.2, the method for auxiliary engine fuel consumption estimation is derived from samples taken from vessel boardings and averaged for ship type and size-specific modes (at berth, at anchor and at sea). This method is used because of the scarcity of data about the installed auxiliary engine in the IHSF database and the shortage of other information in the public domain describing operational profiles of auxiliary engines.

Figure 56 presents the comparison between the noon report and the bottom-up method in 2012, but with a filter applied to include only data for which the AIS-derived activity was deemed reliable for more than 75% of the time in the quarter. Otherwise, the data source is the same. The marked improvement of the agreement is demonstration of the reliability of the bottom-up method in converting activity into fuel consumption and shows that the largest source of uncertainty in the total fuel consumption is the estimate of activity – particularly the estimate of days at sea.

Figure 57 and Figure 58 present the quality assurances estimates for 2007 and 2009 respectively. The plots show that, consistent with the comparison of the activity estimate data to noon report data, quality deteriorates between the earlier years (2007, 2008 and 2009) and later years (2010, 2011 and 2012). The availability of noon report data in the earlier years is also limited, which makes a rigorous quality assurance difficult. However, even with the sample sizes available the confidence bounds clearly indicate that the quality deteriorates.

Table 2525 summarises the findings from the quality assurance analysis of the fuel consumption. Further data from earlier years can be found in Annex 3.

**Table 25 Summary of the findings on the QA of the bottom-up method estimated fuel consumption using noon report.**

| Consumer         | Quality, as assessed using noon report data  | Importance to the inventory of fuel consumption and emissions |
|------------------|--|---|
| Main engine      | Good – consistent agreement and close confidence bounds to the best fit                                      | High (71% of total fuel in 2012)                              |
| Auxiliary engine | Poor – moderate, with some ships showing good agreement but many anomalies (very low values in noon reports) | Low (25% of total fuel in 2012)                               |
| Boilers          | Unassessed   | Very low (3.7% of total fuel in 2012)                         |



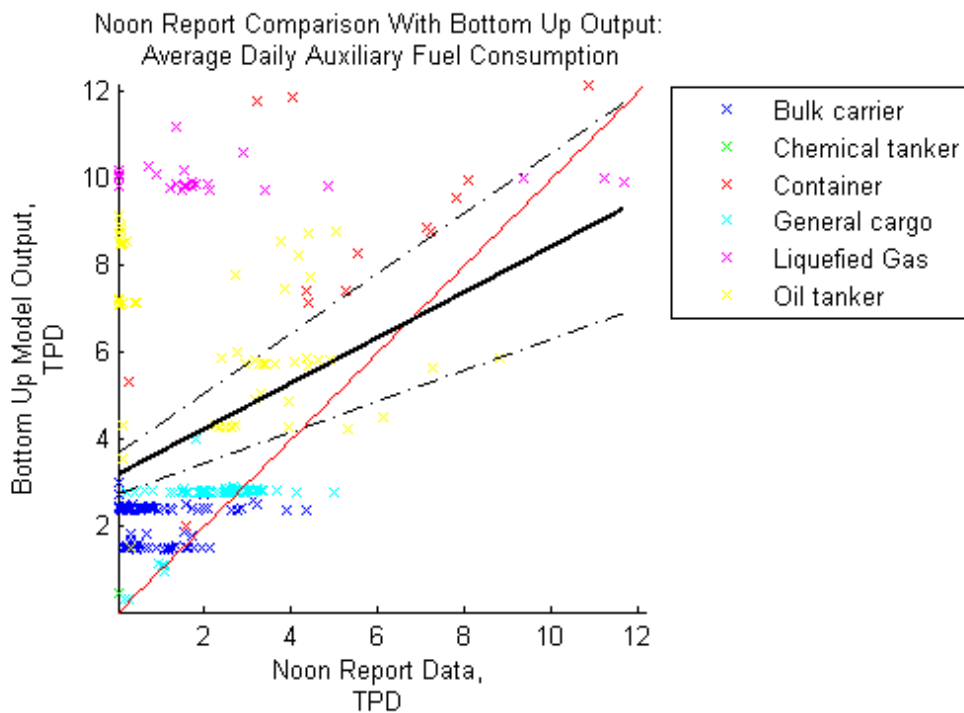
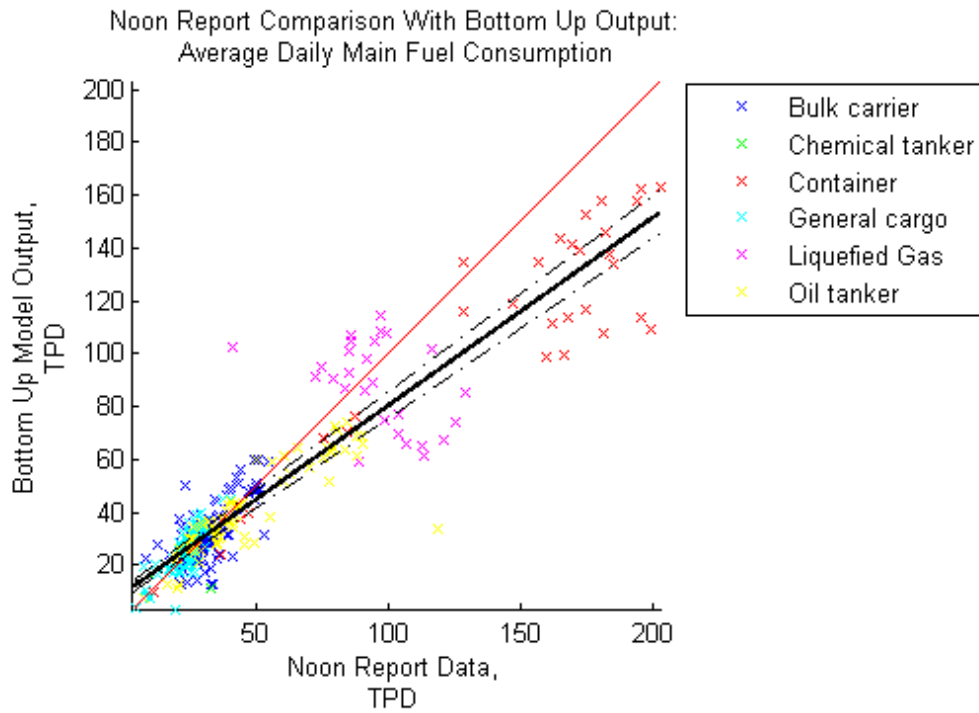


Figure 54 Average noon-reported daily fuel consumption of the main and auxiliary engine, compared with the bottom-up estimate over each quarter of 2012.

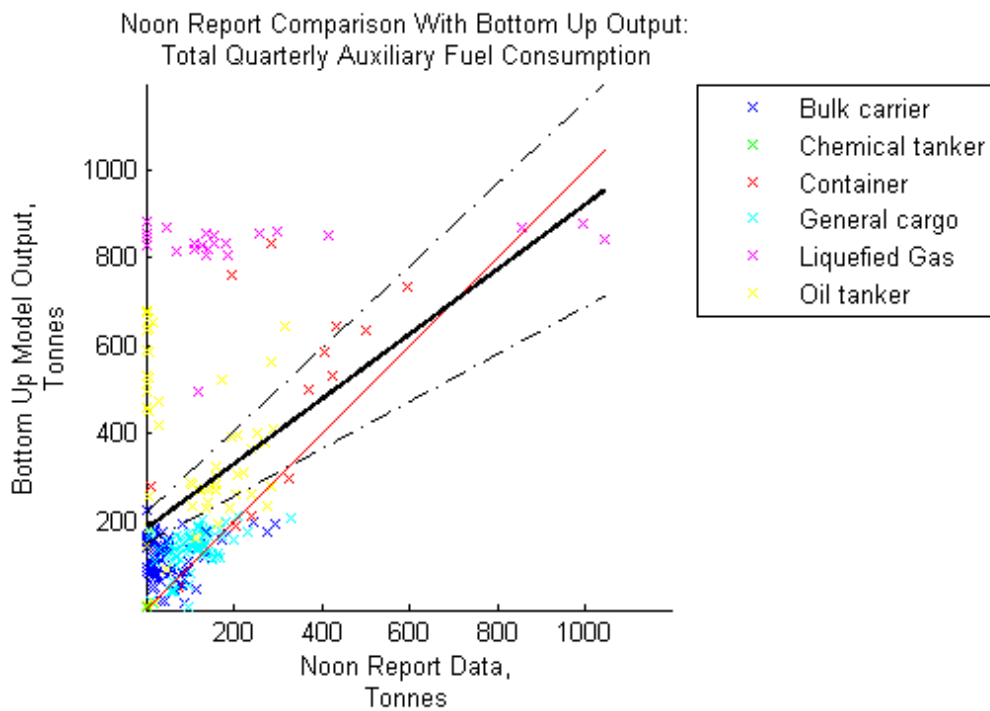
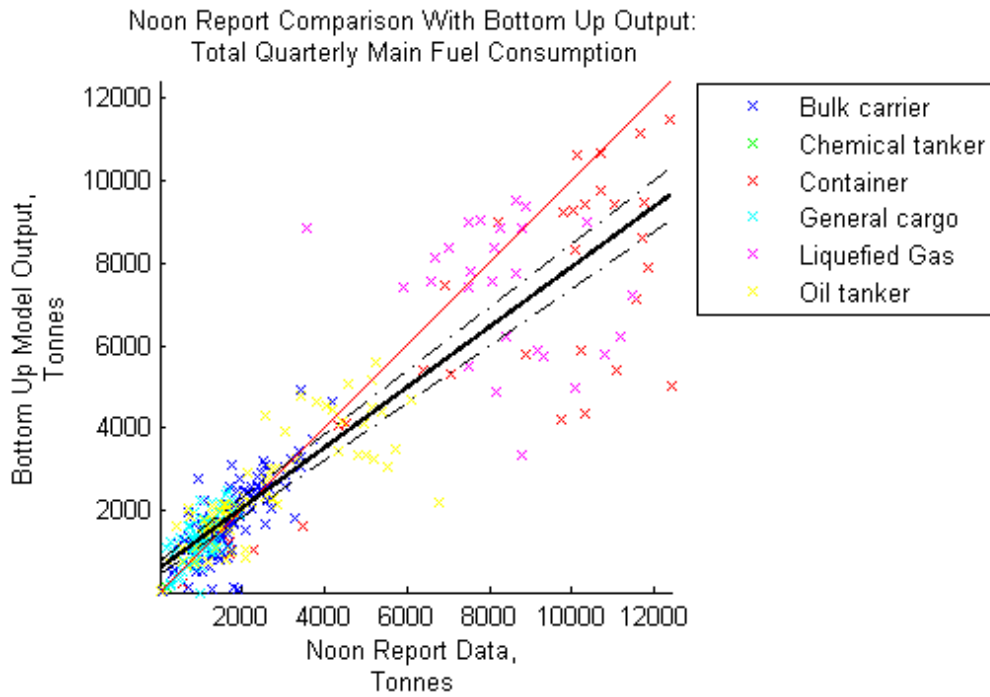


Figure 55 Total noon-reported quarterly fuel consumption of the main and auxiliary engine, compared with the bottom-up estimate over each quarter of 2012.

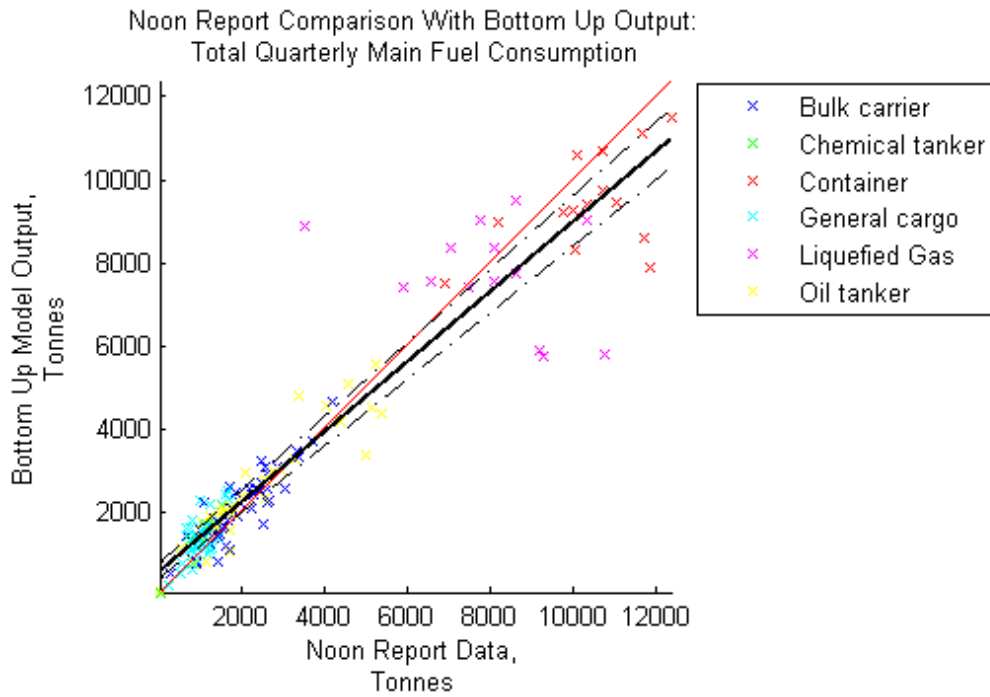


Figure 56 Total noon-reported quarterly fuel consumption of the main engine, compared with the bottom-up estimate over each quarter of 2012, with a filter to select only days with high reliability observations of the ship for 75% of the time or more.


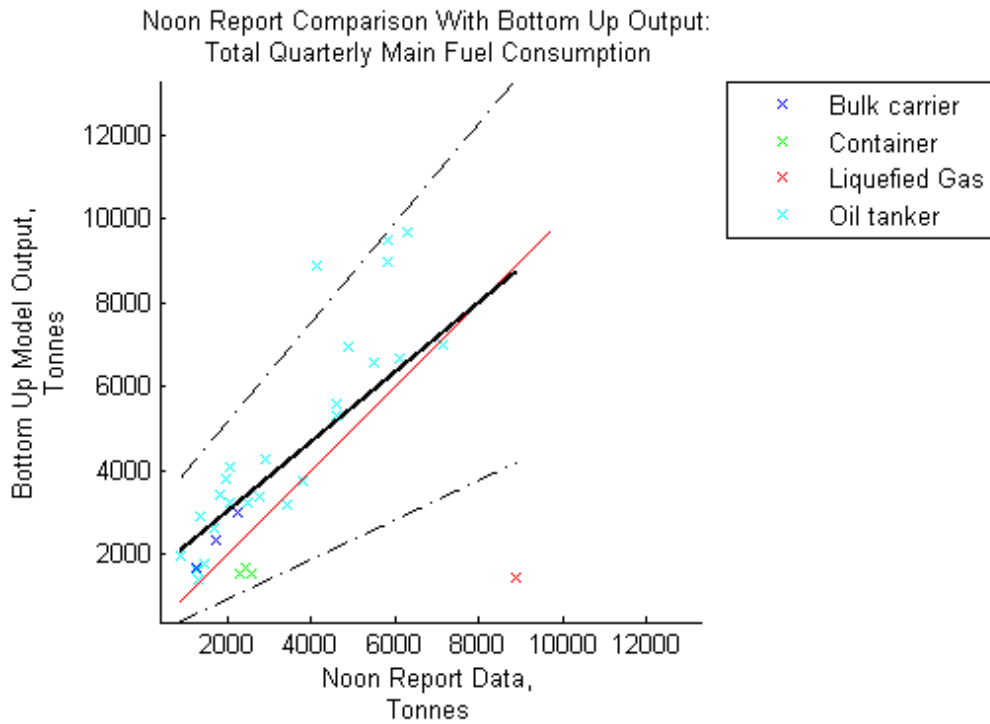


Figure 57 Total noon-reported quarterly fuel consumption of the main engine, compared with the bottom-up estimate over each quarter of 2007.

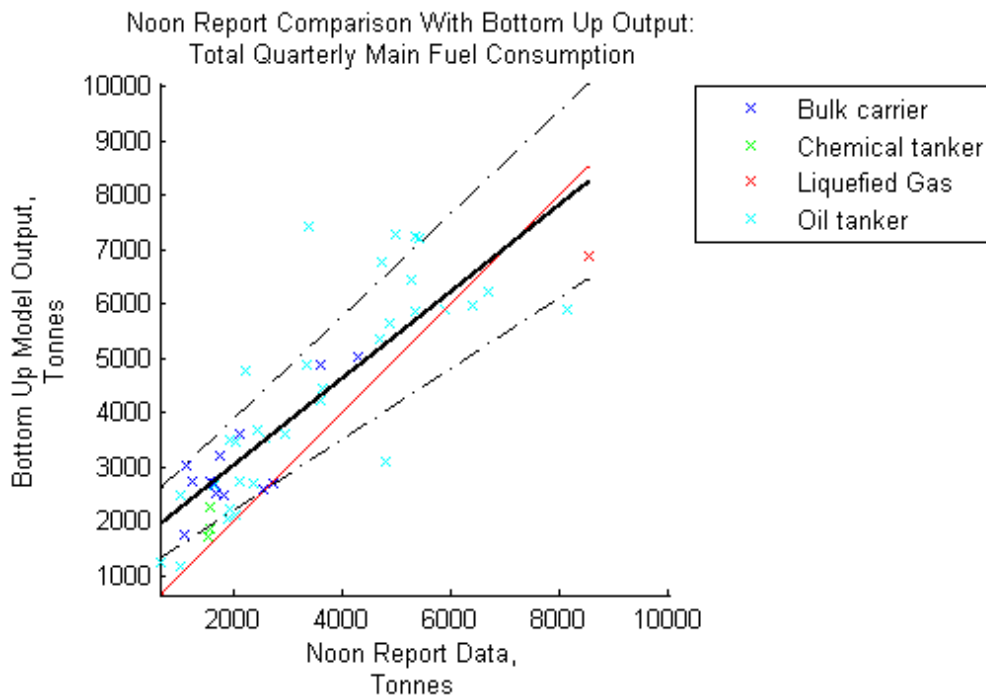

**Figure 58 Total noon-reported quarterly fuel consumption of the main engine, compared with the bottom-up estimate over each quarter of 2009.**

**Coverage statistics and fleet size quality assurance**

The total emissions for each fleet (and the sum of emissions of all fleets) are found from:

- the emissions of any ships observed on AIS, during the period of observation;
- extrapolation to cover periods of time when the observed ships are not currently under observation by AIS;
- estimation for ships that are deemed 'active' in the IHSF database but are not observed on AIS at all.

The maximum reliability of the inventory is achieved if all the ships are observed all the time, as demonstrated by the main engine comparison in Figure 56. However, the reality is that AIS coverage is not perfect. The statistics of coverage by AIS therefore provide important insight into the quality of the estimate and the quantity of emissions calculated directly versus the quantity of data calculated from imputed and extrapolated estimates of activity. This section examines the quality of the AIS data coverage of the fleets of international, domestic and fishing ships by answering two questions:

- How many of the in-service ships are observed in the AIS dataset?
- Of the ships that are observed, what is the duration of the observation period?

The number of in-service ships observed in the AIS dataset

Table 26 describes the size of the fleet in the IHSF database in each year with the percentage of the total fleet classified as in-service and of those ships, the percentage that also appears in the AIS database.

Transport ships are ships that carry goods and people (all merchant shipping, ferries and cruise ships); non-transport ships include service vessels, workboats, yachts and fishing vessels.

**Table 26 Observed, unobserved and active ship counts (2007–2012).**

| Year | Transport ships |              |                                       | Non-transport ships |              |                                       |
|------|-----------------|--------------|---------------------------------------|---------------------|--------------|---------------------------------------|
|      | Total           | % in-service | % of in-service ships observed on AIS | Total               | % in-service | % of in-service ships observed on AIS |
| 2007 | 58074           | 89%          | 62%                                   | 49396               | 99%          | 19%                                   |
| 2008 | 59541           | 89%          | 66%                                   | 50704               | 98%          | 24%                                   |
| 2009 | 61065           | 90%          | 69%                                   | 50872               | 100%         | 29%                                   |
| 2010 | 69431           | 83%          | 68%                                   | 52941               | 98%          | 31%                                   |
| 2011 | 72462           | 75%          | 69%                                   | 51961               | 96%          | 32%                                   |
| 2012 | 60670           | 93%          | 76%                                   | 54077               | 96%          | 42%                                   |

There is a large discrepancy between the number of AIS observed and in-service ships, with fewer in-service ships appearing on AIS than would be expected. This discrepancy is a lot greater for non-transport ships but still significant for transport ships. Explanations for this discrepancy include:

- a large number of ships classified as in-service were not actually so;
- the AIS transponders of in-service ships were not turned on during the year or were faulty/sending spurious signals;
- ships were out of range of any AIS receiving equipment (shore-based or satellite).

In the earlier years (2007, 2008, 2009) the maps of AIS coverage shown in Annex 3 demonstrate that the third explanation (out of range) is plausible for the shortfall in those years. However, the consistency in the shortfall between the number of observed ships and the in-service ships across the years (particularly from 2010 onwards, when satellite AIS data are available) does not support this as the only explanation.

Table 27 lists the statistics for four ship types, bulk carriers, container ships, general cargo ships and oil tankers. For these fleets, which account for the majority of shipping emissions, the percentage of in-service ships that also appear in AIS is generally excellent (90–100%), although there are some notable exceptions. Only 50% or less of the smallest size category of oil tankers, bulk carriers and general cargo ships are observed on AIS, regardless of the year and the quality of AIS coverage.

This implies that the quality of the AIS coverage for the ships most important to the inventory is good, but that there are shortcomings in the quality of either the AIS coverage or of the IHSF database for the smallest ship size categories. Even as the geographical coverage of the AIS database increases over time, there are many ship types and sizes for which the percentage of in-service ships observed in AIS reduces over time (this is particularly true of the larger container ships and bulk carriers). This trend is indicative of deterioration in the quality of the IHSF status indicator since 2007, 2008 and 2009.

### **The average duration period for ships that are observed**

Table 27 also describes the percentage of the year for which there is a reliable estimate of activity for ships observed on AIS. (The method and judgement of reliability are described in detail in Annex 3.) Consistent with the switch from solely shore-based AIS

in 2007, 2008 and 2009 to shore-based and satellite AIS in the later years, there is a substantial increase over the period of this study in the percentage of the year for which a ship can be reliably observed from its AIS transmissions. Many of the smaller ship categories are well observed even in the early years of this study, which is indicative of the ships being operated in coastal areas of land masses where there was good shore-based AIS reception (e.g. particularly Europe and North America).

A composite of the number of ships observed and the duration for which they are observed can be found by taking the product of the two statistics in Table 27:

$$\% \text{ total in-service coverage} = \% \text{ in-service ships on AIS} \times \% \text{ of the year for which they are observed.}$$

Figure 59 displays the trend over time of the percentage of total in-service coverage for four of the fleets sampled in Table 27. As expected from the increased geographic coverage of AIS data with time, the total in-service coverage increases. In 2012, the average in-service large container or bulk carrier can be reliably observed in the AIS dataset assembled by this consortium for nearly 70% of the time. Coverage of the largest bulk carriers nearly tripled between 2010 and 2012, showing that rapid improvements have been observed during the period of this study. The trend for the smaller ship types is for increased coverage but the average total in-service coverage remains 40% and lower for the smallest general cargo carriers and bulk carriers.

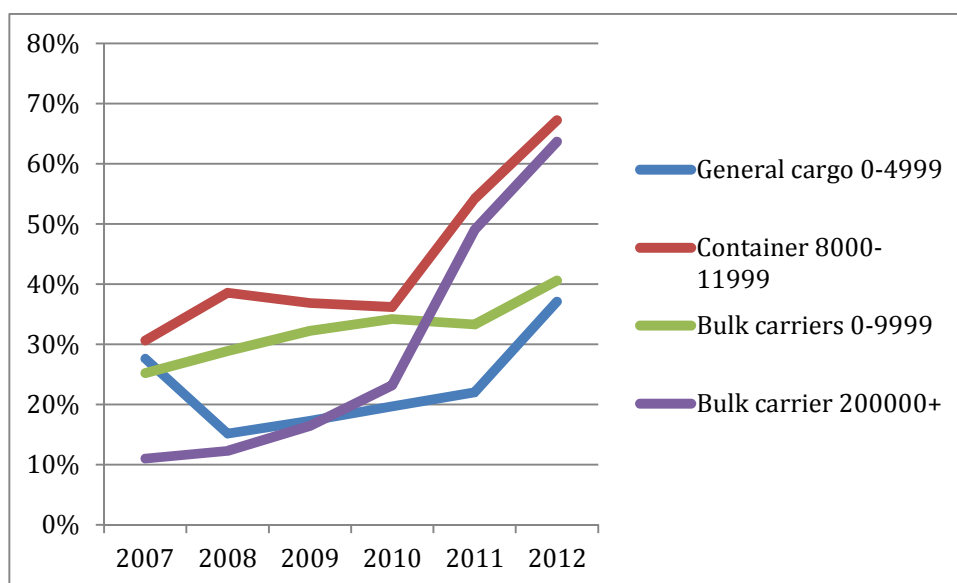


Figure 59 Total % in-service time for which high-reliability activity estimates are available from AIS.

However, for the purposes of a high-quality inventory, it is more important for the quality of the AIS coverage for the ship types and sizes with the greatest share of emissions to be high. Since the coverage statistics of the highest contributing CO<sub>2</sub> emitters (i.e. the largest ship types and sizes) are also the highest, this is generally the case. Figure 60 displays the CO<sub>2</sub> emissions weighted average of the percentage of total in-service coverage. This is decomposed into two categories: i) ships classified as international shipping (see Section 1.2) and ii) ships classified as domestic and fishing. The subject of the inventories in Section 1.3, international shipping, has significantly higher coverage quality than the domestic and fishing fleet.

In Section 1.4, where the days at sea estimate from LRIT is compared with the estimate obtained from AIS, there is a significant improvement in quality for the AIS-derived

activity estimates when reliable coverage exceeds 50% of the year. When this finding is placed in the context of the coverage statistics described in this section, it can be seen that in 2011 and 2012, the coverage statistics lead to high-quality activity and therefore inventory estimates. However in the earlier years of this study, the comparatively lower coverage statistics will, relative to the later years, increase the uncertainty of the estimated inventories.

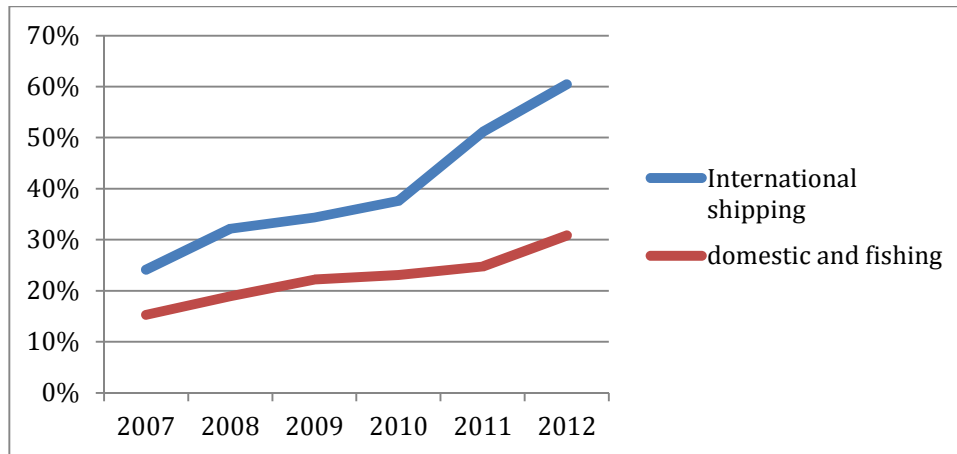


Figure 60 Emissions weighted average of the total % of in-service time for which high-reliability activity estimates are available from AIS.

Table 27 Statistics of the number of in-service ships observed on AIS and of the average amount of time during the year for which a ship is observed.

| Typename      | Sizename      | % of in-service ships observed in AIS |      |      |      |      |      | % of year for which high reliability activity estimates available |      |      |      |      |      |
|---------------|---------------|---------------------------------------|------|------|------|------|------|---|------|------|------|------|------|
|               |               | 2007                                  | 2008 | 2009 | 2010 | 2011 | 2012 | 2007  | 2008 | 2009 | 2010 | 2011 | 2012 |
| Bulk carrier  | 0–9999        | 34%                                   | 41%  | 45%  | 50%  | 47%  | 55%  | 75%   | 71%  | 72%  | 68%  | 71%  | 74%  |
| Bulk carrier  | 10000–34999   | 91%                                   | 92%  | 91%  | 89%  | 86%  | 92%  | 23%   | 26%  | 31%  | 38%  | 56%  | 65%  |
| Bulk carrier  | 35000–59999   | 97%                                   | 96%  | 97%  | 96%  | 91%  | 95%  | 17%   | 20%  | 22%  | 28%  | 52%  | 65%  |
| Bulk carrier  | 60000–99999   | 99%                                   | 99%  | 98%  | 98%  | 93%  | 95%  | 14%   | 16%  | 19%  | 24%  | 51%  | 65%  |
| Bulk carrier  | 100000–199999 | 99%                                   | 99%  | 99%  | 99%  | 93%  | 94%  | 10%   | 14%  | 18%  | 28%  | 51%  | 63%  |
| Bulk carrier  | 200000+       | 98%                                   | 99%  | 99%  | 100% | 95%  | 93%  | 11%   | 12%  | 17%  | 23%  | 52%  | 68%  |
| Container     | 0–999         | 89%                                   | 90%  | 90%  | 84%  | 82%  | 88%  | 42%   | 45%  | 49%  | 49%  | 62%  | 70%  |
| Container     | 1000–1999     | 99%                                   | 98%  | 99%  | 96%  | 92%  | 98%  | 21%   | 30%  | 36%  | 36%  | 56%  | 65%  |
| Container     | 2000–2999     | 99%                                   | 98%  | 99%  | 96%  | 92%  | 96%  | 20%   | 26%  | 29%  | 36%  | 63%  | 66%  |
| Container     | 3000–4999     | 99%                                   | 98%  | 99%  | 97%  | 92%  | 95%  | 23%   | 28%  | 28%  | 35%  | 63%  | 70%  |
| Container     | 5000–7999     | 99%                                   | 98%  | 99%  | 100% | 95%  | 96%  | 27%   | 33%  | 30%  | 32%  | 59%  | 70%  |
| Container     | 8000–11999    | 100%                                  | 100% | 99%  | 100% | 91%  | 98%  | 31%   | 39%  | 37%  | 36%  | 60%  | 68%  |
| Container     | 12000–14500   | 100%                                  | 100% | 100% | 97%  | 94%  | 95%  | 56%   | 34%  | 38%  | 68%  | 65%  | 81%  |
| Container     | 14500+        | –                                     | –    | –    | –    | –    | 88%  | –   | –    | –    | –    | –    | 71%  |
| General cargo | 0–4999        | 38%                                   | 41%  | 42%  | 40%  | 39%  | 44%  | 72%   | 37%  | 41%  | 49%  | 56%  | 83%  |
| General cargo | 5000–9999     | 81%                                   | 83%  | 83%  | 79%  | 77%  | 86%  | 34%   | 29%  | 34%  | 43%  | 55%  | 64%  |
| General cargo | 10000+        | 87%                                   | 89%  | 89%  | 84%  | 84%  | 90%  | 28%   | 43%  | 48%  | 48%  | 58%  | 66%  |
| Oil tanker    | 0–4999        | 24%                                   | 30%  | 34%  | 37%  | 38%  | 43%  | 84%   | 53%  | 55%  | 46%  | 55%  | 81%  |
| Oil tanker    | 5000–9999     | 62%                                   | 70%  | 73%  | 78%  | 78%  | 87%  | 56%   | 45%  | 47%  | 43%  | 52%  | 59%  |
| Oil tanker    | 10000–19999   | 74%                                   | 78%  | 81%  | 77%  | 80%  | 90%  | 44%   | 30%  | 33%  | 38%  | 52%  | 58%  |
| Oil tanker    | 20000–59999   | 91%                                   | 93%  | 93%  | 91%  | 91%  | 95%  | 29%   | 29%  | 33%  | 34%  | 55%  | 61%  |
| Oil tanker    | 60000–79999   | 95%                                   | 95%  | 95%  | 96%  | 90%  | 97%  | 27%   | 28%  | 35%  | 40%  | 52%  | 64%  |
| Oil tanker    | 80000–119999  | 97%                                   | 98%  | 98%  | 97%  | 91%  | 97%  | 26%   | 21%  | 25%  | 37%  | 60%  | 59%  |
| Oil tanker    | 120000–199999 | 98%                                   | 98%  | 98%  | 97%  | 91%  | 95%  | 19%   | 18%  | 21%  | 21%  | 36%  | 65%  |
| Oil tanker    | 200000+       | 99%                                   | 99%  | 99%  | 95%  | 95%  | 96%  | 16%   | 91%  | 92%  | 94%  | 91%  | 47%  |




#### 1.4.4. Comparison of top-down and bottom-up inventories

Four main comparators are essential to understanding the similarities, differences and joint insights that derive from the top-down and bottom-up inventories:

1. estimates of fuel totals (in million tonnes);
2. allocation of fuel totals by fuel type (residual, distillate and natural gas, or HFO, MDO, LNG as termed in this study);
3. estimates of CO<sub>2</sub> totals (in million tonnes), which depend in part upon the allocation of different fuel types with somewhat different carbon contents;
4. allocation of fuel totals as international and not international (e.g., domestic and fishing).

Based on the results presented in Sections 1.1.3 and 1.3.2, there is a clear difference between the best estimates of the top-down and bottom-up methods. This difference has been documented in the scientific peer-reviewed literature and in previous IMO reports. This study finds that the best estimates of fuel consumption differ by varying quantities across the years studied. Smaller differences between top-down and bottom-up total fuel consumption are observed after the availability of better AIS coverage in 2010. However, in all cases, the activity-based bottom-up results for all fuels are generally greater than the top-down statistics.

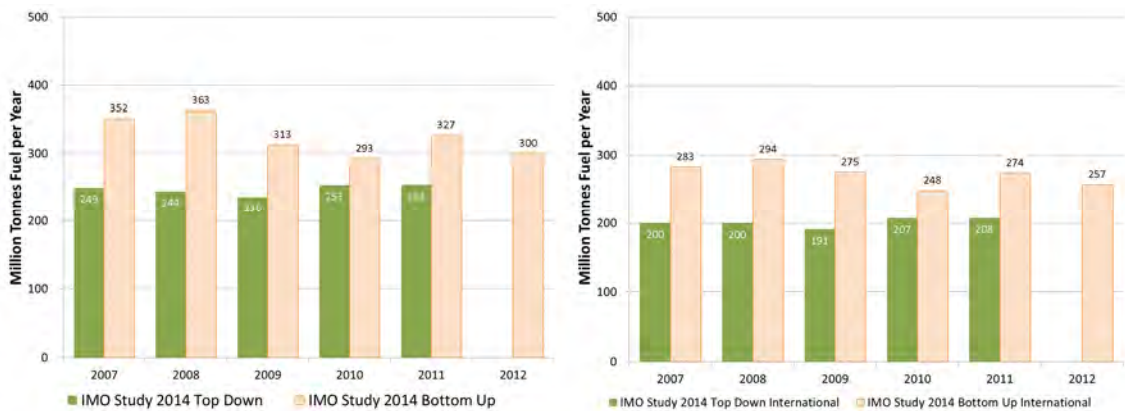


a. All marine fuels

b. International shipping


Figure 61 Top-down and bottom-up comparison for a) all marine fuels and b) international shipping.

Allocation of fuel inventories by fuel type is important and comparison of top-down allocations with initial bottom-up fuel-type results provided important QA/QC that helped reconcile bottom-up fuel type allocation.


The fuel split between residual (HFO) and distillate (MDO) for the top-down approach is explicit in the fuel sales statistics from the IEA. However, the HFO/MDO allocation for the bottom-up inventory could not be finalised without consideration of top-down sales insights. This is because the engine-specific data available through IHSF are too sparse, incomplete or ambiguous with respect to fuel type for large numbers of main engines and nearly all auxiliary engines on vessels. QA/QC analysis with regard to fuel type assignment in the bottom-up model was performed using top-down statistics as a guide together with fuel allocation information from the IMO GHG Study 2009. This iteration was important in order to finalise the QA/QC on fuel-determined pollutant emissions (primarily SO<sub>x</sub> and PM), and results in slight QA/QC adjustments for other emissions. Figure 62 presents a side-by-side comparison of top-down, initial and final bottom-up approaches to fuel type allocations.

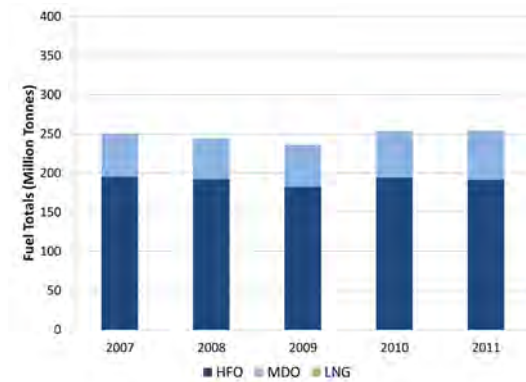

a. Top-down fuel-type allocation

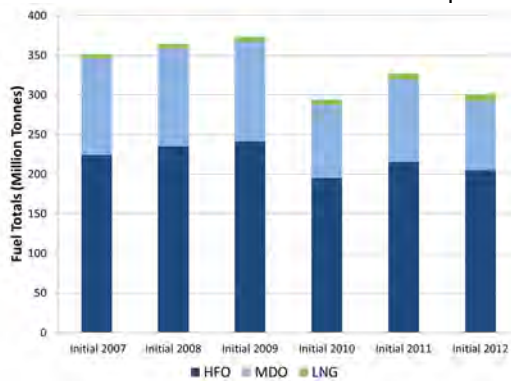

b. Initial bottom-up allocation

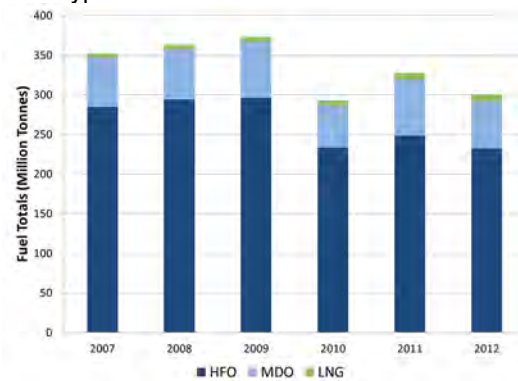

c. Updated bottom-up allocation

Figure 62 Comparison of top-down fuel allocation with initial and updated bottom-up fuel allocation (2007–2012).

Figure 62a and c shows that relative volumes of residual to distillate marine fuel (HFO to MDO) are similar. This is because the updated allocation in the bottom-up inventory is constrained to replicate the reported IEA fuel sales ratios. The year-on-year allocations are also constrained by bottom-up analysis that identifies vessel categories with engines likely to use distillate fuel. A further constraint is that an MDO assignment applied to a vessel category in any year requires that MDO be assigned to that category in every year.

The CO<sub>2</sub> comparison corresponds closely to the total fuel values, with the exception of the LNG consumption identified in the bottom-up inventory. The IEA statistics report zero international marine bunkers of natural gas (LNG), as shown in Table 9 in Section 1.1.3. Trends in CO<sub>2</sub> emissions are nearly identical with total fuel estimates, with negligible modification by the fuel-type allocation. Trends in the top-down inventory suggest a low-growth trend in energy use by ships during the period 2007–2012. This is consistent with known adaptations and innovations in the international shipping fleet to conserve fuel during a period of increasing energy prices and global recession.

Table 28 international, domestic and fishing CO<sub>2</sub> emissions 2007–2011, using top-down method.

| Marine sector                | Fuel type | 2007  | 2008  | 2009  | 2010  | 2011  |
|------------------------------|-----------|-------|-------|-------|-------|-------|
| International shipping       | HFO       | 542.1 | 551.2 | 516.6 | 557.1 | 554.0 |
|                              | MDO       | 83.4  | 72.8  | 79.8  | 90.4  | 94.9  |
|                              | NG        | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| Top-down international total | All       | 625.5 | 624.0 | 596.4 | 647.5 | 648.9 |
| Domestic navigation          | HFO       | 62.0  | 44.2  | 47.6  | 44.5  | 39.5  |
|                              | MDO       | 72.8  | 76.6  | 75.7  | 82.4  | 87.8  |
|                              | NG        | 0.1   | 0.1   | 0.1   | 0.1   | 0.2   |
| Top-down domestic total      | All       | 134.9 | 121.0 | 123.4 | 127.1 | 127.6 |
| Fishing                      | HFO       | 3.4   | 3.4   | 3.1   | 2.5   | 2.5   |
|                              | MDO       | 17.3  | 15.7  | 16.0  | 16.7  | 16.4  |
|                              | NG        | 0.1   | 0.1   | 0.1   | 0.1   | 0.1   |
| Top-down fishing total       | All       | 20.8  | 19.2  | 19.3  | 19.2  | 19.0  |
| <b>All fuels top-down</b>    |           | 781.2 | 764.1 | 739.1 | 793.8 | 795.4 |

Table 29 international, domestic and fishing CO<sub>2</sub> emissions 2007–2012, using bottom-up method.

| Marine sector                 | Fuel type | 2007    | 2008    | 2009  | 2010  | 2011    | 2012  |
|-------------------------------|-----------|---------|---------|-------|-------|---------|-------|
| International shipping        | HFO       | 773.8   | 802.7   | 736.6 | 650.6 | 716.9   | 667.9 |
|                               | MDO       | 97.2    | 102.9   | 104.2 | 102.2 | 109.8   | 105.2 |
|                               | NG        | 13.9    | 15.4    | 14.2  | 18.6  | 22.8    | 22.6  |
| Bottom-up international total | All       | 884.9   | 920.9   | 855.1 | 771.4 | 849.5   | 795.7 |
| Domestic navigation           | HFO       | 53.8    | 57.4    | 32.5  | 45.1  | 61.7    | 39.9  |
|                               | MDO       | 142.7   | 138.8   | 80.1  | 88.2  | 98.1    | 91.6  |
|                               | NG        | 0       | 0       | 0     | 0     | 0       | 0     |
| Bottom-up domestic total      | All       | 196.5   | 196.2   | 112.6 | 133.3 | 159.7   | 131.4 |
| Fishing                       | HFO       | 1.6     | 1.5     | 0.9   | 0.8   | 1.4     | 1.1   |
|                               | MDO       | 17.0    | 16.4    | 9.3   | 9.2   | 10.9    | 9.9   |
|                               | NG        | 0       | 0       | 0     | 0     | 0       | 0     |
| Bottom-up fishing total       | All       | 18.6    | 18.0    | 10.2  | 10.0  | 12.3    | 11.0  |
| <b>All fuels bottom-up</b>    |           | 1,100.1 | 1,135.1 | 977.9 | 914.7 | 1,021.6 | 938.1 |

Across the set of years 2007–2012, CO<sub>2</sub> emissions from international shipping range between approximately 740 and 795 million tonnes, according to top-down methods, and between approximately 900 and 1135 million tonnes, according to bottom-up methods. The trend in top-down totals is generally flat or slightly increasing since the low-point of the recession in 2009; the trend in bottom-up totals can be interpreted as generally flat (since 2010 at least, when AIS data coverage became consistently global).

### Domestic navigation and fishing

The top-down results are explicit in distinguishing fuel delivered to international shipping, domestic navigation or fishing. (Potential uncertainty in this explicit classification is discussed in Section 1.6.). Bottom-up methods do not immediately identify international shipping, so the consortium considered ways to deduct domestic navigation or fishing fuel from the total fuel estimates. For example, bottom-up results allow for categorical identification of fishing fuel by virtue of ship type.

For domestic navigation and fishing, some categories of vessel presumably would be devoted mainly to domestic navigation service, according to allocation method 2 in Section 1.2.8. To evaluate the quality of this method, the consortium visually inspected AIS plots of service vessels, passenger ferries, Ro-Pax ferries and other vessel types without respect to vessel size. The intensity of AIS reporting revealed generally local operations for service vessels, as expected. Service vessels were observed operating in international waters, but their patterns strongly conformed to EEZ boundaries as a rule. These were interpreted as non-transport services that would result in a domestic-port-to-domestic-port voyage with offshore service to domestic platforms for energy exploration, extraction, scientific missions, etc. Similar behaviour was observed for offshore vessels and miscellaneous vessel categories (other than fishing). Passenger cruise ships exhibited much more international voyage behaviour than passenger ferries (with some exceptions attributed to larger ferries); similar observations were made after visualising Ro-Pax vessel patterns. Moreover, no dominant patterns of local operations for bulk cargo ships, container ships or tankers were identified.

The consortium mapped the set of AIS-observed but unidentified vessels and observed that these vessels generally (but not exclusively) operate in local areas. This led to an investigation of the available message data in these AIS observations. It was possible to evaluate the MMSI numbers that were unmatched with IHSF vessel information, at least according to the MMSI code convention. A count of unique MMSI numbers was made for each year and associated with its region code; only vessel identifiers were included.

Europe, Asia and North America were the top regions with unknown vessels, accounting for more than 85% of the unmatched MMSI numbers on average across 2007–2012 (approximately 36%, 30%, and 21%, respectively). Oceania, Africa and South America each accounted for approximately 6%, 5%, and 3%, respectively. To evaluate whether these vessel operations might qualify as domestic navigation, the top-down domestic fuel sales statistics from the IEA were classified according to these regions and the pattern of MMSI counts was confirmed as mostly correlated with domestic marine bunker sales. This is illustrated in Table 30, which shows that correlations in all but one year were greater than 50%. This evidence allows for a designation of these vessels as mostly in domestic service, although it is not conclusive.

**Table 30 Summary of average domestic tonnes of fuel consumption per year (2007–2012), MMSI counts and correlations between domestic fuel use statistics.**

| Row labels                                       | Correlations:<br>Domestic fuel<br>consumption,<br>tonnes per<br>year | 0.87         | 0.56          | 0.66         | 0.13          | 0.66          | 0.87          |
|--|--|--------------|---------------|--------------|---------------|---------------|---------------|
|  |  | 2007<br>MMSI | 2008<br>MMSI  | 2009<br>MMSI | 2010<br>MMSI  | 2011<br>MMSI  | 2012<br>MMSI  |
| Africa   | 430  | 4457         | 7399          | 2501         | 3336          | 10801         | 13419         |
| Asia   | 9,900  | 18226        | 23588         | 15950        | 12530         | 82198         | 112858        |
| Europe   | 3,000  | 13856        | 23368         | 20972        | 75331         | 94379         | 88286         |
| North and<br>Central<br>America and<br>Caribbean | 4,800  | 14100        | 48261         | 16104        | 22590         | 26878         | 55835         |
| Oceania  | 430  | 3903         | 7188          | 4135         | 5200          | 13889         | 21320         |
| South America                                    | 1,300  | 1023         | 2583          | 1939         | 1842          | 6808          | 9532          |
| <b>Grand total</b>                               | <b>19,900</b>  | <b>55565</b> | <b>112387</b> | <b>8301</b>  | <b>120829</b> | <b>234953</b> | <b>301250</b> |

## 1.5. Analysis of the uncertainty of the top-down and bottom-up CO<sub>2</sub> inventories

Section 1.5 requires an analysis of the uncertainties in the emission estimates to provide the IMO with reliable and up-to-date information on which to base its decisions. Uncertainties are associated with the accuracy of top-down fuel statistics and with the emissions calculations derived from marine fuel sales statistics. Uncertainties also exist in the bottom-up calculations of energy use and emissions from the world fleet of ships. These uncertainties can affect the totals, the distributions among vessel categories and the allocation of emissions between international and domestic shipping.

### 1.5.1. Top-down inventory uncertainty analysis

An overview of the two-fold approach applied to top-down statistics and emissions estimates is provided. A full description of this approach is given in Annex 4. First, this work builds upon the QA/QC findings that suggest sources of uncertainty in fuel statistics relate to data quality and work to quantify the bounding impacts of these. Second, this analysis quantifies uncertainties associated with emissions factors used to estimate GHGs using top-down statistics.

**Table 31 Upper range of top-down fuel consumption, by vessel type (million tonnes).**


| Fuel type | 2007 | 2008 | 2009 | 2010 | 2011 |
|-----------|------|------|------|------|------|
| MDO       | 71   | 73   | 77   | 64   | 73   |
| HFO       | 258  | 258  | 245  | 256  | 244  |
| All fuels | 329  | 331  | 321  | 319  | 318  |
| Fuel type | 2007 | 2008 | 2009 | 2010 | 2011 |
| MDO       | 22%  | 22%  | 24%  | 20%  | 23%  |
| HFO       | 78%  | 78%  | 76%  | 80%  | 77%  |
| All fuels | 100% | 100% | 100% | 100% | 100% |

The IMO GHG Study 2014 acknowledges that additional uncertainty about marine fuel sales to consumers is not identified in the IEA data and cannot be quantified. For example, some ships that purchase fuel (probably domestic and almost certainly MDO) are identified by the IEA as ‘transport sector.’ This includes fuel purchased in places that might not be counted as ‘marine bunkers’ (e.g. leisure ports and marinas). The quantities of fuel sold to boats in a global context appear to be small compared to the volumes reported as bunker sales but this cannot be evaluated quantitatively. Given that these sales are all domestic, the additional uncertainty does not affect estimates of international shipping fuel use. However, uncertainty in the HFO/MDO allocation may be slightly affected but remains unquantified; again, this analysis suggests such fuel allocation uncertainty appears to be small.

Export-import discrepancy represents the primary source of uncertainty, as measured by the quantity of adjustment that is supported by our analysis. This discrepancy exists because the total fuel volumes reported as exports exceeds the total fuel volumes reported as imports. Evidence associating the export-import discrepancy with marine fuels includes the known but unquantified potential to misallocate bunker fuel sales as exports, as documented above. The magnitude of this error increased during the period of globalisation, particularly since the 1980s. In fact, the percentage adjustment due to export-import allocation uncertainty has never been lower than 22% since 1982, as discussed in Annex 4. Table 34 and Figure 63 illustrate the top-down adjustment for the years 2007–2011. During these years, the average adjustment due to export-import allocation uncertainty averaged 28%.

**Table 32 Results of quantitative uncertainty analysis on top-down statistics (million tonnes).**

| <b>Marine sector</b>                          | <b>2007</b>  | <b>2008</b>  | <b>2009</b>  | <b>2010</b>  | <b>2011</b>  |
|---|--------------|--------------|--------------|--------------|--------------|
| Total marine fuel consumption (reported)      | 249.2        | 243.7        | 235.9        | 253.0        | 253.5        |
| Adjustment for export-import discrepancy      | 71.5         | 79.4         | 78.0         | 59.0         | 56.0         |
| Adjustment for fuel transfers balance         | 8.1          | 8.1          | 7.5          | 7.5          | 8.2          |
| <b>Adjusted Top-Down Marine Fuel Estimate</b> | <b>329.8</b> | <b>331.2</b> | <b>321.4</b> | <b>319.5</b> | <b>317.7</b> |

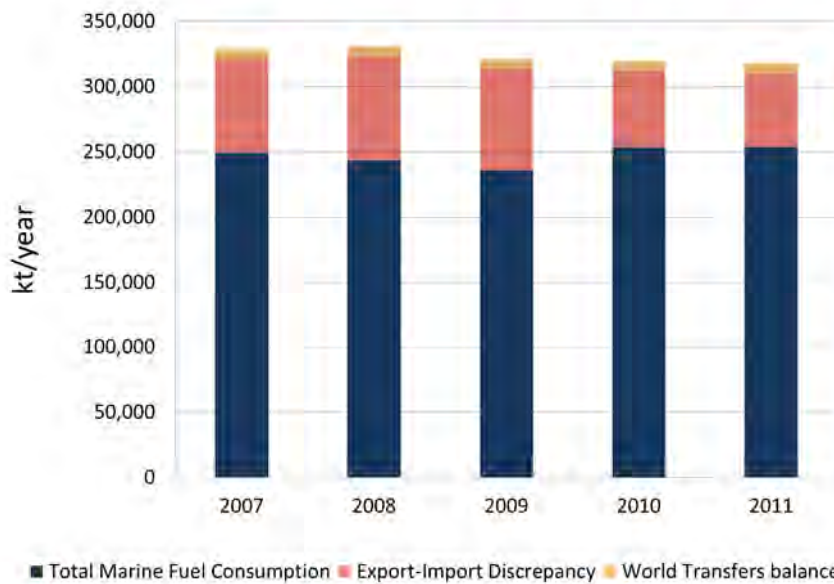

**Figure 63 Adjusted marine fuel sales based on quantitative uncertainty results (2007–2011).**


### 1.5.2. Bottom-up inventory uncertainty analysis

Bottom-up uncertainty in this study is conditioned on the quality control of information for specific vessels, application of known variability in vessel activity to observed vessels within similar ship type and size fleets and the way in which activity assumptions are applied to unobserved vessels within similar ship type and size fleets. In other words, the quantification of uncertainty is linked to the quality control section of this report. One of the most important contributions of this study in reducing uncertainty is the explicit quality control to calculate fuel use and emissions using specific vessel technical details; this directly accounts for variability within a fleet bin, replacing the average technical parameters with uncertainty in the IMO GHG Study 2009 calculations. Another important contribution to reducing uncertainty is the direct observation of activity data for individual vessels, i.e. speed and draught aggregated hourly, then annually.

Figure 64 presents the uncertainty ranges around the top-down and bottom-up fuel totals for the years studied. The vertical bars attached to the total fuel consumption estimate for each year and each method represents uncertainty. This study estimates higher uncertainty in the bottom-up method in the earlier years (2007, 2008 and 2009), with the difference between these uncertainty estimates being predominantly attributable to the change in AIS coverage over the period of the study. The uncertainty in the earlier years is dominated by uncertainty in the activity data, due to the lack of satellite AIS data. In later years (2010, 2011, 2012), this uncertainty has reduced, but the discrepancy between the number of ships identified as in-service in IHSF and the ships observed on AIS increases

(relative to the earlier years. The result is that the total bottom-up uncertainty only reduces slightly in the later years when improved AIS data is available.

The top-down estimates are also uncertain, and include observed discrepancies between global imports and exports of fuel oil and distillate oil, observed transfer discrepancies among fuel products that can be blended into marine fuels and the potential for misallocation of fuels between sectors of shipping (international, domestic and fishing).

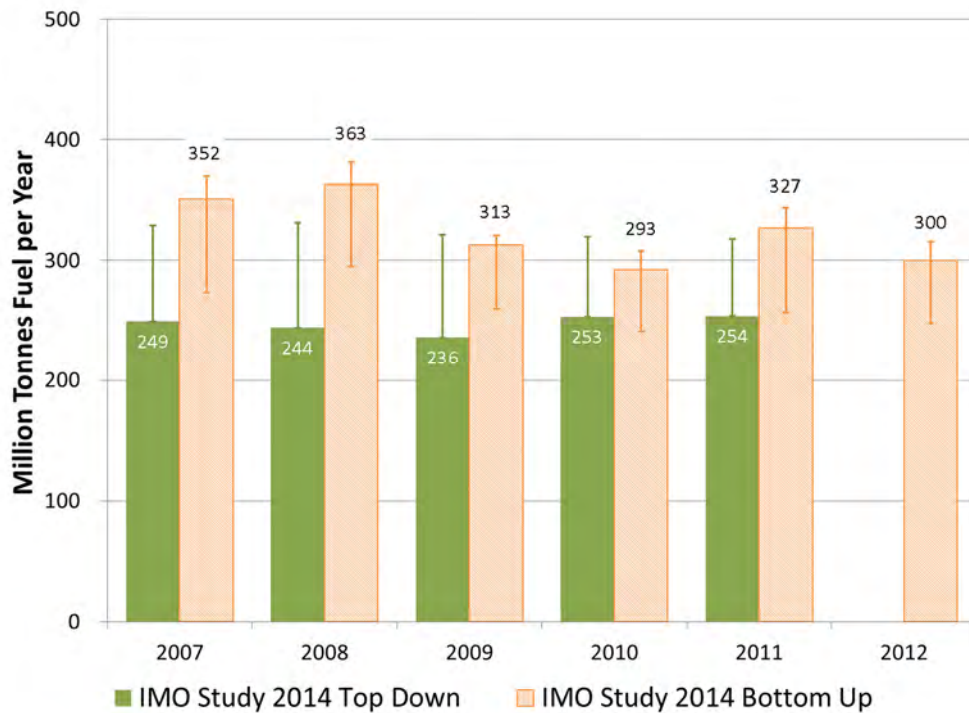

a. All ships



b. International shipping

Figure 64 Summary of uncertainty on top-down and bottom-up fuel inventories for a) all ships and b) international shipping.

## 1.6. Comparison of the CO<sub>2</sub> inventories in this study to the IMO GHG Study 2009 inventories

The IMO GHG Study 2014 produces multi-year inventories including 2007, which is the year that the IMO GHG Study 2009 selected for its most detailed inventory. The two top-down inventories compare very closely, at 249 versus 234 million metric tonnes fuel, for the 2014 and 2009 studies, respectively. Top-down comparisons differ by less than 10% and can be explained by the extrapolation of 2005 IEA data used by the IMO GHG Study 2009 to estimate 2007 top-down totals. Similarly, the best estimates for bottom-up global fuel inventories for 2007 in both studies differ by just over 5%, at 352 versus 333 million metric tonnes fuel, respectively. Bottom-up fuel inventories for international shipping differ by less than 3%.

Figure 65 and Figure 66 present results from this study (all years) and also from the IMO GHG Study 2009 (2007 only), including the uncertainty ranges for this work as presented in Section 1.5. The comparison of the estimates in 2007 shows that for both the top-down and bottom-up analysis methods, for both the total fuel inventory and international shipping, the results of the IMO GHG Study 2014 are in close agreement with findings from the IMO GHG Study 2009. Similarly, the CO<sub>2</sub> estimate of 1,054 million metric tonnes reported by the IMO GHG Study 2009 falls within the multi-year range of CO<sub>2</sub> estimates reported in the bottom-up method for this study.


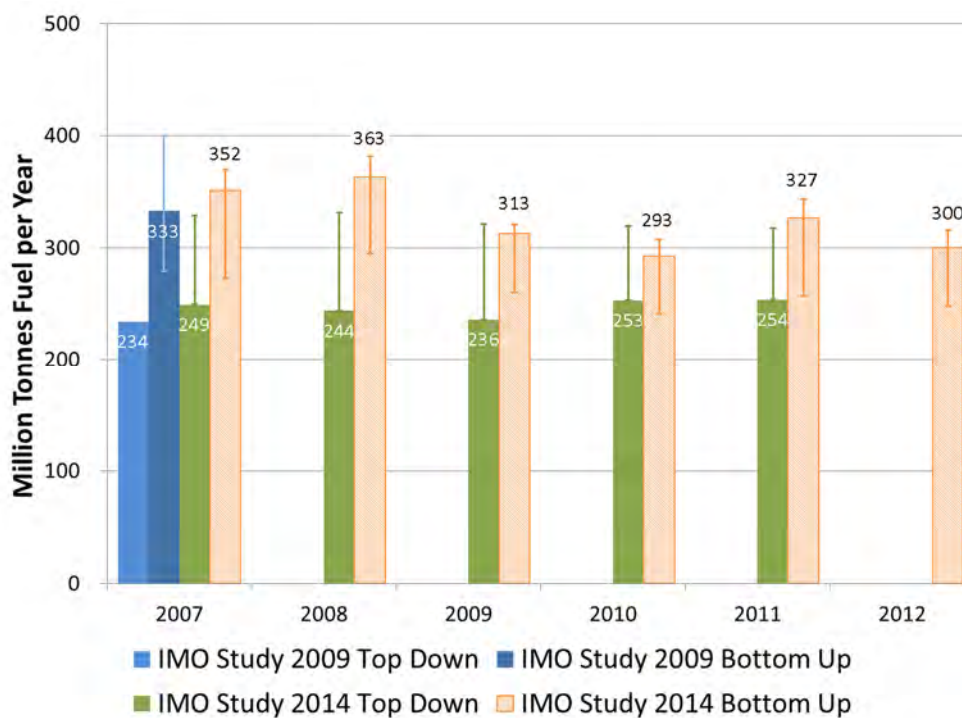


Figure 65 Top-down and bottom-up inventories for all ship fuels, from the IMO GHG Study 2014 and the IMO GHG Study 2009.




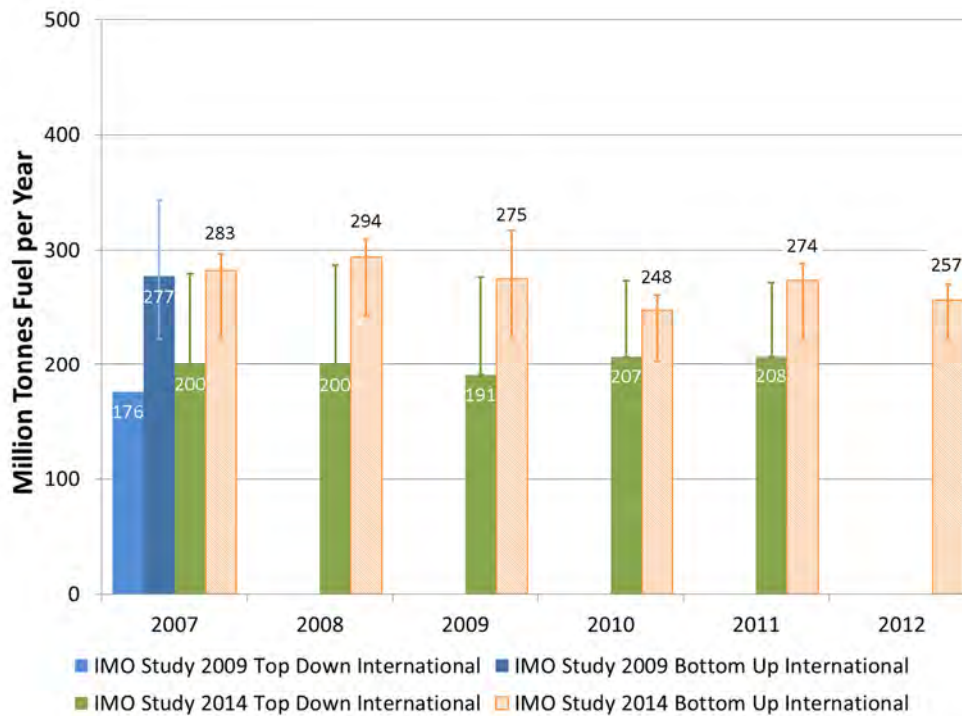

**Figure 66 Top-down and bottom-up inventories for international shipping fuels, from the IMO GHG Study 2014 and the IMO GHG Study 2009.**

Differences between the bottom-up and top-down estimated values are consistent with the IMO GHG Study 2009. This convergence is important because, in conjunction with the quality (Section 1.4) and uncertainty (Section 1.5) analyses, it provides evidence that increasing confidence can be placed in both analytic approaches.

There are some important explanatory reasons for the detailed activity method reported here to have fundamental similarity with other activity-based methods, even if they are less detailed. Crossplot comparisons in Figure 67 indicate that the fundamental input data to the bottom-up inventory in the IMO GHG Study 2009 appear valid, compared to the best available data used in the IMO GHG Study 2014.

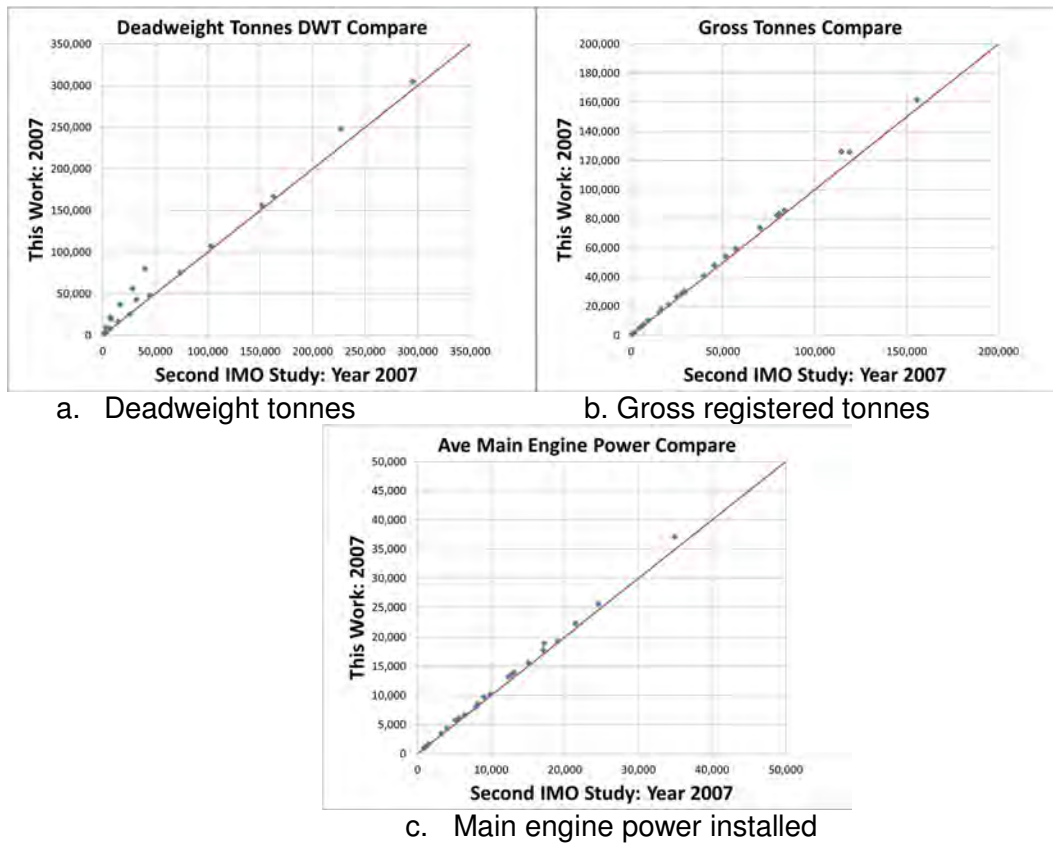

**Figure 67** Crossplots of deadweight tonnes, gross tonnes and average installed main engine power for the year 2007, as reported by the IMO GHG Study 2009 (x-axis) and the IMO GHG Study 2014 (y-axis).

There are differences in parameters between the studies. The most important uncertainty identified by the IMO GHG Study 2009 was engine operating days, especially for main engines. The 2009 study considered confidence to be ‘moderate, but dominates uncertainty,’ and explained that the coverage accuracy of the AIS data would affect uncertainty in several ways. Uncertainty in main engine load was reported as the second most important parameter affecting confidence in the 2009 bottom-up calculations.

Generally, uncertainty in auxiliary engine inputs was assessed as moderate to low in the IMO GHG Study 2009 (i.e., the study reported confidence in these to be moderate to high). The 2009 study identified several ways in which auxiliary engine information was uncertain, including engine size, auxiliary engine operating days, auxiliary engine load and auxiliary engine specific fuel oil consumption. The IHSF data on auxiliary engines used in IMO GHG Study 2014 remained sparse, although the consortium was able to access auxiliary data for more than 1000 ships from noon reports, previous vessel boardings, etc. These are shown in Figure 68.

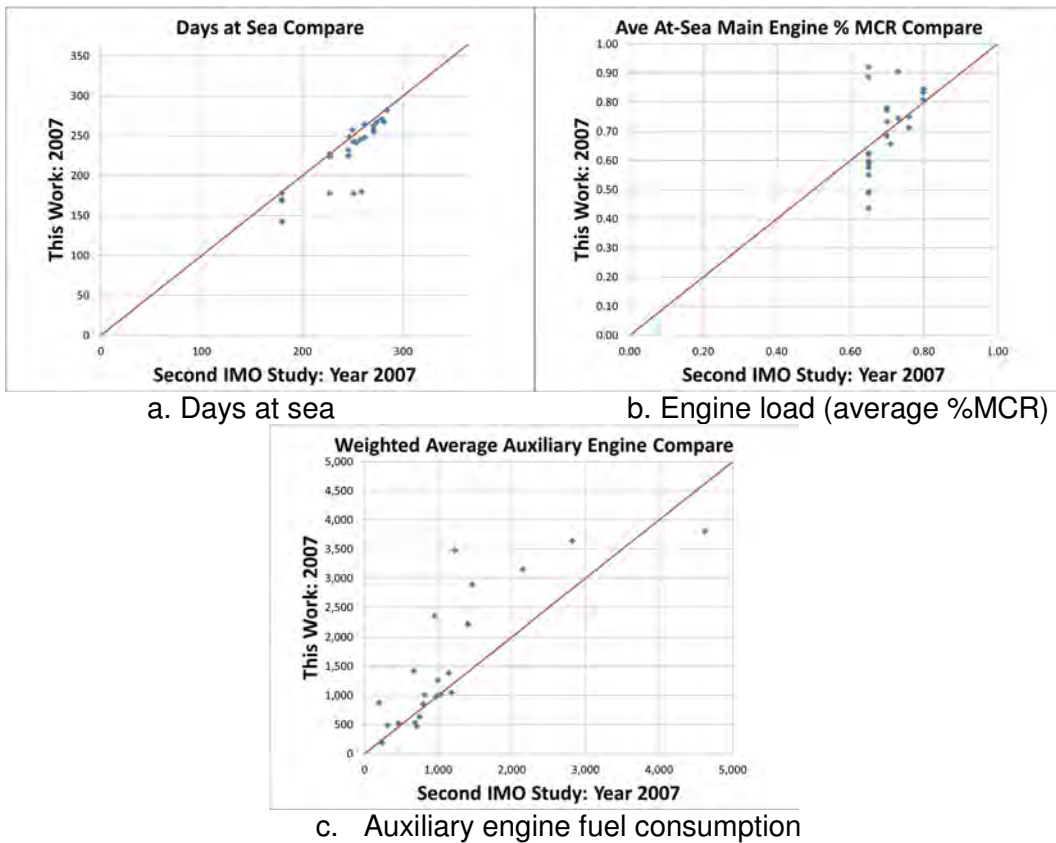


Figure 68 Crossplots for days at sea, average engine load (%MCR) and auxiliary engine fuel use for the year 2007, as reported by the IMO GHG Study 2009 (x-axis) and the IMO GHG Study 2014 (y-axis).

As a result, activity-based calculations of fuel consumption are generally similar. Figure 69 presents crossplots showing that average main engine fuel consumption and average total vessel fuel consumption patterns are consistent between the IMO GHG Study 2009 and the IMO GHG Study 2014.

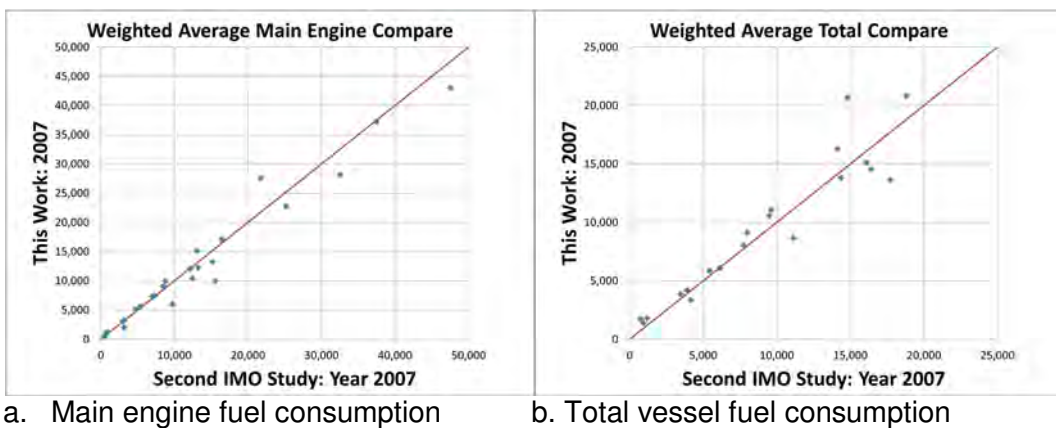


Figure 69 Crossplots for average main engine daily fuel consumption and total vessel daily fuel consumption for 2007, as reported by the IMO GHG Study 2009 (x-axis) and the IMO GHG Study 2014 (y-axis).

Figure 70 demonstrates good agreement between the various components of the calculation of fuel consumption. This provides evidence that observed good agreement in total fuel consumption is underpinned by good agreement in model design. These crossplots are most directly related to the international shipping totals reported in Figure 66. This is because the crossplots are limited to vessel categories that are known to be engaged in international shipping and where the IMO GHG Study 2014 categories can be directly matched to categories reported in 2009 study.

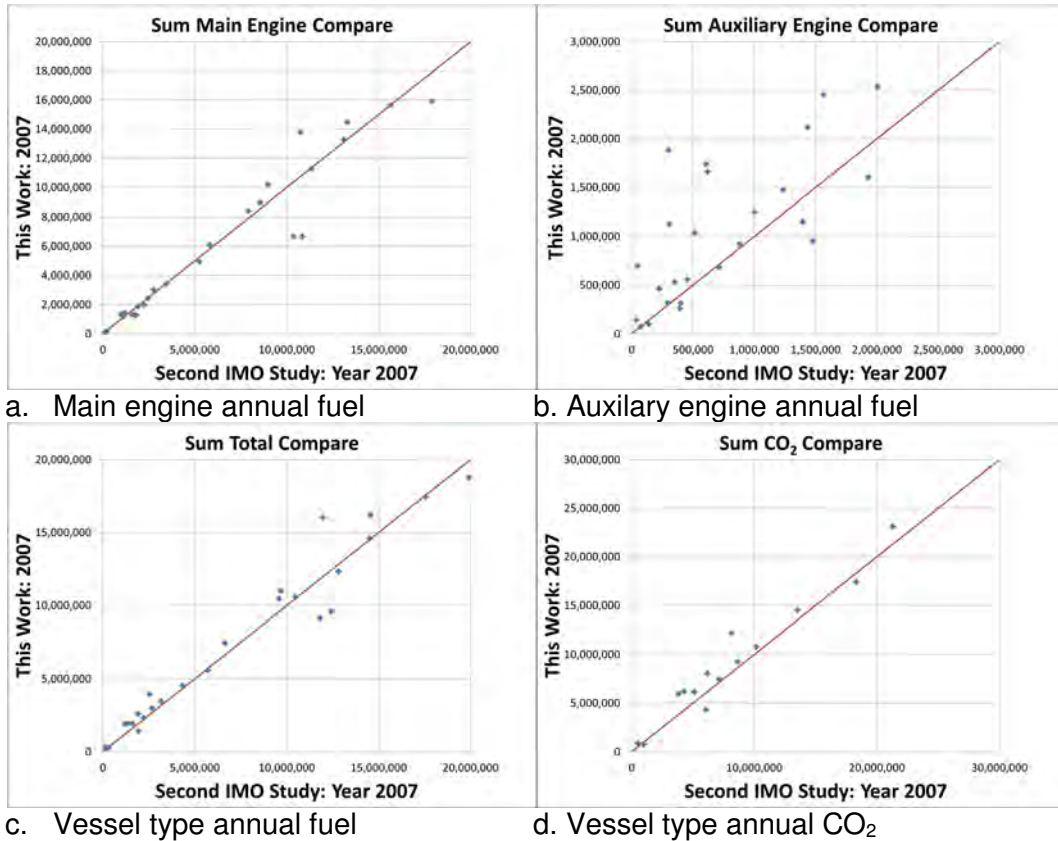


Figure 70 Crossplots for main engine annual fuel consumption, total vessel annual fuel consumption, aggregated vessel type annual fuel consumption and CO<sub>2</sub> for the year 2007, as reported by the IMO GHG Study 2009 (x-axis) and the IMO GHG Study 2014 (y-axis).

Table 33 summarises this discussion by making explicit the key differences between the 2009 study and the current study. Given these observations, the general conclusion is that better AIS data on activity are determinants of the precision of individual vessel calculations for activity-based emissions inventories. The variation between vessel voyage days, vessels in a vessel category and other important variations can only be evaluated with access to very detailed activity data. However, if a more general approach uses representative input parameters that reflect the best composite activity data, the results will generally be similar.

Table 33 Summary of major differences between the IMO GHG Study 2009 and IMO GHG Study 2014.

| Key variable           | Differences     | 2009 study                        | 2014 study  | Overall effect              |
|------------------------|-----------------|-----------------------------------|---|-----------------------------|
| Days at sea            | Data and method | Annual IHSF status indicator only | Uses quarterly IHSF status indicator to indicate if laid up for part of the year              | Minor decrease in emissions |
| At sea main engine MCR | Data and method | AIS informed expert judgment      | Uses AIS data extrapolation, quality checked using LRIT and noon reports                      | Minor increase in emissions |
| Auxiliary engine       | Data and method | Expert judgment annual aggregates | Aux power outputs derived from vessel boarding data and applied specific to mode of operation | Minor increase in emissions |

## 2. Inventories of emissions of GHGs and other relevant substances from international shipping 2007–2012

### 2.1. Top-down other relevant substances inventory calculation method

#### 2.1.1. Method for combustion emissions

The top-down calculation of non-CO<sub>2</sub> GHGs and other relevant substances is divided into two components:

- emissions resulting from the combustion of fuels;
- other emissions (HFCs, PFCs and SF<sub>6</sub>) used onboard ships.

The emissions from combustion of fuels are found in the fuel sales statistics (see Section 1.1) and emissions factors data. The method for other emissions replicates the methods used in the IMO GHG Study 2009.

The data for the fuel sales statistics were obtained and compiled for all available years (2007–2011) and are described in greater detail in Section 1.1. These fuel statistics, and their uncertainty, form the basis for top-down emissions estimates.

#### Estimation of emissions factors

Emissions factors are obtained from Section 2.2, as weighted averages for a given fuel type, taking into account the variation in engine type and operation. These values are more general in some cases than EFs used in bottom-up methods, because the limited detail for top-down does not allow the application of specific EFs to auxiliaries, varying engine load or other activity-based conditions. Generally, EFs corresponding to Tier 0 (pre-2000) engines and load factors of 70% and are listed in Table 34.

Where it is known that varying fuel sulphur levels can affect the SO<sub>x</sub> and PM emissions factors, that information can be used to produce yearly EFs for these top-down calculations, as shown in Table 34 and Table 35. The fuel statistics used are aggregated for fuel use in all engine types (main engine, boiler and auxiliary). Therefore, these emissions factors are not machinery type-specific but an aggregate for fuel use in all engine types with the preliminary working assumption that representative EFs can be derived from main engines only.

**Table 34 Emissions factors for top-down emissions from combustion of fuels.**

| Emissions substance | Marine HFO emissions factor (g/gfuel) | Marine MDO emissions factor (g/gfuel) | Marine LNG emissions factor (g/gfuel) |
|---------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| CO <sub>2</sub>     | 3.11400                               | 3.20600                               | 2.75000                               |
| CH <sub>4</sub>     | 0.00006                               | 0.00006                               | 0.05120                               |
| N <sub>2</sub> O    | 0.00016                               | 0.00015                               | 0.00011                               |
| NO <sub>x</sub>     | 0.09300                               | 0.08725                               | 0.00783                               |
| CO                  | 0.00277                               | 0.00277                               | 0.00783                               |
| NM VOC              | 0.00308                               | 0.00308                               | 0.00301                               |

**Table 35 Year-specific emissions factors for sulphur-dependent emissions (SO<sub>x</sub> and PM).**

| Fuel type                     | % Sulphur content averages – wt IMO <sup>1</sup> |         |         |         |         |         |
|-------------------------------|--|---------|---------|---------|---------|---------|
|                               | 2007   | 2008    | 2009    | 2010    | 2011    | 2012    |
| Average non-ECA HFO S%        | 2.42   | 2.37    | 2.6     | 2.61    | 2.65    | 2.51    |
| SO <sub>x</sub> EF (g/g fuel) |  |         |         |         |         |         |
| Marine fuel oil (HFO)         | 0.04749  | 0.04644 | 0.05066 | 0.05119 | 0.05171 | 0.04908 |
| Marine gas oil (MDO)          | 0.00264  | 0.00264 | 0.00264 | 0.00264 | 0.00264 | 0.00264 |
| Natural gas (LNG)             | 0.00002  | 0.00002 | 0.00002 | 0.00002 | 0.00002 | 0.00002 |
| PM EF (g/g fuel)              |  |         |         |         |         |         |
| Marine fuel oil (HFO)         | 0.00684  | 0.00677 | 0.00713 | 0.00713 | 0.00721 | 0.00699 |
| Marine gas oil (MDO)          | 0.00102  | 0.00102 | 0.00102 | 0.00102 | 0.00102 | 0.00102 |
| Natural gas (LNG)             | 0.00018  | 0.00018 | 0.00018 | 0.00018 | 0.00018 | 0.00018 |

<sup>1</sup>Source: MEPC's annual reports on Sulphur Monitoring Programme

All emissions factors are in mass of emissions per unit mass of fuel and the data compiled in Section 1.1 are in units of mass of fuel, so for oil-based fuels the production of the total emission is a straightforward multiplication. Further work is needed to compile the gas fuel emissions factors and the method for emissions calculation (the units for gas fuel use are mass of oil equivalent).

### 2.1.2. Methane slip

Some of the fuel of used in gas engines is emitted unburned to the atmosphere. This feature is specific to LNG marine engines running on liquid natural gas (LNG) with low engine loads. A new generation of gas engines, based on the Otto-cycle (spark-ignited, lean-burn engines), is reported to significantly reduce methane slip significantly with improvements made to cylinder, cylinder head and valve systems. In this study, methane slip is included in the combustion EF for CH<sub>4</sub> in LNG fuelled engines. However, for the top-down analysis it was not feasible to estimate the energy usage (kWh) for the global LNG fleet.

### 2.1.3. Method for estimation for non-combustion emissions

#### Refrigerants, halogenated hydrocarbons

Refrigerants are used on board vessels for air conditioning, provisional and cargo cooling purposes. The ozone-depleting substances (HCFCs and CFCs) have been replaced with other refrigerants, like HFCs 1,1,1,2-tetrafluoroethane (R134a) and a mixture of pentafluoroethane, trifluoroethane and tetrafluoroethane (R404a). All these refrigerants, including the replacements for ozone-depleting substances, have significant GWP. The GWP is reported as CO<sub>2</sub> equivalent (CO<sub>2</sub>e): this describes the equivalent amount of CO<sub>2</sub> that would be needed to achieve the same warming effect. The numerical values of GWP for different substances used in this study were taken from the 4th IPCC Assessment report and are based on the latest IPCC estimate of CO<sub>2</sub> concentration in the atmosphere.

This part of the report builds on the findings of two others: the United Nations Environmental Programme (UNEP) 2010 report 'Refrigeration, Air Conditioning and Heat Pumps Technical Options Committee' and the EU DG Environment report 2007, 'The analysis of the emissions of fluorinated greenhouse gases from refrigeration and air conditioning equipment used in the transport sector other than road transport and options for reducing these emissions – Maritime, Rail, and Aircraft Sector'.

#### Other refrigerants, SF<sub>6</sub>

Sulphur hexafluoride (SF<sub>6</sub>) is a colourless, odourless, non-toxic, non-flammable gas that has a high dielectric strength. It has been used as a dielectric in microwave frequencies, an insulating medium for the power supplies of high-voltage machines and in some military applications, for example as torpedo propellant. Sulphur hexafluoride is also gaining use in non-electrical applications, including blanketing of molten magnesium (molten magnesium will

oxidise violently in air), leak detection and plasma etching in the semi-conductor industry. Sulphur hexafluoride also has some limited medical applications. SF<sub>6</sub> is extensively used as a gaseous dielectric in various kinds of electrical power equipment, such as switchgear, transformers, condensers and medium- to high-voltage (>1kV) circuit breakers (Compressed Gas Association Inc. 1990). In circuit breakers, SF<sub>6</sub> is typically used in a sealed pressurised chamber to prevent electrical arcing between conductors.

According to World Bank data (2010) global SF<sub>6</sub> emissions were 22,800 thousand tonnes CO<sub>2</sub>e, which corresponds to 463 tons (i.e., short tons, per key definition for ton) of SF<sub>6</sub> emitted from all sectors. (According to the UNFCCC, SF<sub>6</sub> has a GWP of 23,900). The use of SF<sub>6</sub> in electrical switchgear in general (all land, air and sea installations) is primarily (90%) concentrated on the high-voltage segment (>36kV) and the remaining 10% for the medium (1–36kV) voltage segment (Schneider 2003). Ships rarely use electrical systems over 11kV and typical nominal voltages are in the 1–11kV range (Ackermann and Planitz 2009). The leaks from sealed systems are small: the EPA (2006) estimates a range of 0.2–2.5% per year. However, the mass of SF<sub>6</sub> on board the global fleet is unknown, which prohibits detailed analysis of SF<sub>6</sub> emissions from shipping.

If this 90%/10% division is assumed, which represents SF<sub>6</sub> use in high/medium voltage systems, also applies to emissions, medium-voltage systems would be responsible for 46.3 tons of SF<sub>6</sub> emitted annually. If all medium-voltage systems were installed in ships (i.e. no medium-voltage installations on land), the maximum contribution to total GHG emissions from shipping would be 1.1 million tons (46.3 tons x 22,800 CO<sub>2</sub>e/ton) of CO<sub>2</sub>e (IPCC 2007), which is less than 0.1% of the total CO<sub>2</sub> emissions from shipping in 2010. The actual emissions of SF<sub>6</sub> are likely to be less than this, because alternative solutions (vacuum, CO<sub>2</sub>) are also available in arc quenching. Because SF<sub>6</sub> emissions from ships are negligible, they are not considered further in this report.

#### Other refrigerants, PFCs

Several binary and ternary blends of various HFC, HCFC, PFC and hydrocarbon refrigerants have been developed to address continuing service demand for CFC-12. These blends are tailored to have physical and thermodynamic properties comparable to the requirements of the original CFC-12 refrigerant charge.

HFCs were used to replace halon-based systems in the mid-1990s. A small quantity of PFC (mainly C<sub>4</sub>F<sub>10</sub>) was imported by a US company into the EU to be used as an alternative fluid in fire-fighting fixed systems. The main application of these PFC-based fixed systems is for fire protection by flooding closed rooms (e.g. control rooms) with halon to replace oxygen. Imports for new systems stopped in 1999, as this application of PFCs was not regarded as an essential use (AEA 2010). The electronics and metal industry is a large consumer of PFC compounds, which are used as etching agents during manufacturing (IPCC/TEAP 2005). The main PFC used as a refrigerant is octafluoropropane (C<sub>3</sub>F<sub>8</sub>), which is a component of the R-413a refrigerant (Danish EPA 2003). The composition of R-413a is 88% R-134a, 9% C<sub>3</sub>F<sub>8</sub> and 3% isobutane and it is used in automotive air conditioning (Danish EPA 2003). Another refrigerant with C<sub>3</sub>F<sub>8</sub> is Isceon 89, a mixture of 86% HFC-125, 9% C<sub>3</sub>F<sub>8</sub> and 5% propane. Isceon 89 is used for deep-freezing purposes (–40°C to –70°C), like freeze dryers, medical freezers and environmental chambers (DuPont 2005).

The annual leakage of all refrigerants from cooling equipment of reefer and fishing vessels is estimated at 2200 tons. The extreme worst-case estimate assumes all this is Isceon 89, which contains 9% of C<sub>3</sub>F<sub>8</sub>. This would total 201 tons of C<sub>3</sub>F<sub>8</sub> and correspond to (8830 CO<sub>2</sub>e/ton \* 201 tons) 1.8 million tons of CO<sub>2</sub>e, which is about 0.2% of the total CO<sub>2</sub> emitted from ships in 2010. The emissions of C<sub>3</sub>F<sub>8</sub> from ships are likely to be smaller than this value because the need for extreme cooling is limited; only some reefer cargo ships and fishing vessels may need this temperature range. Because PFC emissions from ships are likely to be negligible, they are not considered further in this report.

### Method used in this study

In this study the use of ozone-depleting R-22 has been restricted to vessels built before 2000. The amounts of refrigerant used in various types of ship for air conditioning of passenger areas and provision of refrigeration (galley, cargo) are described in Table 36.

**Table 36 Amounts of refrigerants carried by various types of ships (from DG ENV report).**

| Ship type                   | kg/AC      | kg/refr   | % vessels built after 1999 |
|-----------------------------|------------|-----------|----------------------------|
| Bulk carrier                | 150        | 10        | 59%                        |
| Chemical tanker             | 150        | 10        | 63%                        |
| Container                   | 150        | 10        | 59%                        |
| Cruise                      | 6000       | 400       | 37%                        |
| Ferry – Pax only            | 500        | 20        | 23%                        |
| Ferry – Ro-Pax              | 500        | 20        | 27%                        |
| General cargo               | 150        | 10        | 27%                        |
| Liquefied gas tanker        | 150        | 10        | 53%                        |
| Miscellaneous – fishing     | 150        | 210**     | 15%                        |
| Miscellaneous – other       | 150        | 10        | 32%                        |
| Offshore                    | 150        | 10        | 56%                        |
| Oil tanker                  | 150        | 10        | 45%                        |
| Other liquids tankers       | 150        | 10        | 45%                        |
| Refrigerated bulk           | 150        | 2500*     | 7%                         |
| Ro-Ro                       | 500        | 20        | 26%                        |
| Service – tug               | 150        | 10        | 45%                        |
| Service – other             | 150        | 10        | 32%                        |
| Vehicle                     | 150        | 10        | 57%                        |
| Yacht                       | 150        | 10        | 66%                        |
| Total, tons in global fleet | 21917 tons | 8569 tons |                            |

\* Vessels using cargo cooling are assigned 2500kg refrigerant charge, which is an average of the range (1000–5000kg) indicated in the DG ENV report.

\*\* Refrigerant carried by fishing vessels has been calculated as a weighted average of 7970 fishing vessels described in DG ENV report.

\*\*\*

In addition to the vessels, there are 1.7 million refrigerated containers, each of which carries approximately 6kg of refrigerant (80% R134a, 20% R-22) (DG ENV 2007).

Refrigerants used in the calculation are assumed as R-22 for both air conditioning and cooling for vessels built before 2000. For newer vessels, R134a is assumed for air conditioning and R404a for provisional cooling purposes. Refrigerant loss of 40% is assumed for all ships, except for passenger vessels for which 20% annual loss of refrigerants is assumed.

### Fishing vessels and reefer ships

In Table 36, two distinctions between the existing reports (UNEP, DG ENV) are made. First, the refrigerant charge carried by the world fishing fleet (Miscellaneous – fishing) was based on the DG ENV report, which describes the use of refrigerants on board the European fishing fleet. In this study, the weighted average (number of vessels, refrigerant charge carried) of the European fishing fleet (approximately 8000 vessels) was used to estimate the air conditioning



and cooling needs of the global fishing fleet. The composition of the EU fishing fleet is likely to be different from the global fleet, and this will be reflected in the estimates of the refrigerant emissions of the global fishing fleet. The second difference concerns reefer ships. According to both existing reports (UNEP, DG ENV), the reefer fleet carries 1–5 tons of refrigerants per ship for cargo cooling. This study takes the average (2.5 tons of refrigerants) and assumes R-22 to be used in vessels built before 2000 (DG ENV 2007).

### **Reefer containers**

Refrigerants can also be found in the cooling systems of reefer containers, which are used to provide a controlled environment for perishable goods, like fruit, during cargo transport. The fleet of dedicated refrigerated cargo-carrying vessels has decreased over the years and is slowly being replaced by container ships carrying reefer containers. According to the DG ENV report (2007), each reefer container carries 6kg refrigerant charge, of which 15% is lost annually. The number of refrigerated containers has been estimated in the DG ENV report (2006 figure) as 1.6 million TEUs. In this study the number of refrigerated containers for 2012 was based on the projected number of reefer plugs of the world container fleet (1.7 million TEUs). The reefer container count was based on the IHS Fairplay data for 5400 container ships (1.7 million TEUs). The projection has some inherent uncertainty, because reefer plug installations (not reefer TEU counts) have been used. Also, the completeness of the container ship fleet in the dataset used to determine the reefer plug count is likely to have some impact on the reefer TEU numbers, because this dataset consists of some 85,000 vessels and so does not cover the complete global fleet.

### **Estimated emissions of refrigerants from ships**

Both the UNEP and DG ENV report use the 100gt limit to indicate a vessel that has refrigerants on board. This assumption was based on expert judgements on vessels that operate in a variety of climate conditions and need air conditioning.

In this study, the fleet-wide assessment is made according to the vessel construction year (before 2000, constructed that year or later) and refrigerant type is assigned on the basis of the vessels' age. For old vessels, HCFCs (R-22) were assumed, while new vessels use HCFs (R134a/R404a).

The estimated annual total of refrigerant loss in the global fleet in year 2012 is described in Table 37.

**Table 37 Annual loss of refrigerants from the global fleet during 2012. Annual release of 40% total refrigerant carried is assumed except for passenger class vessels, where 20% refrigerant loss is assumed. Ro-Ro, Pax, Ro-Pax and cruise vessels are calculated as passenger ships.**

| Ship type               | Annual loss, air conditioning, tons | Annual loss, cooling, tons | R-22, tons    | R134a, tons   | R404, tons    |
|-------------------------|-------------------------------------|----------------------------|---------------|---------------|---------------|
| Bulk carrier            | 466.9                               | 31.1                       | 195.7         | 275.4         | 14.6          |
| Chemical tanker         | 221.7                               | 14.8                       | 83.6          | 140.0         | 6.7           |
| Container               | 230.5                               | 15.4                       | 96.4          | 136.2         | 7.2           |
| Cruise                  | 622.8                               | 41.5                       | 407.9         | 228.1         | 20.8          |
| Ferry – Pax only        | 313.9                               | 12.6                       | 245.9         | 72.8          | 6.3           |
| Ferry – Ro-Pax          | 285.6                               | 11.4                       | 211.8         | 78.0          | 5.7           |
| General cargo           | 740.0                               | 49.3                       | 555.2         | 196.9         | 28.5          |
| Liquefied gas tanker    | 72.4                                | 4.8                        | 35.1          | 38.1          | 2.4           |
| Miscellaneous - fishing | 1000.3                              | 1421.1                     | 1259.8        | 145.4         | 878.6         |
| Miscellaneous - other   | 261.0                               | 17.4                       | 180.9         | 84.0          | 9.7           |
| Offshore                | 309.2                               | 20.6                       | 138.2         | 174.0         | 9.9           |
| Oil tanker              | 332.1                               | 22.1                       | 186.0         | 150.1         | 11.4          |
| Other liquids tankers   | 6.7                                 | 0.4                        | 3.8           | 3.0           | 0.2           |
| Refrigerated bulk       | 48.7                                | 812.3                      | 297.5         | 3.4           | 522.9         |
| Ro-Ro                   | 173.9                               | 7.0                        | 130.7         | 45.7          | 3.5           |
| Service - tug           | 657.5                               | 43.8                       | 372.9         | 292.7         | 22.7          |
| Service - other         | 26.1                                | 1.7                        | 18.1          | 8.4           | 1.0           |
| Vehicle                 | 37.5                                | 2.5                        | 16.6          | 21.3          | 1.2           |
| Yacht                   | 70.2                                | 4.7                        | 24.2          | 46.6          | 2.1           |
| <b>Total, tons</b>      | <b>5877.1</b>                       | <b>2534.6</b>              | <b>4460.1</b> | <b>2140.2</b> | <b>1555.4</b> |

The estimated reefer TEU count globally is 1.7 million TEUs, which would result in 10,070 tons of refrigerant charge and 1510 tons refrigerant release in 2012. This means an additional 1208 tons of R134a and 302 tons of R404 on top of the values in Table 37, if the 80:20 ratio of the DG ENV (2007) report is used.

There is large uncertainty about the leakage rate of refrigerants from ships. A range of 20–40% is reported by both the UNEP and DG ENV, attributed to the permanent exposure of refrigerated systems to continuous motion (waves), which can cause damage and leakage to piping (DG ENV). The average estimate, using a 30% leakage rate, is described in Table 37 and amounts to 8412 tons. The corresponding values for low and high bound estimates are 5967 and 10,726 tons, respectively. In the 2010 UNEP report, the annual loss of refrigerants is reported as 7850 tons, which is close to the estimate of this study. If the refrigerant emissions from reefer containers are included, then an additional 1510 tons (80% R-134a, 20% R404a) should be added to these numbers.

#### **Global warming potential of refrigerant emission from ships**

According to the results of this study, the share of R22 is 70%, R134a 26% and R404a 4%. The balance of refrigerant shares will shift towards R134a when old vessels using R-22 as a

cooling agent are replaced with new ships using HCFs (R134a). The use of R-22 in industrial refrigeration in developed countries is on the decline because it is banned in new refrigerating units. However, the Montreal Protocol has determined that it can be used until 2040 in developing countries.


**Table 38 Global warming potential of refrigerants commonly used in ships. The GWP<sub>100</sub> is described relative to CO<sub>2</sub> warming potential (IPCC 4<sup>th</sup> Assessment Report: Climate Change 2007).**

| Refrigerant | Warming potential (relative to CO <sub>2</sub> ) |
|-------------|--|
| R22         | 1810   |
| R134a       | 1430   |
| R404a       | 3260   |

The release of refrigerants from global shipping is estimated as 8412 tons, which corresponds to 15 million tons (range 10.8–19.1 million tons) in CO<sub>2</sub>e emissions. Inclusion of reefer container refrigerant emissions yields 13.5 million tons (low) and 21.8 million tons (high) of CO<sub>2</sub>e emissions. If these numbers are compared to CO<sub>2</sub> emissions of shipping during 2011 (top-down estimate of 794 million tons of CO<sub>2</sub>), refrigerant emissions constitute about 1.9% of the GHG emissions of shipping. Inclusion of the reefer TEUs increases this to 2.2% of the total GHG emissions from shipping.

#### Refrigerant emissions from ships 2007–2012

The emissions of refrigerants from ships are mainly affected by changes in the size and composition of the global fleet. The methodology used to assess refrigerant emissions is driven by the age structure of each ship type rather than the activity patterns of vessels. This assumption makes the annual emission changes small (Figure 71) but nevertheless consistent with the UNEP report (2010). Also, the dominant substance is R22 (70% share), which is in line with previous studies (UNEP 2010; DG ENV 2007).

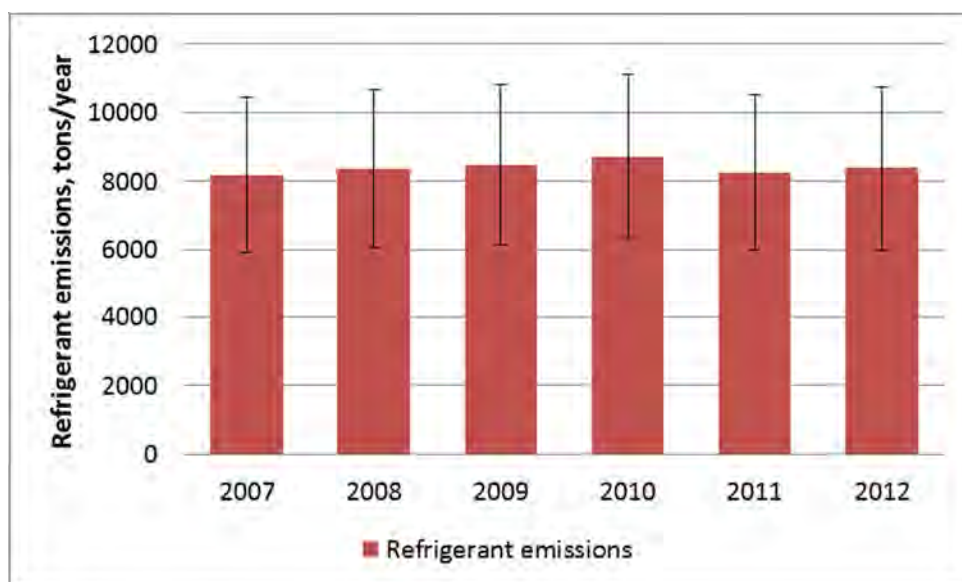

**Figure 71 Estimated refrigerant emissions of the global fleet 2007–2012.**

The slow decrease of R22 share in ship systems (Table 39) means that R22 will be present for a long time, possibly decades, before it is replaced by other substances.

**Table 39 Annual emissions of refrigerants from the global fleet and the estimated shares of different refrigerants.**

| Year      | Refrigerant emissions, tons, reefer TEUs excluded | Low bound, tons | High bound, tons | %, R22 | %, R134a | %, R404 |
|-----------|---|-----------------|------------------|--------|----------|---------|
| 2007      | 8185  | 5926            | 10444            | 80%    | 17%      | 4%      |
| 2008      | 8349  | 6045            | 10654            | 77%    | 19%      | 4%      |
| 2009      | 8484  | 6144            | 10825            | 75%    | 21%      | 4%      |
| 2010      | 8709  | 6307            | 11110            | 73%    | 23%      | 4%      |
| 2011      | 8235  | 5967            | 10503            | 71%    | 24%      | 4%      |
| 2012      | 8412  | 5967            | 10726            | 70%    | 26%      | 4%      |
| UNEP 2010 | 7850  |                 |                  |        |          |         |

### Non-exhaust emissions of NMVOCs from ships

The reported global crude oil transport in 2012 was 1929 million tons (UNCTAD Review of Maritime Transport 2013). This study applies the same methodology as the IMO GHG Study 2009 and uses the net standard volume (= NSV at bill of lading – NSV at out-turn) loss of 0.177%. This corresponds to 0.124% mass loss and results in VOC emissions of 2.4 million tons, which is very close to the value of the 2009 study figures for 2006 (crude oil transport 1941 million tons, VOC emissions 2.4 million tons).

## 2.2. Bottom-up other relevant substances emissions calculation method

### 2.2.1. Method

Three primary emission sources are found on ships: main engine(s), auxiliary engines and boilers. The consortium studied emissions from main and auxiliary engines as well as boilers in this report. Emissions from other energy-consuming sources were omitted because of their small overall contribution. Emissions from non-combustion sources, such as HFCs, are estimated consistent with the IMO GHG Study 2009 methods.

### 2.2.2. Main engine(s)

Emissions from the main engine(s) or propulsion engine(s) (both in terms of magnitude and emissions factor) vary as a function of main engine rated power output, load factor and the engine build year. The main engine power output and load factor vary over time as a result of a ship's operation and activity specifics – operational mode (e.g. at berth, anchoring, manoeuvring), speed, loading condition, weather, etc. Emissions are also specific to a ship, as individual ships have varying machinery and activity specifications. The bottom-up model described in Section 1.2 calculates these specifics (main engine power output and load factor) for each individual ship in the global fleet and for activity over the year disaggregated to an hourly basis. This same model is therefore used for the calculations of the other main engine emissions substances.

### 2.2.3. Auxiliary engines

Emissions from auxiliary engines (both in terms of magnitude and emissions factor) vary as a function of auxiliary power demand (typically changing by vessel operation mode), auxiliary engine rated power output, load factor and the engine build year. Technical and operational data about auxiliary engines are often missing from commercial databases, especially for older ships (constructed before 2000). Technical data (power rating, stroke, model number, etc.) of auxiliary engines of new vessels can be found much more frequently than for old vessels; however, these form a very small percentage of the entire fleet. There are typically two or more auxiliary engines on a ship and the number and power rating (not necessarily the same for all engines on a ship) of each engine is determined by the ship owner's design criteria. This means that the actual operation of the specific auxiliary engines, by vessel type and

operational mode, can vary significantly from ship to ship. There are no commercial databases that provide these operational profiles on an operational mode or vessel-class basis. This lack of data will hinder the determination of auxiliary engine power estimation using predetermined auxiliary engine load levels. For this reason, the approach taken in this study is based on the vessel surveys conducted by Starcrest for various ports in North America. These surveys allow the determination of auxiliary engine power requirements or total auxiliary loads in various operating modes of vessels. Further information relating to the approaches used to estimate auxiliary engine loads are provided in Section 1.2.5 and Annex 1. Detailed explanation of auxiliary engine power prediction can be found in Starcrest (2013).

**2.2.4. Boilers**

Emissions from auxiliary boilers vary based on vessel class and operational mode. For example, tankers typically have large steam plants powered by large boilers that supply steam to the cargo pumps and in some cases heat cargoes. For most non-tanker class vessels, boilers are used to supply hot water to keep the main engine(s) warm (during at-berth or anchorage calls) and for crew and other ancillary needs. These boilers are typically smaller and are not used during open-ocean operations because of the waste heat recovery systems (i.e., economisers) that take the waste head from the main engine(s). Unlike main and auxiliary engines, the emissions factors do not change, as there are no regulatory frameworks associated with boilers. Of the three emission source types, boilers typically have significantly fewer emissions than main and auxiliary engines. Further details about auxiliary boilers are provided in Section 1.2.5 and Annex 1.

**2.2.5. Operating modes**

The auxiliary engine use profiles have been specifically defined for each ship type and size class. Furthermore, auxiliary engine use varies according to vessel operating modes, which are defined by vessel speed ranges. The modes used in this study are defined in Table 40. Auxiliary engine use during harbour visits is divided into two modes: at-berth describes the auxiliary engine use during cargo loading or unloading operations and anchoring involves extended waiting periods when cargo operations do not take place.

**Table 40 Vessel operating modes used in this study.**

| Speed, knots                               | Mode            |
|--|-----------------|
| Less than 1 knot                           | At berth        |
| 1-3 knots                                  | Anchored        |
| Greater than 3 knots and less than 20% MCR | Manoeuvring     |
| Between 20% MCR and 65% MCR                | Slow-steaming   |
| Above 65% MCR                              | Normal cruising |

Further details on auxiliary engine and boiler loads, by vessel class and mode, are given in Section 1.2.5 and Annex 1.

**2.2.6. Non-combustion emissions**

Emissions from non-combustion sources (refrigerants and NMVOCs from oil transport) on board vessels were evaluated with the top-down approach using the fleet-wide methodology described in Section 2.1.2 to maintain consistency with the IMO GHG Study 2009. The emission factors of non-combustion sources have wide variations and the significance to overall GHG emissions is small (less than 3%). It is very unlikely that the bottom-up approach to the modelling of non-combustion sources would change this conclusion.

**Methane emissions**

Emissions of CH<sub>4</sub> to the atmosphere are associated with LNG powered vessels and include venting, leakage and methane slip. Venting and leakage related to maritime LNG operations are not included in this report. Methane slip during the combustion process is accounted for in the combustion emission factors detailed in Section 2.2.7.

## NM VOC emissions from non-combustion sources

The NM VOC emissions from crude oil cargo operations and transport have not been included in the bottom-up analysis. An estimate of global NM VOC emissions has been presented in the top-down analysis (see Section 2.1.2).

### 2.2.7. Combustion emissions factors

Emissions factors are used in conjunction with energy or fuel consumption to estimate emissions and can vary by pollutant, engine type, duty cycle and fuel. Emissions tests are used to develop emission factors in g/kWh and are converted to fuel-based emissions factors (grams pollutant per grams of fuel consumed) by dividing by the brake-specific fuel consumption (BSFC) or specific fuel oil consumption (SFOC) corresponding to the test associated with the emissions factors. Pollutant-specific information relating to emission factors is provided later in this section. Emissions factors vary by: engine type (main, auxiliary, auxiliary boilers); engine rating (SSD, MSD, HSD); whether engines are pre-IMO Tier I, or meet IMO Tier I or II requirements; and type of service (duty cycle) in which they operate (propulsion or auxiliary). Emissions factors are adjusted further for fuel type (HFO, MDO, MGO, and LNG) and the sulphur content of the fuel being burned. Finally, engine load variability is incorporated into the factors used for estimating emissions. All these variables were taken into account when estimating the bottom-up emissions inventories (2007–2012) using the following methodology:

- 1 Identify baseline emissions factors with the following hierarchy: IMO emission factors, if none published, then consortium-recommended emission factors from other studies that members are using in their published work. Emission factors come in two groups: energy-based in g pollutant/kWh and fuel-based in g pollutant/g fuel consumed. The baseline fuel for the bottom-up emission factors is defined as HFO fuel with 2.7% sulphur content.
- 2 Convert energy-based baseline emissions factors in g pollutant/kWh to fuel-based emission factors in pollutant/ g fuel consumed, as applicable, using:

$$EF_{baseline} (g \text{ pollutant}/g \text{ fuel}) = \frac{EF_{baseline} (g \text{ pollutant}/kWh)}{SFOC_{baseline} (g \text{ fuel}/kWh)} \quad \text{Eq. (1)}$$

where,

$EF_{baseline}$  – cited emission factor

$SFOC_{baseline}$  – SFOC associated with the cited emission factor

- 3 Use FCF, as applicable, to adjust emission factors for the specific fuel used by the engine.

$$EF_{actual} (g \text{ pollutant}/g \text{ fuel}) = EF_{baseline} (g \text{ pollutant}/g \text{ fuel}) \times FC \quad \text{Eq. (2)}$$

Convert to kg pollutant/tonne fuel consumed (for presentation/comparison purposes consistent with IMO GHG Study 2009).

- 4 Adjust  $EF_{actual}$  based on variable engine loads using SFOC engine curves and low load adjustment factors to adjust the SFOC.

Emissions factors were developed for the following GHGs and pollutants:

- carbon dioxide, CO<sub>2</sub>
- oxides of nitrogen, NO<sub>x</sub>
- sulphur oxides, SO<sub>x</sub>
- particulate matter, PM
- carbon dioxide, CO
- methane, CH<sub>4</sub>

- nitrous oxide, N<sub>2</sub>O
- non-methane volatile organic compounds, NMVOC

An overview of baseline emissions factors, fuel correction factors and adjustments based on variable engine loads and SFOC is provided in the following sections on GHGs and pollutants. For comparison purposes with the IMO GHG Study 2009, emissions factors are provided in kg of pollutant per tonne of fuel. Emissions factors in grams pollutant per gram of fuel and grams pollutant per kWh or g/kWh along with associated references are provided in Table 21 in Annex 6.

### CO<sub>2</sub> baseline

The carbon content of each fuel type is constant and is not affected by engine type, duty cycle or other parameters when looking on a kg CO<sub>2</sub> per tonne fuel basis. The fuel-based CO<sub>2</sub> emissions factors for main and auxiliary engines at slow, medium and high speeds are based on MEPC 63/23, Annex 8 and include:

|         |  |
|---------|--|
| HFO     | EF <sub>baseline</sub> CO <sub>2</sub> = 3,114 kg CO <sub>2</sub> /tonne fuel  |
| MDO/MGO | EF <sub>baseline</sub> CO <sub>2</sub> = 3,206 kg CO <sub>2</sub> / tonne fuel |
| LNG     | EF <sub>baseline</sub> CO <sub>2</sub> = 2,750 kg CO <sub>2</sub> / tonne fuel |

It should be noted that CO<sub>2</sub> emissions are also unaffected by the sulphur content of the fuel burned. For further information on specific emissions factors and references, see Annex 6.

### NO<sub>x</sub> baseline

The NO<sub>x</sub> emission factors for main and auxiliary engines rated at slow, medium and high speeds were assigned according to the IMO NO<sub>x</sub> Tiers I and II standards as defined in MARPOL Annex VI, Regulation 13. Emissions for Tier 0 engines (constructed before 2000) were modelled in accordance with Starcrest (2013). The SFOC corresponding to the energy-based emission factors was used to convert to fuel-based emissions factors. NO<sub>x</sub> EF<sub>baseline</sub> for boilers (denoted by STM respectively in Table 41) remains the same, as there are no IMO emissions standards that apply to boiler emissions. The emission factors used in the study are presented in Table 41.

**Table 41 NO<sub>x</sub> baseline emissions factors.**

| IMO Tier | Eng speed/type | Fuel type | SFOC ME/Aux | ME EF <sub>baseline</sub> (kg/tonne fuel) | Aux eng EF <sub>baseline</sub> (kg/tonne fuel) | Reference       |
|----------|----------------|-----------|-------------|---|--|-----------------|
| 0        | SSD            | HFO       | 195/na      | 92.82                                     | na   | ENTEC 2002      |
|          | MSD            | HFO       | 215/227     | 65.12                                     | 64.76  | ENTEC 2002      |
|          | HSD            | HFO       | na/227      | na  | 51.10  | ENTEC 2002      |
| 1        | SSD            | HFO       | 195/na      | 87.18                                     | na   | IMO Tier I      |
|          | MSD            | HFO       | 215/227     | 60.47                                     | 57.27  | IMO Tier I      |
|          | HSD            | HFO       | na/227      | na  | 45.81  | IMO Tier I      |
| 2        | SSD            | HFO       | 195/na      | 78.46                                     | na   | IMO Tier II     |
|          | MSD            | HFO       | 215/227     | 52.09                                     | 49.34  | IMO Tier II     |
|          | HSD            | MDO       | na/227      | na  | 36.12  | IMO Tier II     |
| all      | Otto           | LNG       | 166         | 7.83                                      | 7.83   | Kristensen 2012 |
| na       | GT             | HFO       | 305         | 20.00                                     | na   | IVL 2004        |
| na       | STM            | HFO       | 305         | 6.89                                      | na   | IVL 2004        |

Notes: GT – gas turbine; STM – steam boiler

Fuel consumption efficiency improvements associated with Tier I and II engines is taken into account and further explained in the SFOC variability with load section below.

It should be noted that NO<sub>x</sub> emissions are not affected by fuel sulphur content but do change slightly between HFO and distillate fuels. For further information on specific emissions factors, FCFs and references, see Annex 6.

### SO<sub>x</sub> baseline

For all three ship emissions sources, SO<sub>x</sub> emissions are directly linked to the sulphur content of the fuel consumed. For emission estimating purposes, the typical fuel types (based on ISO 8217 definitions) include:

- heavy fuel oil (HFO)/intermediate fuel oil (IFO);
- marine diesel oil (MDO)/marine gas oil (MGO);
- liquefied natural gas (LNG).

The SO<sub>x</sub> EF<sub>baseline</sub> factors are based on the percent sulphur content of the fuel, with 97.54% of the fuel sulphur fraction converted to SO<sub>x</sub> (IVL 2004), while the remaining fraction is emitted as a PM sulphate component. Therefore, SO<sub>x</sub> and PM emissions are directly tied to the sulphur content of the fuel consumed. This study used the following SO<sub>x</sub> EF<sub>baseline</sub> factors, based on 2.7% sulphur content HFO. The EF<sub>baseline</sub> factors for SO<sub>x</sub> are presented in Table 42. It should be noted that SO<sub>x</sub> and SO<sub>2</sub> are basically interchangeable for marine-related engine emissions.

**Table 42 SO<sub>x</sub> baseline emissions factors.**

| Eng speed/ type | Fuel <sup>1</sup> type | ME EF <sub>baseline</sub> (kg/tonne fuel) | Aux eng EF <sub>baseline</sub> (kg/tonne fuel) | Reference                 |
|-----------------|------------------------|---|--|---------------------------|
| SSD             | HFO                    | 52.77                                     | na   | Mass balance <sup>2</sup> |
| MSD             | HFO                    | 52.79                                     | 52.78  | Mass balance <sup>2</sup> |
| HSD             | HFO                    | na  | 52.78  | Mass balance <sup>2</sup> |
| Otto            | LNG                    | 0.02                                      | 0.02   | Kunz & Gorse 2013         |
| GT              | HFO                    | 52.79                                     | na   | Mass balance <sup>2</sup> |
| STM             | HFO                    | 52.79                                     | na   | Mass balance <sup>2</sup> |

Notes: <sup>1</sup>assumes HFO fuel with 2.7% sulphur content

<sup>2</sup>assumes 97.54% of sulphur fraction is converted to SO<sub>x</sub>; remainder is converted to PM SO<sub>4</sub>

These baseline emission factors are adjusted using FCF to account for the changing annual fuel sulphur content world averages (2007–2012) or as required regionally within an ECA. The global sulphur content of marine fuels was modelled according to IMO global sulphur monitoring reports, as presented in Table 34. For regional variations driven by regulation (ECAs), the fuel sulphur content is assumed to be equivalent to the minimum regulatory requirement (see the description in Section 1.2. on how the shipping activity is attributed to different global regions). Further regional variations of fuel sulphur content were not taken into account due to the complexity associated with points of purchase of fuel and where and when it is actually burned. It is assumed that the world average is representative across the world fleet for each year.

**Table 43 Annual fuel sulphur worldwide averages.**

| Fuel type | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 |
|-----------|------|------|------|------|------|------|
| HFO/IFO   | 2.42 | 2.37 | 2.6  | 2.61 | 2.65 | 2.51 |
| MDO/MGO   | 0.15 | 0.15 | 0.15 | 0.15 | 0.14 | 0.14 |

For further information on specific emissions factors, FCFs and references, see Annex 6.

### PM baseline

The current literature contains a rather large variation of PM emissions factors, which vary significantly between studies because of differences in methodology, sampling and analysis



techniques. The United States Environmental Protection Agency (USEPA) and the California Air Resources Board (CARB) evaluated the available PM test data and determined that along with direct PM there is secondary PM associated with the sulphur in fuel (2.46% fuel sulphur fraction is converted to secondary PM while the remainder is emitted as SO<sub>x</sub>, as discussed previously). This study used the following PM EF<sub>baseline</sub> factors based on 2.7% sulphur content HFO. The EF<sub>baseline</sub> factors for PM are presented in Table 44. It should be noted there is virtually no difference between total PM and PM less than 10 microns or PM<sub>10</sub> for diesel-based fuels.

**Table 44 PM baseline emissions factors.**

| Eng speed/<br>type | Fuel <sup>1</sup><br>type | ME EF <sub>baseline</sub><br>(kg/tonne fuel) | Aux eng EF <sub>baseline</sub><br>(kg/tonne fuel) | Reference       |
|--------------------|---------------------------|--|---|-----------------|
| SSD                | HFO                       | 7.28   | na  | USEPA 2007      |
| MSD                | HFO                       | 6.65   | 6.34  | USEPA 2007      |
| HSD                | HFO                       | na   | 6.34  | USEPA 2007      |
| Otto               | LNG                       | 0.18   | 0.18  | Kristensen 2012 |
| GT                 | HFO                       | 0.20   | na  | IVL 2004        |
| STM                | HFO                       | 3.05   | na  | IVL 2004        |

Notes: <sup>1</sup>assumes HFO fuel with 2.7% sulphur content

The approach taken in this study is compatible with the IMO GHG Study 2009, which defined PM as substances including sulphate, water associated with sulphate ash and organic carbons, measured by dilution method. Therefore, the model can accommodate changes in fuel sulphur content. This reflects the changes in PM emission factors arising from ECAs as defined in IMO MARPOL Annex VI.

For further information on specific emissions factors, FCFs and references, see Annex 6.

### CO baseline

Emissions of carbon monoxide (CO) were determined by methods originally described in Sarvi et al. (2008), Kristensen 2012 and IVL 2004. From these sources the CO EF<sub>baseline</sub> factors presented in Table 45 were used.

**Table 45 CO baseline emissions factors.**

| Eng speed/<br>type | Fuel<br>type | ME EF <sub>baseline</sub><br>(kg/tonne fuel) | Aux eng EF <sub>baseline</sub><br>(kg/tonne fuel) | Reference       |
|--------------------|--------------|--|---|-----------------|
| SSD                | HFO          | 2.77   | na  | USEPA 2007      |
| MSD                | HFO          | 2.51   | 2.38  | USEPA 2007      |
| HSD                | HFO          | na   | 2.38  | USEPA 2007      |
| Otto               | LNG          | 7.83   | 7.83  | Kristensen 2012 |
| GT                 | HFO          | 0.33   | na  | IVL 2004        |
| STM                | HFO          | 0.66   | na  | IVL 2004        |

It should be noted that CO emissions are also unaffected by the sulphur content of the fuel burned and are the same for HFO and distillates. For further information on specific emissions factors and references, see Annex 6.

### CH<sub>4</sub> baseline

Emissions of methane (CH<sub>4</sub>) were determined by analysis of test results reported in IVL (2004) and MARINTEK (2010). Methane emissions factors for diesel-fuelled engines, steam boilers and gas turbine are taken from IVL 2004, which states that CH<sub>4</sub> emissions are approximately 2% magnitude of VOC. Therefore, the EF<sub>baseline</sub> is derived by multiplying the NMVOC EF<sub>baseline</sub>

by 2%. The emissions factor for LNG Otto-cycle engines is 8.5g/kWh, which is on par with the data for LNG engines (MARINTEK 2010, 2014). However, this value may be slightly low for older gas-fuelled engines, especially if run on low engine loads, and slightly high for the latest generation of LNG engines (Wartsila 2011). This emissions factor was used in the bottom-up approach to determine the amount of methane released to the atmosphere from each of the vessels powered by LNG. The majority of LNG-powered engines operating during the 2007–2012 time frame are assumed to be Otto-cycle; all LNG engines have been modelled as low-pressure, spark injection Otto-cycle engines, which have low NO<sub>x</sub> emissions. From these sources, the CH<sub>4</sub> EF<sub>baseline</sub> factors presented in Table 46 were used.

**Table 46 CH<sub>4</sub> baseline emissions factors.**

| Eng speed/<br>type | Fuel type | ME EF <sub>baseline</sub><br>(kg/tonne fuel) | Aux eng EF <sub>baseline</sub><br>(kg/tonne fuel) | Reference     |
|--------------------|-----------|--|---|---------------|
| SSD                | HFO       | 0.06   | na  | IVL 2004      |
| MSD                | HFO       | 0.05   | 0.04  | IVL 2004      |
| HSD                | HFO       | na   | 0.04  | IVL 2004      |
| Otto               | LNG       | 51.2   | 51.2  | MARINTEK 2010 |
| GT                 | HFO       | 0.01   | na  | IVL 2004      |
| STM                | HFO       | 0.01   | na  | IVL 2004      |

It should be noted that CH<sub>4</sub> emissions are also unaffected by the sulphur content of the fuel burned and are the same for HFO and distillates. For further information on specific emissions factors and references, see Annex 6.

#### N<sub>2</sub>O baseline

Emissions factors for N<sub>2</sub>O and LNG were taken from the USEPA 2014 report on GHGs and Kunz & Gorse 2013, respectively. The LNG N<sub>2</sub>O EF baseline was converted from g/mmBTU to g/kWh assuming 38% engine efficiency, and then converted to grams N<sub>2</sub>O per gram fuel using an SFOC of 166g fuel/kWh. From these sources, the N<sub>2</sub>O EF<sub>baseline</sub> factors presented in Table 47 were used.

**Table 47 N<sub>2</sub>O baseline emissions factors.**

| Eng speed/<br>type | Fuel type | ME EF <sub>baseline</sub><br>(kg/tonne fuel) | Aux eng EF <sub>baseline</sub><br>(kg/tonne fuel) | Reference         |
|--------------------|-----------|--|---|-------------------|
| SSD                | HFO       | 0.16   | na  | USEPA 2014        |
| MSD                | HFO       | 0.16   | 0.16  | USEPA 2014        |
| HSD                | HFO       | na   | 0.16  | USEPA 2014        |
| Otto               | LNG       | 0.11   | 0.11  | Kunz & Gorse 2013 |
| GT                 | HFO       | 0.16   | na  | USEPA 2014        |
| STM                | HFO       | 0.16   | na  | USEPA 2014        |

It should be noted that similar to NO<sub>x</sub>, N<sub>2</sub>O emissions are unaffected by fuel sulphur content but do change slightly between HFO and distillate fuels. For further information on specific emissions factors, FCFs and references, see Annex 6.

#### NM VOC baseline

Emissions factors for nonmethane volatile organic compounds (NMVOC) were taken from ENTEC 2002 study and for LNG from Kristensen 2012 report. The LNG NMVOC emission factor was conservatively assumed to be the same as the hydrocarbon emission factor. From these sources, the following NMVOC EF<sub>baseline</sub> factors were used for this study and presented in Table 48. It should be noted that NMVOCs and non-methane HC have the same emission factors.

Table 48: NMVOC baseline emissions factors.

| Eng speed/type | Fuel type | ME EF <sub>baseline</sub> (kg/tonne fuel) | Aux eng EF <sub>baseline</sub> (kg/tonne fuel) | Reference       |
|----------------|-----------|---|--|-----------------|
| SSD            | HFO       | 3.08                                      | na   | ENTEC 2002      |
| MSD            | HFO       | 2.33                                      | 1.76   | ENTEC 2002      |
| HSD            | HFO       | Na  | 1.76   | ENTEC 2002      |
| Otto           | LNG       | 3.01                                      | 3.01   | Kristensen 2012 |
| GT             | HFO       | 0.33                                      | na   | ENTEC 2002      |
| STM            | HFO       | 0.33                                      | na   | ENTEC 2002      |

NMVOC emissions are also unaffected by the sulphur content of the fuel burned and are the same for HFO and distillates. For further information on specific emissions factors and references, see Annex 6.

### SFOC variability with load

Marine diesel engines have been optimized to work within a designated load range, in which fuel economy and engine emissions are balanced. Optimising for fuel economy will lead to higher NO<sub>x</sub> emissions and vice versa; IMO MARPOL Annex VI Tiers thus indirectly regulate the specific fuel consumption range of the engine. Using an MDO outside the optimum load range (usually 85–100% MCR) will lead to higher specific fuel consumption per power unit (g/kWh) unless the electronic engine control unit can adjust the engine accordingly (valve timing, fuel injection). This is possible to achieve with modern smart engine control units by changing the engine control programming but for older mechanical setups greater effort may be required from the engine manufacturer. For slow steaming purposes, the optimum working load range of a diesel engine can be adjusted to be lower than the default load range.

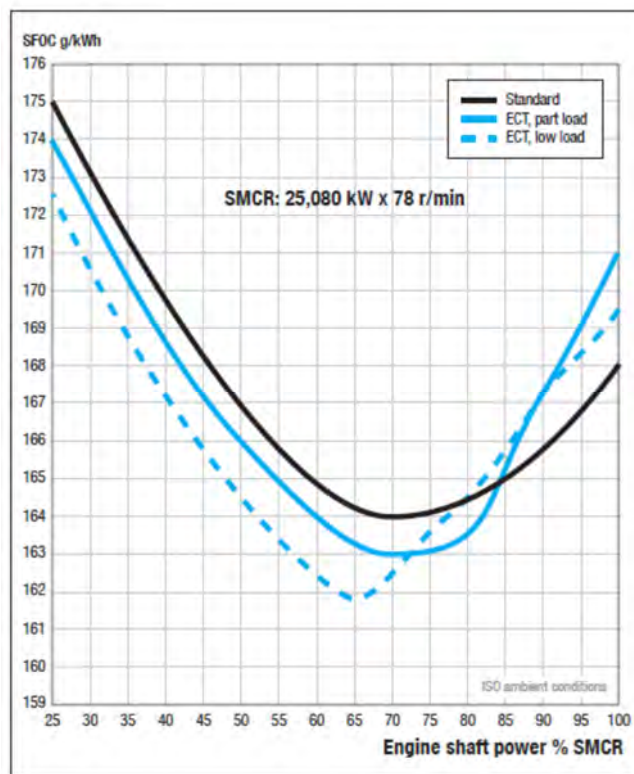


Figure 72 Impact of engine control parameter changes (ECT) to specific fuel oil consumption during low load operation of MAN 6S80ME-C8.2. Standard tuning is shown by the solid black line, part load optimisation by the solid blue line and low load tuning by the broken line (from MAN 2012).

The changes in specific fuel consumption of a large two-stroke engine are illustrated in Figure 72. It is possible to achieve a lower optimum load range for the purpose of slow steaming but this will make the engine less efficient in the high load range.

SFOC assumptions used in this study for marine diesel engines

Engines are classified as SSD, MSD and HSD and assigned SFOC or BSFC in accordance with the IMO GHG Study 2009.

**Table 49 Specific fuel oil consumption of marine diesel engines (II values in g/kWh).**

| Engine age  | SSD | MSD | HSD |
|-------------|-----|-----|-----|
| before 1983 | 205 | 215 | 225 |
| 1984–2000   | 185 | 195 | 205 |
| post 2001   | 175 | 185 | 195 |

Table 49 gives the values used in this study. Main engines are typically SSD and MSD while auxiliary engines are typically MSD and HSD. The SFOC data for turbine machinery, boilers and auxiliary engines are listed in Table 50.

**Table 50 Specific fuel oil consumption (SFOC<sub>base</sub>) of gas turbines, boiler and auxiliary engines used in this study as the basis to estimate dependency of SFOC as a function of load. Unit is grams of fuel used per power unit (g/kWh) (IVL 2004).**

| Engine type      | RFO | MDO/MGO |
|------------------|-----|---------|
| Gas turbine      | 305 | 300     |
| Steam boiler     | 305 | 300     |
| Auxiliary engine | 225 | 225     |

The values in Table 49 and Table 50 represent the lowest point in the SFOC/load curve illustrated in Figure 72. In this study each MDO engine is assumed to maintain a parabolic dependency on engine load, which has been applied to SSD/MSD/HSD engines. This approach is described further in Jalkanen et al. (2012). The changes of SFOC as a function of engine load are computed using the base values in Table 49 and a parabolic representation of changes over the whole engine load range.

$$SFOC(load) = SFOC_{base} * (0.455 * load^2 - 0.71 * load + 1.28) \quad \text{Eq. (3)}$$

In equation (3), engine load range (0–1) adjusts the base value of SFOC and describes the SFOC as a function of the engine load. This provides a mechanism that will increase SFOC on low engine loads (see Table 49) and allow the energy-based (grams of emissions per grams of fuel) and power-based (grams of emissions per kWh used) emissions factors to be linked. Different curves are used for SSD, MSD and HSD, depending on the values in Table 49, but all diesel engines use identical load dependency across the whole load range (0–100%) in this study. The default engine tuning is assumed (SFOC lowest at 80% engine load) for all diesel engines because it was not possible to determine the low load optimisations from the IHS Fairplay data.

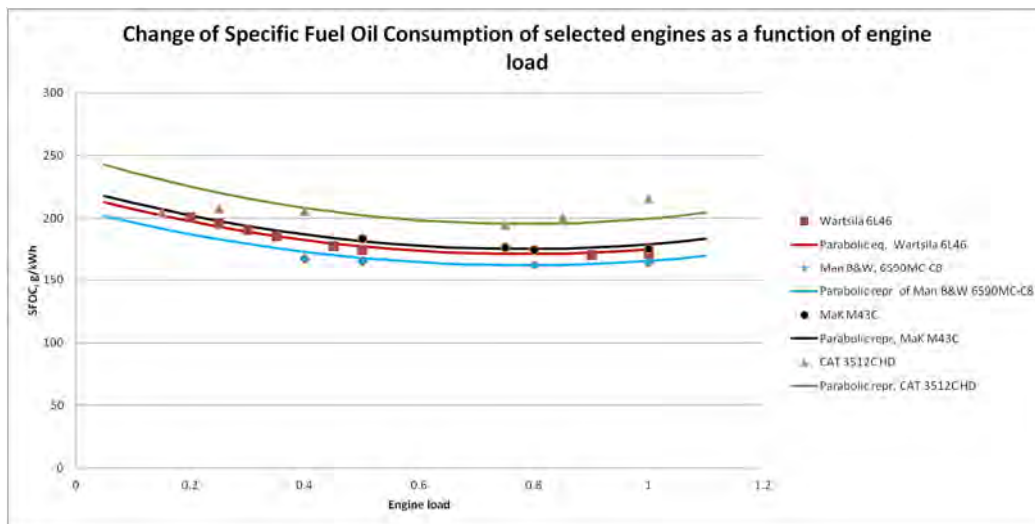


Figure 73 Impact of engine load on brake-specific fuel consumption of various selected SSD, MSD and HSD engines (emissions factors by engine type).

Figure 73 illustrates the change of SFOC as a function of engine load for a large two-stroke engine (31620kW, MAN 6S90MC-C8), two medium-size four-stroke engines (6000kW, Wartsila 6L46; 6000kW MaK M43C) and a small four-stroke engine (1700kW, CAT 3512C HD). The methodology used in this study allows SFOC changes of approximately 28% above the optimum engine load range.

#### Load dependency of SFOC in the case of a gas turbine

There is only a limited amount of information available about the load dependency and fuel economy of gas turbines. In this study, gas turbine SFOC load dependency was not modelled and the values in and was used throughout the whole engine load range.

#### SFOC of auxiliary boilers

In this study, a constant value of 305g/kWh SFOC was used for auxiliary boilers.

#### SFOC of auxiliary engines

A constant value for auxiliary engine SFOC is used (indicated in Table 50). The load/SFOC dependency was not used for auxiliary engines, because the engine load of operational auxiliary engines is usually adjusted by switching multiple engines on or off. The optimum working range of auxiliary engines is thus maintained by the crew and it is not expected have large variability, in contrast to the main engine load.

#### CO<sub>2</sub>

The power-based CO<sub>2</sub> emissions factors for main, auxiliary and boiler engines at slow, medium and high speeds were taken from either ENTEC (2002) or IVL (2004) and were converted to mass-based factors using the corresponding SFOC.

#### NO<sub>x</sub>

The NO<sub>x</sub> emissions factors for main and auxiliary engines at slow, medium and high speeds were assigned according to the three IMO NO<sub>x</sub> Tiers defined in MARPOL Annex VI. Emissions for Tier 0 engines (constructed before 2000) were modelled in accordance with Starcrest (2013). This approach will give an energy-based emissions factor as a function of engine RPM. The SFOC corresponding to the energy-based emissions factor provided a link between the energy- and fuel-based emissions factors. NO<sub>x</sub> EF for boilers remains the same, as there are no emissions standards that apply to boiler emissions.

## SO<sub>x</sub>

For all three emissions sources, SO<sub>x</sub> emissions are directly linked to the sulphur content of the fuel consumed. For emissions estimating purposes, the typical fuel types (based on ISO 8217 definitions) include HFO, IFO, MDO and MGO.

The emissions factor for SO<sub>x</sub> was determined directly from fuel sulphur content by assuming conversion of fuel sulphur to gaseous SO<sub>2</sub> according to

$$EF(SO_x) = SFOC * 2 * 0.97753 * fuel\_sulphur\_content \quad \text{Eq. (4)}$$

Equation 4 includes a constant indicating that approximately 98% of the fuel sulphur will be converted to gaseous SO<sub>2</sub> and that about 2% of the sulphur can be found in particulate matter (SO<sub>4</sub>) (IVL 2004). In order to obtain the mass-based emissions factors from the power-based factors given by equation 4 division with SFOC was made. The SFOC was obtained from the SFOC<sub>base</sub> after adjusting with the load dependency (Eq. 3).

The global sulphur content of marine fuels was modelled according to IMO global sulphur monitoring reports, as shown in Table 51. For regional variations driven by regulation (ECAs), the fuel sulphur content is assumed to be equivalent to the minimum regulatory requirement (see the description in Section 1.2 on how shipping activity is attributed to different global regions).

**Table 51 Annual fuel sulphur worldwide averages.**

| Fuel type | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 |
|-----------|------|------|------|------|------|------|
| HFO/IFO   | 2.42 | 2.37 | 2.6  | 2.61 | 2.65 | 2.51 |
| MDO/MGO   | 0.15 | 0.15 | 0.15 | 0.15 | 0.14 | 0.14 |

## PM

The current literature contains a large range of PM emissions factors, which vary significantly between studies because of differences in methodology, sampling and analysis techniques. Again, the approach taken in the current study is compatible with the IMO GHG Study 2009, which defined PM as substances including sulphate, water associated with sulphate ash and organic carbons, measured by dilution method. Therefore, the model can accommodate changes in fuel sulphur content. This reflects the changes in PM emissions factors arising from ECAs as defined in IMO MARPOL Annex VI. For main engines PM was adjusted for low engine loads (<20%) as described in Starcrest (2013).

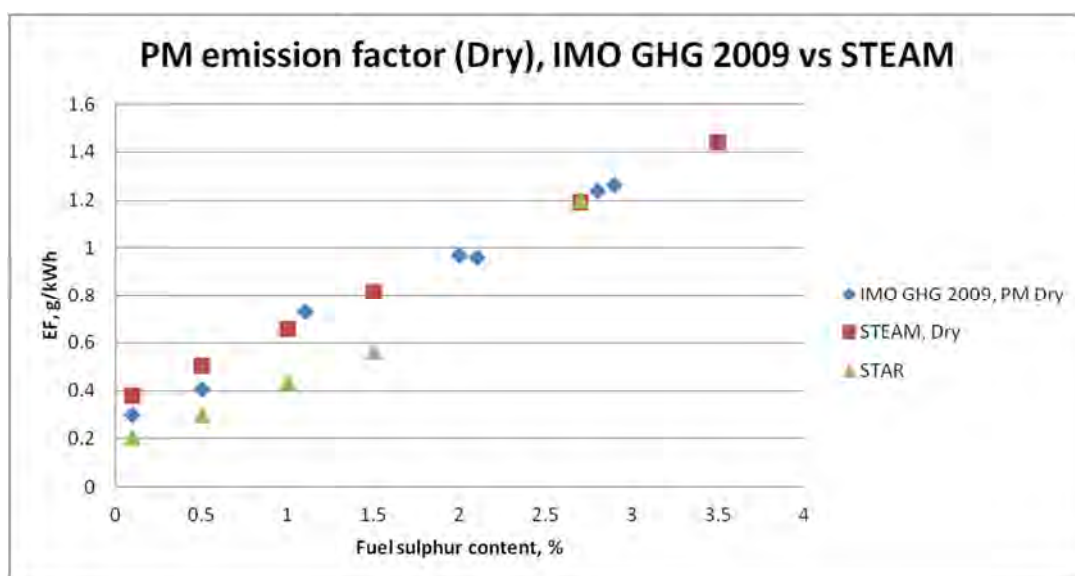


Figure 74 Comparison of PM emissions factors reported in IMO GHG Study 2009 [blue diamond] (Figure 7.7, based on data from Germanischer Lloyd) with values of Jalkanen et al. (2012) [red square] and with Starcrest (2013) [green triangle].

## CO

Emissions of CO were determined by method originally described in Sarvi et al. (2008) and included in Jalkanen et al. (2012). The methodology describing transient engine loads and their changes were not used and all CO emissions factors represent steady-state operation and emissions. For main engines PM was adjusted for low engine loads (<20%) as described in Starcrest (2013).

## CH<sub>4</sub>

The power-based CH<sub>4</sub> emissions factors for main, auxiliary and boiler engines at slow, medium and high speeds were taken from ENTEC (2002) and were converted to mass-based factors using the corresponding SFOC. The main engine CH<sub>4</sub> emission factors are further adjusted at low load (<20%) using engine load adjustment as reported in the Port of Long Beach Emission Inventory for year 2011 (Starcrest 2013). The mass-based factors are further adjusted for various loads dependent on SFOC, as described in Jalkanen et al. (2012).

## N<sub>2</sub>O

Emissions factors for N<sub>2</sub>O for main, auxiliary and boiler engines were taken from the ENTEC study (2002). For main engines the factors were adjusted for low engine loads (<20%) as described in Starcrest (2013). As for CH<sub>4</sub>, conversion from power-based to fuel-based emissions factors was carried out. In addition, the mass-based factors are adjusted for various loads dependent on SFOC as described in Jalkanen et al. (2012, (see Table 23 and Figure 35).

## NM VOC

Emissions factors for NMVOC for main, auxiliary and boiler engines were taken from the ENTEC study (2002) and for main engines were adjusted for low engine loads (<20%) as described in Starcrest (2013). As for CH<sub>4</sub>, conversion from power-based to fuel-based emissions factors was carried out. In addition, the mass-based factors are adjusted for various loads dependent on SFOC as described in Jalkanen et al. (2012) (see Figure 72).

### 2.3. Other relevant substances emissions inventories for 2007–2012

This section presents summary tables of top-down and bottom-up results for other substances besides CO<sub>2</sub> that are emitted from ships. Section 2.4.3 presents top-down and bottom-up inventory results graphically.

This section groups these tables (52–67) as follows:

- top-down fuel consumption (repeated from earlier sections);
- top-down GHG totals, including CH<sub>4</sub> and N<sub>2</sub>O;
- top-down pollutant emission inventories, including SO<sub>x</sub>, NO<sub>x</sub>, PM, CO and NMVOC;
- bottom-up fuel consumption (repeated from earlier sections);
- bottom-up GHG totals, including CH<sub>4</sub> and N<sub>2</sub>O;
- bottom-up pollutant emission inventories, including SO<sub>x</sub>, NO<sub>x</sub>, PM, CO and NMVOC.

### 2.3.1. Top-down fuel inventories

Table 52 Top-down fuel consumption inventory (million tonnes).

| Marine sector                | Fuel type | 2007          | 2008          | 2009          | 2010          | 2011          |
|------------------------------|-----------|---------------|---------------|---------------|---------------|---------------|
| International marine bunkers | HFO       | 174.1         | 177           | 165.9         | 178.9         | 177.9         |
|                              | MDO       | 26            | 22.7          | 24.9          | 28.2          | 29.6          |
|                              | NG        | 0             | 0             | 0             | 0             | 0             |
| <b>International total</b>   |           | <b>200.1</b>  | <b>199.7</b>  | <b>190.8</b>  | <b>207.1</b>  | <b>207.5</b>  |
| Domestic navigation          | HFO       | 19.9          | 14.2          | 15.3          | 14.3          | 12.7          |
|                              | MDO       | 22.7          | 23.9          | 23.6          | 25.7          | 27.4          |
|                              | NG        | 0.04          | 0.05          | 0.05          | 0.05          | 0.07          |
| <b>Domestic total</b>        |           | <b>42.64</b>  | <b>38.15</b>  | <b>38.95</b>  | <b>40.05</b>  | <b>40.17</b>  |
| Fishing                      | HFO       | 1.1           | 1.1           | 1             | 0.8           | 0.8           |
|                              | MDO       | 5.4           | 4.9           | 5             | 5.2           | 5.1           |
|                              | NG        | 0.04          | 0.02          | 0.04          | 0.02          | 0.05          |
| <b>Fishing total</b>         |           | <b>6.54</b>   | <b>6.02</b>   | <b>6.04</b>   | <b>6.02</b>   | <b>5.95</b>   |
| <b>Total</b>                 |           | <b>249.28</b> | <b>243.87</b> | <b>235.79</b> | <b>253.17</b> | <b>253.62</b> |



### 2.3.2. Top-down GHG inventories

Table 53 Top-down CH<sub>4</sub> emissions estimates (tonnes).

| Marine sector                | Fuel type | 2007          | 2008          | 2009          | 2010          | 2011          |
|------------------------------|-----------|---------------|---------------|---------------|---------------|---------------|
| International marine bunkers | HFO       | 10,446        | 10,620        | 9,954         | 10,734        | 10,674        |
|                              | MDO       | 1,560         | 1,362         | 1,494         | 1,692         | 1,776         |
|                              | NG        | 0             | 0             | 0             | 0             | 0             |
| <b>International total</b>   |           | <b>12,006</b> | <b>11,982</b> | <b>11,448</b> | <b>12,426</b> | <b>12,450</b> |
| Domestic navigation          | HFO       | 1,194         | 852           | 918           | 858           | 762           |
|                              | MDO       | 1,362         | 1,434         | 1,416         | 1,542         | 1,644         |
|                              | NG        | 2,048         | 2,560         | 2,560         | 2,560         | 3,584         |
| <b>Domestic total</b>        |           | <b>4,604</b>  | <b>4,846</b>  | <b>4,894</b>  | <b>4,960</b>  | <b>5,990</b>  |
| Fishing                      | HFO       | 66            | 66            | 60            | 48            | 48            |
|                              | MDO       | 324           | 294           | 300           | 312           | 306           |
|                              | NG        | 2,048         | 1,024         | 2,048         | 1,024         | 2,560         |
| <b>Fishing total</b>         |           | <b>2,438</b>  | <b>1,384</b>  | <b>2,408</b>  | <b>1,384</b>  | <b>2,914</b>  |
| <b>Total</b>                 |           | <b>19,048</b> | <b>18,212</b> | <b>18,750</b> | <b>18,770</b> | <b>21,354</b> |

Table 54 Top-down N<sub>2</sub>O emissions estimates (tonnes).

| Marine sector                | Fuel type | 2007          | 2008          | 2009          | 2010          | 2011          |
|------------------------------|-----------|---------------|---------------|---------------|---------------|---------------|
| International marine bunkers | HFO       | 27,856        | 28,320        | 26,544        | 28,624        | 28,464        |
|                              | MDO       | 3,900         | 3,405         | 3,735         | 4,230         | 4,440         |
|                              | NG        | 0             | 0             | 0             | 0             | 0             |
| <b>International total</b>   |           | <b>31,756</b> | <b>31,725</b> | <b>30,279</b> | <b>32,854</b> | <b>32,904</b> |
| Domestic navigation          | HFO       | 3,184         | 2,272         | 2,448         | 2,288         | 2,032         |
|                              | MDO       | 3,405         | 3,585         | 3,540         | 3,855         | 4,110         |
|                              | NG        | 4             | 6             | 6             | 6             | 8             |
| <b>Domestic total</b>        |           | <b>6,593</b>  | <b>5,863</b>  | <b>5,994</b>  | <b>6,149</b>  | <b>6,150</b>  |
| Fishing                      | HFO       | 176           | 176           | 160           | 128           | 128           |
|                              | MDO       | 810           | 735           | 750           | 780           | 765           |
|                              | NG        | 4             | 2             | 4             | 2             | 6             |
| <b>Fishing total</b>         |           | <b>990</b>    | <b>913</b>    | <b>914</b>    | <b>910</b>    | <b>899</b>    |
| <b>Total</b>                 |           | <b>39,340</b> | <b>38,501</b> | <b>37,187</b> | <b>39,913</b> | <b>39,952</b> |

### 2.3.3. Top-down pollutant emission inventories

Table 55 Top-down SO<sub>x</sub> emissions estimates (thousand tonnes as SO<sub>2</sub>).

| Marine sector                | Fuel type | 2007         | 2008         | 2009         | 2010          | 2011          |
|------------------------------|-----------|--------------|--------------|--------------|---------------|---------------|
| International marine bunkers | HFO       | 8,268        | 8,220        | 8,404        | 9,158         | 9,199         |
|                              | MDO       | 69           | 60           | 66           | 74            | 78            |
|                              | NG        | 0            | 0            | 0            | 0             | 0             |
| <b>International total</b>   |           | <b>8,337</b> | <b>8,280</b> | <b>8,470</b> | <b>9,232</b>  | <b>9,277</b>  |
| Domestic navigation          | HFO       | 945          | 659          | 775          | 732           | 657           |
|                              | MDO       | 60           | 63           | 62           | 68            | 72            |
|                              | NG        | 0            | 0            | 0            | 0             | 0             |
| <b>Domestic total</b>        |           | <b>1,005</b> | <b>723</b>   | <b>837</b>   | <b>800</b>    | <b>729</b>    |
| Fishing                      | HFO       | 52           | 51           | 51           | 41            | 41            |
|                              | MDO       | 14           | 13           | 13           | 14            | 13            |
|                              | NG        | 0            | 0            | 0            | 0             | 0             |
| <b>Fishing total</b>         |           | <b>66</b>    | <b>64</b>    | <b>64</b>    | <b>55</b>     | <b>55</b>     |
| <b>Total</b>                 |           | <b>9,408</b> | <b>9,066</b> | <b>9,371</b> | <b>10,087</b> | <b>10,061</b> |

Table 56 Top-down NO<sub>x</sub> emissions estimates (thousand tonnes as NO<sub>2</sub>).

| Marine sector                | Fuel type | 2007          | 2008          | 2009          | 2010          | 2011          |
|------------------------------|-----------|---------------|---------------|---------------|---------------|---------------|
| International marine bunkers | HFO       | 16,191        | 16,461        | 15,429        | 16,638        | 16,545        |
|                              | MDO       | 2,269         | 1,981         | 2,173         | 2,460         | 2,583         |
|                              | NG        | 0             | 0             | 0             | 0             | 0             |
| <b>International total</b>   |           | <b>18,460</b> | <b>18,442</b> | <b>17,601</b> | <b>19,098</b> | <b>19,127</b> |
| Domestic navigation          | HFO       | 1,851         | 1,321         | 1,423         | 1,330         | 1,181         |
|                              | MDO       | 1,981         | 2,085         | 2,059         | 2,242         | 2,391         |
|                              | NG        | 0             | 0             | 0             | 0             | 1             |
| <b>Domestic total</b>        |           | <b>3,832</b>  | <b>3,406</b>  | <b>3,482</b>  | <b>3,573</b>  | <b>3,572</b>  |
| Fishing                      | HFO       | 102           | 102           | 93            | 74            | 74            |
|                              | MDO       | 471           | 428           | 436           | 454           | 445           |
|                              | NG        | 0             | 0             | 0             | 0             | 0             |
| <b>Fishing total</b>         |           | <b>574</b>    | <b>530</b>    | <b>530</b>    | <b>528</b>    | <b>520</b>    |
| <b>Total</b>                 |           | <b>22,865</b> | <b>22,378</b> | <b>21,613</b> | <b>23,199</b> | <b>23,219</b> |

Table 57 Top-down PM emissions estimates (thousand tonnes).

| Marine sector                | Fuel type | 2007         | 2008         | 2009         | 2010         | 2011         |
|------------------------------|-----------|--------------|--------------|--------------|--------------|--------------|
| International marine bunkers | HFO       | 1,191        | 1,198        | 1,183        | 1,276        | 1,283        |
|                              | MDO       | 27           | 23           | 25           | 29           | 30           |
|                              | NG        | 0            | 0            | 0            | 0            | 0            |
| <b>International total</b>   |           | <b>1,217</b> | <b>1,221</b> | <b>1,208</b> | <b>1,304</b> | <b>1,313</b> |
| Domestic navigation          | HFO       | 136          | 96           | 109          | 102          | 92           |
|                              | MDO       | 23           | 24           | 24           | 26           | 28           |
|                              | NG        | 0            | 0            | 0            | 0            | 0            |
| <b>Domestic total</b>        |           | <b>159</b>   | <b>121</b>   | <b>133</b>   | <b>128</b>   | <b>120</b>   |
| Fishing                      | HFO       | 8            | 7            | 7            | 6            | 6            |
|                              | MDO       | 6            | 5            | 5            | 5            | 5            |
|                              | NG        | 0            | 0            | 0            | 0            | 0            |
| <b>Fishing total</b>         |           | <b>13</b>    | <b>12</b>    | <b>12</b>    | <b>11</b>    | <b>11</b>    |
| <b>Total</b>                 |           | <b>1,390</b> | <b>1,354</b> | <b>1,354</b> | <b>1,444</b> | <b>1,443</b> |

Table 58 Top-down CO emissions estimates (thousand tonnes).

| Marine sector | Fuel type | 2007 | 2008 | 2009 | 2010 | 2011 |
|---------------|-----------|------|------|------|------|------|
|---------------|-----------|------|------|------|------|------|

|                              |     |              |              |              |              |              |
|------------------------------|-----|--------------|--------------|--------------|--------------|--------------|
| International marine bunkers | HFO | 482.3        | 490.3        | 459.5        | 495.6        | 492.8        |
|                              | MDO | 72.0         | 62.9         | 69.0         | 78.1         | 82.0         |
|                              | NG  | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
| <b>International total</b>   |     | <b>554.3</b> | <b>553.2</b> | <b>528.5</b> | <b>573.7</b> | <b>574.8</b> |
| Domestic navigation          | HFO | 55.1         | 39.3         | 42.4         | 39.6         | 35.2         |
|                              | MDO | 62.9         | 66.2         | 65.4         | 71.2         | 75.9         |
|                              | NG  | 0.3          | 0.4          | 0.4          | 0.4          | 0.5          |
| <b>Domestic total</b>        |     | <b>118.3</b> | <b>105.9</b> | <b>108.1</b> | <b>111.2</b> | <b>111.6</b> |
| Fishing                      | HFO | 3.0          | 3.0          | 2.8          | 2.2          | 2.2          |
|                              | MDO | 15.0         | 13.6         | 13.9         | 14.4         | 14.1         |
|                              | NG  | 0.3          | 0.2          | 0.3          | 0.2          | 0.4          |
| <b>Fishing total</b>         |     | <b>18.3</b>  | <b>16.8</b>  | <b>16.9</b>  | <b>16.8</b>  | <b>16.7</b>  |
| <b>Total</b>                 |     | <b>690.9</b> | <b>675.9</b> | <b>653.6</b> | <b>701.6</b> | <b>703.1</b> |

Table 59 Top-down NMVOC emissions estimates (thousand tonnes).

| Marine sector                | Fuel type | 2007         | 2008         | 2009         | 2010         | 2011         |
|------------------------------|-----------|--------------|--------------|--------------|--------------|--------------|
| International marine bunkers | HFO       | 536.2        | 545.2        | 511.0        | 551.0        | 547.9        |
|                              | MDO       | 80.1         | 69.9         | 76.7         | 86.9         | 91.2         |
|                              | NG        | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
| <b>International total</b>   |           | <b>616.3</b> | <b>615.1</b> | <b>587.7</b> | <b>637.9</b> | <b>639.1</b> |
| Domestic navigation          | HFO       | 61.3         | 43.7         | 47.1         | 44.0         | 39.1         |
|                              | MDO       | 69.9         | 73.6         | 72.7         | 79.2         | 84.4         |
|                              | NG        | 0.1          | 0.2          | 0.2          | 0.2          | 0.2          |
| <b>Domestic total</b>        |           | <b>131.3</b> | <b>117.5</b> | <b>120.0</b> | <b>123.4</b> | <b>123.7</b> |
| Fishing                      | HFO       | 3.4          | 3.4          | 3.1          | 2.5          | 2.5          |
|                              | MDO       | 16.6         | 15.1         | 15.4         | 16.0         | 15.7         |
|                              | NG        | 0.1          | 0.1          | 0.1          | 0.1          | 0.2          |
| <b>Fishing total</b>         |           | <b>20.1</b>  | <b>18.5</b>  | <b>18.6</b>  | <b>18.5</b>  | <b>18.3</b>  |
| Total                        |           | 767.8        | 751.1        | 726.2        | 779.8        | 781.1        |

### 2.3.4. Bottom-up Fuel inventories

Table 60 Bottom-up fuel consumption estimates (million tonnes).

| Fleet sector                            | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 |
|---|------|------|------|------|------|------|
| <b>Bottom-up international shipping</b> | 283  | 294  | 275  | 248  | 274  | 257  |
| <b>Bottom-up domestic navigation</b>    | 42   | 43   | 24   | 26   | 35   | 27   |
| <b>Bottom-up fishing</b>                | 27   | 25   | 14   | 18   | 18   | 16   |
| <b>Total bottom-up estimate</b>         | 352  | 363  | 313  | 293  | 327  | 300  |

### 2.3.5. Bottom-up GHG inventories

Table 61 Bottom-up CH<sub>4</sub> emissions estimates (tonnes).

| Fleet sector                            | 2007           | 2008           | 2009           | 2010           | 2011           | 2012           |
|---|----------------|----------------|----------------|----------------|----------------|----------------|
| <b>Bottom-up international shipping</b> | 174,370        | 193,180        | 185,980        | 234,370        | 286,480        | 286,520        |
| <b>Bottom-up domestic navigation</b>    | 1,510          | 1,570          | 770            | 1,020          | 1,180          | 1,060          |
| <b>Bottom-up fishing</b>                | 1,110          | 1,040          | 570            | 780            | 780            | 700            |
| <b>Total bottom-up estimate</b>         | <b>176,990</b> | <b>195,790</b> | <b>187,320</b> | <b>236,170</b> | <b>288,440</b> | <b>288,280</b> |

Table 62 Bottom-up N<sub>2</sub>O emissions estimates (tonnes).

| Fleet sector                            | 2007          | 2008          | 2009          | 2010          | 2011          | 2012          |
|---|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Bottom-up international Shipping</b> | 40,780        | 42,580        | 39,800        | 35,620        | 38,380        | 36,680        |
| <b>Bottom-up domestic navigation</b>    | 5,220         | 5,380         | 2,790         | 3,440         | 3,950         | 3,560         |
| <b>Bottom-up fishing</b>                | 3,930         | 3,730         | 2,100         | 2,730         | 2,730         | 2,400         |
| <b>Total bottom-up estimate</b>         | <b>49,930</b> | <b>51,690</b> | <b>44,690</b> | <b>41,790</b> | <b>45,060</b> | <b>42,640</b> |

### 2.3.6. Bottom-up pollutant inventories

Table 63 Bottom-up SO<sub>x</sub> emissions estimates (thousand tonnes as SO<sub>2</sub>).

| Fleet sector                     | 2007          | 2008          | 2009          | 2010          | 2011          | 2012          |
|----------------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Bottom-up international shipping | 10,771        | 11,041        | 11,164        | 9,895         | 10,851        | 9,712         |
| Bottom-up domestic navigation    | 278           | 331           | 202           | 251           | 358           | 268           |
| Bottom-up fishing                | 533           | 521           | 280           | 405           | 423           | 261           |
| <b>Total bottom-up estimate</b>  | <b>11,581</b> | <b>11,892</b> | <b>11,646</b> | <b>10,550</b> | <b>11,632</b> | <b>10,240</b> |

Table 64 Bottom-up NO<sub>x</sub> emissions estimates (thousand tonnes as NO<sub>2</sub>).

| Fleet sector                     | 2007          | 2008          | 2009          | 2010          | 2011          | 2012          |
|----------------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Bottom-up international shipping | 19,943        | 20,759        | 19,104        | 16,708        | 18,047        | 16,997        |
| Bottom-up domestic navigation    | 1,564         | 1,639         | 930           | 1,114         | 1,323         | 1,171         |
| Bottom-up fishing                | 1,294         | 1,242         | 722           | 935           | 940           | 834           |
| <b>Total bottom-up estimate</b>  | <b>22,801</b> | <b>23,639</b> | <b>20,756</b> | <b>18,756</b> | <b>20,310</b> | <b>19,002</b> |

Table 65 Bottom-up PM emissions estimates (thousand tonnes).

| Fleet sector                     | 2007         | 2008         | 2009         | 2010         | 2011         | 2012         |
|----------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Bottom-up international shipping | 1,493        | 1,545        | 1,500        | 1,332        | 1,446        | 1,317        |
| Bottom-up domestic navigation    | 51           | 58           | 33           | 41           | 56           | 44           |
| Bottom-up fishing                | 78           | 76           | 41           | 59           | 61           | 41           |
| <b>Total bottom-up estimate</b>  | <b>1,622</b> | <b>1,679</b> | <b>1,574</b> | <b>1,432</b> | <b>1,563</b> | <b>1,402</b> |

Table 66 Bottom-up CO emissions estimates (thousand tonnes).

| Fleet sector                     | 2007       | 2008         | 2009       | 2010       | 2011       | 2012       |
|----------------------------------|------------|--------------|------------|------------|------------|------------|
| Bottom-up international shipping | 823        | 864          | 816        | 763        | 834        | 806        |
| Bottom-up domestic navigation    | 99         | 103          | 60         | 72         | 82         | 76         |
| Bottom-up fishing                | 76         | 72           | 46         | 59         | 58         | 53         |
| <b>Total bottom-up estimate</b>  | <b>998</b> | <b>1,039</b> | <b>921</b> | <b>893</b> | <b>975</b> | <b>936</b> |

Table 67 Bottom-up NMVOC emissions estimates (thousand tonnes).

| Fleet sector                     | 2007       | 2008       | 2009       | 2010       | 2011       | 2012       |
|----------------------------------|------------|------------|------------|------------|------------|------------|
| Bottom-up international shipping | 696        | 727        | 672        | 593        | 643        | 609        |
| Bottom-up domestic navigation    | 76         | 78         | 38         | 51         | 59         | 53         |
| Bottom-up fishing                | 55         | 52         | 28         | 39         | 39         | 35         |
| <b>Total bottom-up estimate</b>  | <b>827</b> | <b>858</b> | <b>739</b> | <b>683</b> | <b>741</b> | <b>696</b> |

While these global totals differ from primary GHGs in terms of regional distribution, typical substance lifetimes and air quality impacts, NO<sub>x</sub> and SO<sub>x</sub> play indirect roles in tropospheric ozone formation and indirect aerosol warming at regional scales; moreover, ship emissions of NO<sub>x</sub> and SO<sub>x</sub> have been compared with global anthropogenic emissions.

These totals are slightly greater than reported in the IMO GHG Study 2009. The IMO GHG Study 2014 estimates multi-year (2007–2012) average annual totals of 11.3 and 20.9 million tonnes for SO<sub>x</sub> (as SO<sub>2</sub>) and NO<sub>x</sub> (as NO<sub>2</sub>) from all shipping, respectively (corresponding to 5.6 and 6.3 million tonnes converted to elemental weights for nitrogen and sulphur,

respectively). A multi-year average of international shipping results in an annual average estimate of some 10.6 and 18.6 million tonnes of SO<sub>x</sub> (as SO<sub>2</sub>) and NO<sub>x</sub> (as NO<sub>2</sub>); this converts to totals of 5.3 and 5.6 million tonnes of SO<sub>x</sub> and NO<sub>x</sub> (as elemental sulphur and nitrogen, respectively). These totals can be compared with totals reported in the IPCC's 5th Assessment Report (AR5) (IPCC 2013). Global NO<sub>x</sub> and SO<sub>x</sub> emissions from all shipping represent about 15% and 13% of global NO<sub>x</sub> and SO<sub>x</sub> from anthropogenic sources, respectively; international shipping NO<sub>x</sub> and SO<sub>x</sub> represent approximately 13% and 12% of global NO<sub>x</sub> and SO<sub>x</sub> totals, respectively. Comparisons with the AR5 report are also consistent with comparisons in peer-reviewed journal publications reporting global SO<sub>x</sub> (Smith et al. 2011) and NO<sub>x</sub> (Miyazaki et al. 2012).

Multi-year averages for PM, CO and NMVOC are calculable but are rarely compared with global totals. Moreover, the AR5 report only reports global values for CO and NMVOC, and the IPCC reports sub-substances of particulate matter such as black carbon and organic carbon. Interested readers are referred to Annex II of the AR5 report (IPCC 2013) for tables with global totals for CO (AR5 Table All.2.16), NMVOC (AR5 Table All.2.17), organic carbon (AR5 Table All.2.21), and black carbon (AR5 Table All.2.22).

## **2.4. Quality assurance and quality control of other relevant substances emissions inventories**

Because the input data and method for Sections 2.1 and 2.2 have substantial similarity to the input data and method for Sections 1.1 and Section 1.2, Section 2.4 is closely connected to Section 1.4. The two areas where there is specific additional content are in the QA/QC of the emissions factors used and in the comparison of emissions inventories obtained using the two approaches (bottom-up and top-down).

### **2.4.1. QA/QC of bottom-up emissions factors**

As stated in Section 2.2.7, the emissions factors used in the IMO GHG Study 2014 were selected by the consortium with first preference going to published IMO factors (e.g. NO<sub>x</sub> by fuel type). Other factors were selected with the unanimous agreement of the emissions factor working group based on what various members are currently using in their work. It should also be noted that emissions factors are typically derived from emissions testing results and reported as energy-based (g pollutant/kWh) factors. Both the IMO GHG Study 2009 and this study used fuel-based (g pollutant/g fuel) factors. The following observations can be made about the comparison of the two sets of emissions factors:

- The IMO GHG Study 2009 emissions factors (presented in Table 3.6) do not differentiate for various engine types (SSD, MSD, HSD, auxiliary boilers, LNG Otto, steam, gas turbine), engine tier (0, I, II) or duty cycle (propulsion, auxiliary). Exceptions to these are fuel type differentiation (CO<sub>2</sub>, SO<sub>2</sub>, NO<sub>x</sub>, PM<sub>10</sub>) and auxiliary boilers (NO<sub>x</sub>). The IMO GHG Study 2014 includes each of these differentiations and further adjusts the emissions factors based on engine load.

Since the emissions factors are significantly more detailed in the IMO GHG Study 2014, comparisons are somewhat difficult; however they are compared in Table 68.

Table 68 Comparison of emissions factors IMO GHG Study 2009 and 2014.

| Pollutant        | IMO   |             |      |           |                 | Correlation   |                        |
|------------------|-------|-------------|------|-----------|-----------------|---------------|------------------------|
|                  | Study | Engine type | Tier | Fuel type | EF <sup>1</sup> | 2014/2009 EFs | Correlation            |
| CO <sub>2</sub>  | 2009  | unk         | unk  | HFO       | 3130            |               |                        |
|                  | 2014  | all         | all  | HFO       | 3114            | 0.99          | good                   |
|                  | 2009  | unk         | unk  | MDO       | 3190            |               |                        |
|                  | 2014  | all         | all  | MDO       | 3206            | 1.01          | good                   |
| NO <sub>x</sub>  | 2009  | SSD         | 0    | ?         | 90              |               |                        |
|                  | 2014  | SSD         | 0    | HFO       | 92.82           | 1.03          | good                   |
|                  | 2009  | SSD         | 1    | ?         | 78              |               |                        |
|                  | 2014  | SSD         | 1    | HFO       | 87.18           | 1.12          | good                   |
|                  | 2009  | MSD         | 0    | ?         | 60              |               |                        |
|                  | 2014  | MSD         | 0    | HFO       | 65.12           | 1.09          | good                   |
|                  | 2009  | MSD         | 1    | ?         | 51              |               |                        |
|                  | 2014  | MSD         | 1    | HFO       | 60.47           | <b>1.19</b>   | moderate difference    |
|                  | 2009  | Boiler      | na   | ?         | 7               |               |                        |
|                  | 2014  | Boiler      | na   | HFO       | 6.89            | 0.98          | good                   |
| SO <sub>x</sub>  | 2009  | unk         | unk  | HFO 2.7%  | 54              |               |                        |
|                  | 2014  | SSD         | 0    | HFO 2.7%  | 52.77           | 0.98          | good                   |
|                  | 2014  | SSD         | 0    | HFO 2.42% | 47.49           | <b>0.88</b>   | as modelled for 2007   |
|                  | 2009  | unk         | unk  | MDO 0.5%  | 10              |               |                        |
|                  | 2014  | SSD         | 0    | MDO 0.5%  | 9.76            | 0.98          | good                   |
|                  | 2014  | SSD         | 0    | MDO 0.15% | 2.64            | <b>0.26</b>   | as modelled for 2007   |
| PM               | 2009  | unk         | unk  | HFO 2.7%  | 6.7             |               |                        |
|                  | 2014  | SSD         | 0    | HFO 2.7%  | 7.28            | 1.09          | good                   |
|                  | 2014  | SSD         | 0    | HFO 2.42% | 6.84            | 1.02          | as modelled for 2007   |
|                  | 2009  | unk         | unk  | MDO 0.5%  | 1.1             |               |                        |
|                  | 2014  | SSD         | 0    | MDO 0.5%  | 1.82            | 1.65          | significant difference |
|                  | 2014  | SSD         | 0    | MDO 0.1%  | 1.24            | <b>1.13</b>   | as modelled for 2007   |
| CO               | 2009  | unk         | unk  | unk       | 7.4             |               |                        |
|                  | 2014  | SSD         | 0    | HFO       | 2.77            | <b>0.37</b>   | significant difference |
| CH <sub>4</sub>  | 2009  | unk         | unk  | unk       | 0.3             |               |                        |
|                  | 2014  | SSD         | 0    | HFO       | 0.06            | <b>0.20</b>   | significant difference |
| N <sub>2</sub> O | 2009  | unk         | unk  | unk       | 0.08            |               |                        |
|                  | 2014  | SSD         | 0    | HFO       | 0.16            | <b>2.00</b>   | significant difference |
| NMVOC            | 2009  | unk         | unk  | unk       | 2.4             |               |                        |
|                  | 2014  | SSD         | 0    | HFO       | 3.08            | <b>1.28</b>   | significant difference |

Notes: <sup>1</sup>kg pollutant/tonne of fuel; unk = unknown; moderate difference 10–25%; significant difference >25%

In Table 68, some pollutant emissions factors do not correlate well (values in red) between the two studies and are discussed further below:

- NO<sub>x</sub> – The IMO GHG Study 2014 MSD Tier I emission factor is 19% higher than the IMO GHG Study 2009, which could be due to the assumed SFOC rates.

- SO<sub>x</sub> – The modelled IMO GHG Study 2014 SSD Tier 0 HFO emissions factors are 12% lower due to use of the annual average IMO published fuel sulphur contents (2.42% for 2007) in the IMO GHG Study 2014, compared to the 2.7% used by the IMO GHG Study 2009.
- SO<sub>x</sub> – The modelled IMO GHG Study 2014 SSD Tier 0 MDO emissions factors are 74% lower due to use of the annual average IMO published fuel sulphur contents (0.15% for 2007) in the IMO GHG Study 2014 compared to the 0.5% used by the IMO GHG Study 2009.
- PM – the modelled IMO GHG Study 2014 SSD Tier 0 MDO emission factors are 13% higher due to use of fuel correction factors as described in Section 2.2.7 and Annex 6 compares to the value developed in the IMO GHG Study 2009.
- CO – The IMO GHG Study 2014 SSD Tier 0 HFO emissions factors are 63% lower than the IMO GHG Study 2009. The 2009 study used CORINAIR emissions factors for CO, which can be traced back to the Lloyds Register report 'Marine Exhaust Emissions Research Programme' (1995). The IMO GHG Study 2014 used an updated CO emissions factor that was recently supported in the Kristensen 2012 report.
- CH<sub>4</sub> – The IMO GHG Study 2014 SSD Tier 0 HFO emissions factor is 80% lower than the IMO GHG Study 2009. The 2009 study used the IPCC 2013 emissions factor for CH<sub>4</sub>, which can be traced back to the Lloyds Register report 'Marine Exhaust Emissions Research Programme' (1995). The 2014 study used an updated CH<sub>4</sub> emissions factor. In addition to the CH<sub>4</sub> combustion product, methane is also released into the atmosphere as an unburnt fuel from engines operating on LNG Otto-cycle engines. In this report, the methane slip has been included in the methane emission inventory and an additional non-combustion emission factor has been assigned for CH<sub>4</sub> to account for this feature. For further details, see Section 2.2.6.
- N<sub>2</sub>O – The IMO GHG Study 2014 SSD Tier 0 HFO emissions factor is two times higher than the IMO GHG Study 2009. The 2009 study used CORINAIR emission factors for N<sub>2</sub>O, which can be traced back to the Lloyds Register report 'Marine Exhaust Emissions Research Programme' (1995). The IPCC guidelines state that the uncertainty of the emissions factor is as high as 140%. The IMO GHG Study 2014 used an updated N<sub>2</sub>O emissions factor.
- NMVOC – The IMO GHG Study 2014 SSD Tier 0 HFO emissions factor is 28% higher than the IMO GHG Study 2009. The 2009 study used CORINAIR emissions factors for NMVOC, which can be traced back to Lloyds Register report 'Marine Exhaust Emissions Research Programme' (1995). The IMO GHG Study 2014 used an updated NMVOC emissions factor.

#### 2.4.2. QA/QC of top-down emissions factors

The top-down emissions factors (Table 34, Section 2.1.1) are a subset of the bottom-up emissions factors and were selected as described in Section 2.2.7. They have the same correlations to the IMO GHG Study 2009 as presented in Section 2.4.1.

#### 2.4.3. Comparison of top-down and bottom-up inventories

Top-down and bottom-up time-series for each pollutant inventory are presented in Figure 75 and Figure 76, respectively. These results are provided with the same units and similar (but not identical) scales for visual comparison.

One clear difference is the trend pattern across years for some pollutants. For example, the top-down data among all pollutants remains similar. Most top-down inventories reveal a decline after 2007, through 2009 or so, and an increase in subsequent years. This can be explained because the top-down data do not include technology detail and the inventories are therefore computed using a best-judgement fleet-average emissions factor. Conversely, the bottom-up inventories can exhibit diverging patterns from one another and very different patterns from the top-down inventory trends. Whereas CO<sub>2</sub> in the bottom-up results exhibits a trend similar to SO<sub>x</sub>, NO<sub>x</sub> and PM, the pattern for CH<sub>4</sub> is increasing over the years. This is because the



number of larger vessels using LNG has increased, despite the fact that top-down statistics have not begun reporting any LNG in international sales statistics.



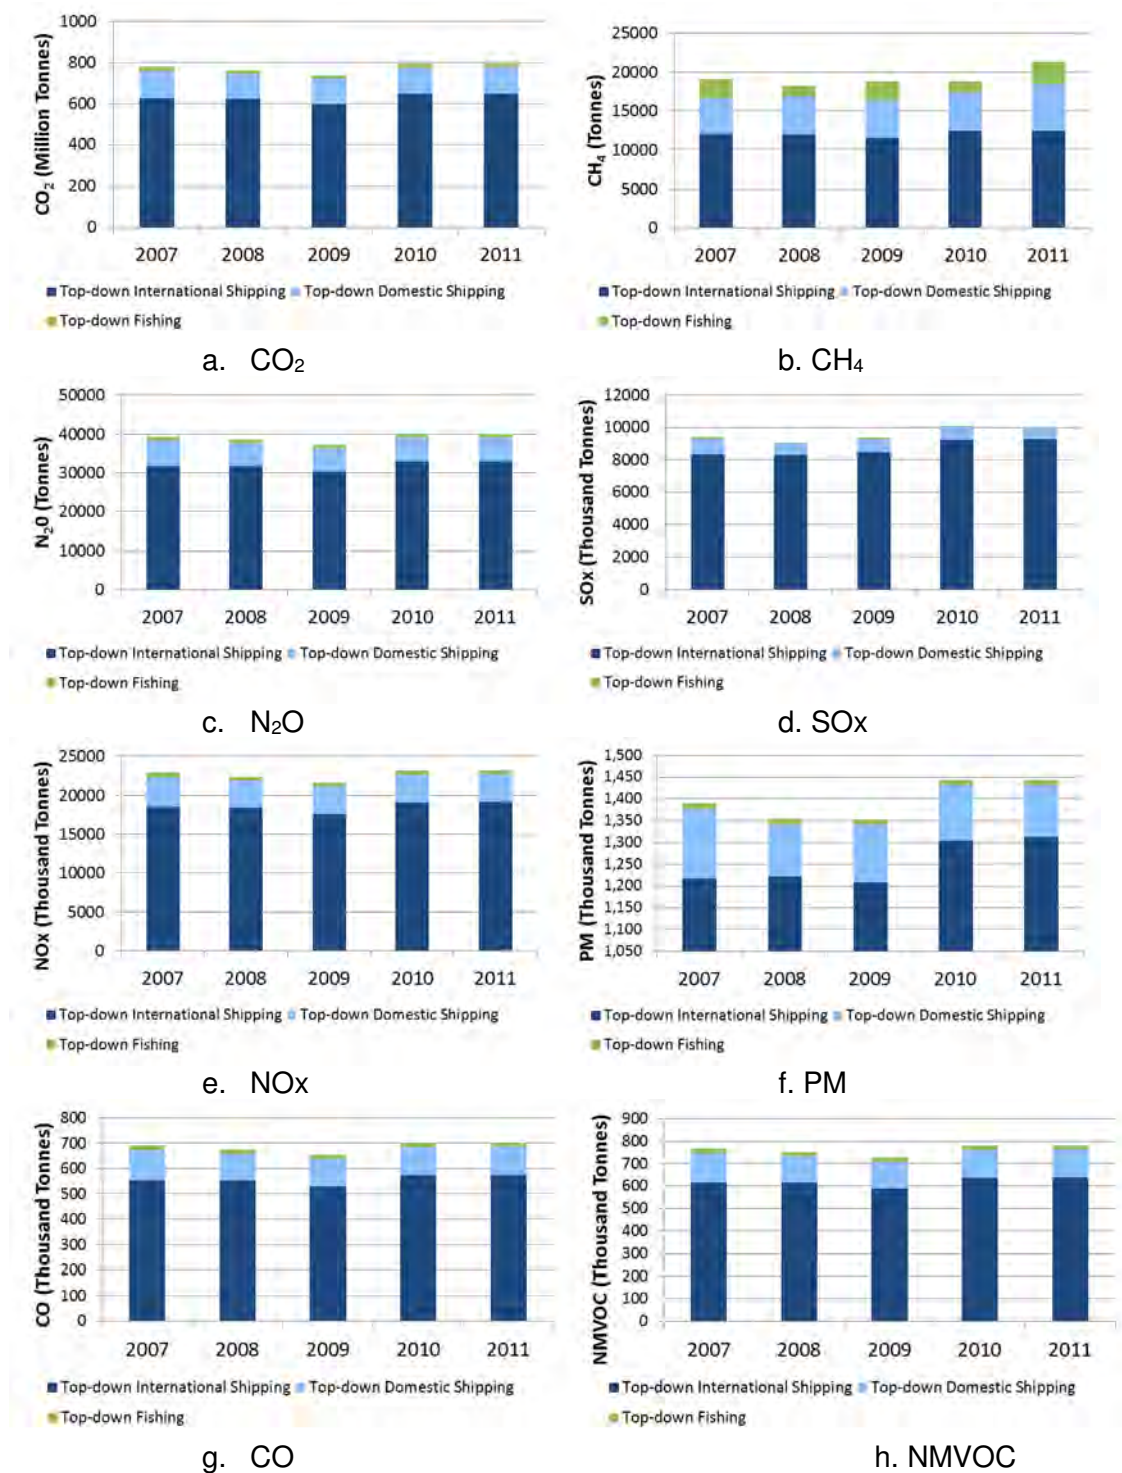



Figure 75 Time series of top-down results for a) CO<sub>2</sub>, b) CH<sub>4</sub>, c) N<sub>2</sub>O, d) SO<sub>x</sub>, e) NO<sub>x</sub>, f) PM, g) CO, and h) NMVOC, delineated by international shipping, domestic navigation and fishing.

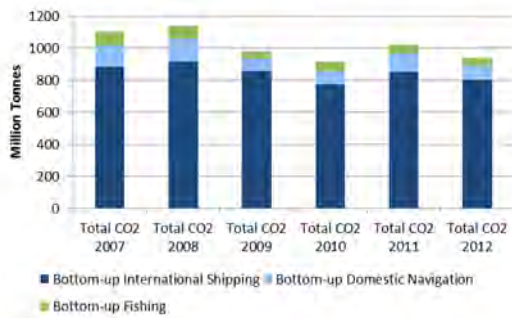


a. CO<sub>2</sub>

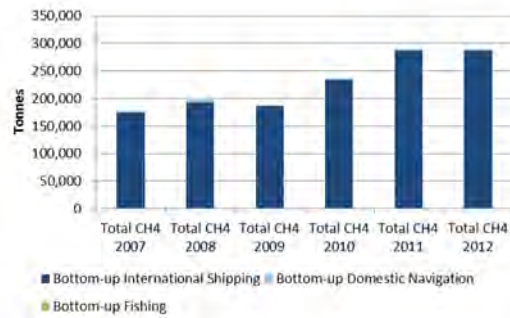


b. CH<sub>4</sub>

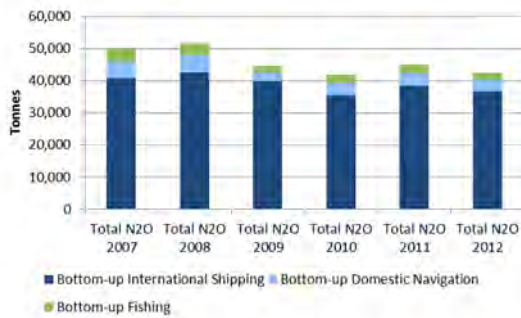


c. N<sub>2</sub>O

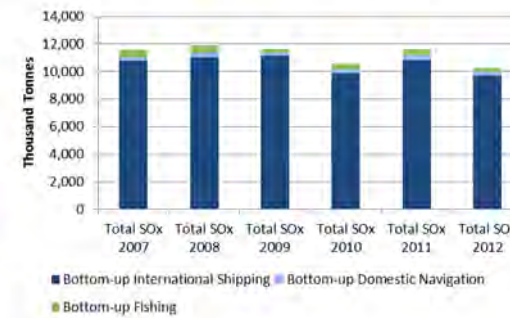


d. SO<sub>x</sub>

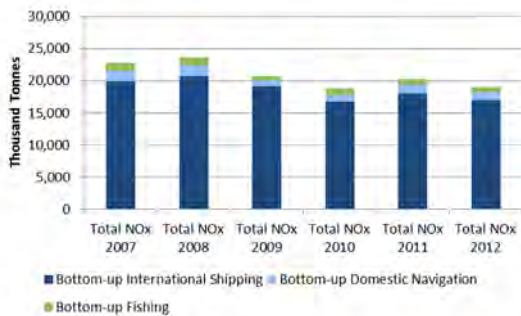


e. NO<sub>x</sub>

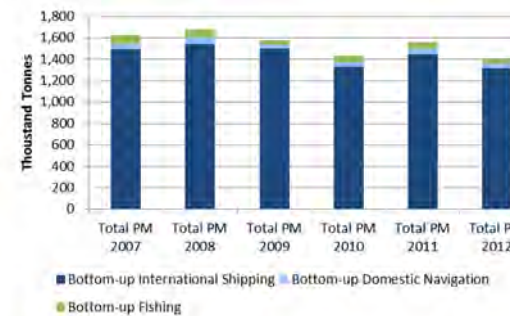

f. PM

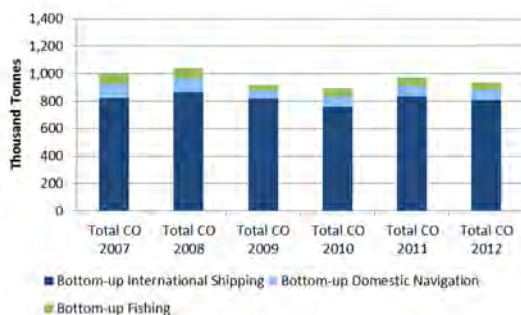

g. CO

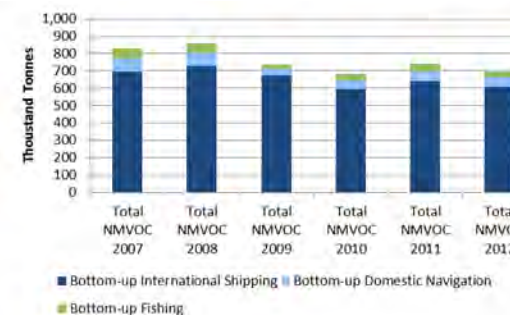

h. NMVOC

Figure 76 Time series of bottom-up results for a) CO<sub>2</sub>, b) CH<sub>4</sub>, c) N<sub>2</sub>O, d) SO<sub>x</sub>, e) NO<sub>x</sub>, f) PM, g) CO, and h) NMVOC, delineated by international shipping, domestic navigation and fishing.

## 2.5. Other relevant substances emissions inventory uncertainty analysis

The uncertainties involved with missing technical data for ships, incomplete geographical/temporal coverage of activity data and resistance/powering prediction are described in Section 1. Other sources of uncertainty include estimates of fuel consumption, allocation of fuel types consumed versus actual fuels consumed, auxiliary engine and boiler loads by mode, assignment of modes based on AIS data, IMO sulphur survey annual averages, and the factors used to estimate emissions. Uncertainty associated with these, with the exception of the emissions factors, is discussed in Section 1.5. The uncertainties associated with emissions factors include the vessels tested compared to the fleet modelled

and robustness of the number of ships tested in each sub-class. While some emissions factors have remained relatively in the same ranges since the IMO GHG Study 2009, there were several pollutants that had moderate to significant changes, as detailed in Section 2.4.1.

## 2.6. Other relevant substances emissions inventory comparison against IMO GHG Study 2009

Figure 75 presents the time series results for non-CO<sub>2</sub> relevant substances estimated in this study using bottom-up methods, with explicit comparison with the IMO GHG Study 2009 results. Section 1.6 shows that for ship types that could be directly compared, fuel consumption and CO<sub>2</sub> emissions totals estimated by the methods used in this study compare very well with methods used in the earlier study. As reported in Section 1.6, the additional precision in observing vessel activity patterns in the IMO GHG Study 2014 largely match general vessel activity assumptions in the 2009 study, at least for the inventory year 2007. (The updated methodology provides greatest value in the ability to observe year-on-year changes in shipping patterns, which the IMO GHG Study 2009 methods were less able to do.)

Given that the IMO GHG Study 2009 ‘concluded that activity-based estimates provide a more correct representation of the total emissions from shipping’, only bottom-up emissions for other relevant substances can be compared. The IMO GHG Study 2014 estimates of non-CO<sub>2</sub> GHGs and some air pollutant substances differ substantially from the IMO GHG Study 2009 results for the common year 2007. The IMO GHG Study 2014 produces higher estimates of CH<sub>4</sub> and N<sub>2</sub>O than the IMO GHG Study 2009, higher by 43% and 40%, respectively (approximate values). The IMO GHG Study 2014 estimates lower emissions of SO<sub>x</sub> (approximately 30% lower) and approximately 40% of the CO emissions estimated in the IMO GHG Study 2009. Estimates for NO<sub>x</sub>, PM and NMVOC in both studies are similar for 2007, within 10%, 11% and 3%, respectively (approximate values).

These underlying activity similarities essentially reduce the comparisons of other relevant substances estimated in the IMO GHG Study 2009 to a description of differences in EFs, as illustrated in Table 68. Differences in EFs essentially relate to static values in the 2009 study, which assumed an average MCR and EFs representative of the average engine’s actual duty cycle. The consortium made more detailed calculations in the IMO GHG Study 2014, which computes hourly fuel consumption and engine load factors and applies a load factor specific EF. In theory, if the average EFs across a duty cycle in the earlier study were computed for the same or similar activity, then the average EFs would mathematically represent the weighted average of the hourly load-dependent calculations. The crossplots presented in Section 1.6 provide evidence that the duty cycle assumptions in the IMO GHG Study 2009 were generally consistent with the more detailed analyses presented in this study.

Another source of differences may be related to fuel quality or engine parameter data representing a different understanding of the fleet technology. For example, the 2009 study assumed fuel sulphur was 2.7%, while the current study documents that the typical fuel sulphur content in 2007 was closer to 2.4%. Moreover, the IMO GHG Study 2014 updates these sulphur contents for later years.


Another example is natural gas fuelled engines, which are observed in the IMO GHG Study 2014 fleet but were not addressed in the 2009 study. This enables better characterisation of methane emissions (sometimes called methane slip), which has been significantly reduced through engine innovations. The IMO GHG Study 2009 characterised methane losses due to evaporation during transport of fuels as cargo (IMO GHG Study 2009, non-exhaust emissions, paragraph 3.47), and used a top-down methodology to evaluate methane emissions from engine exhaust (IMO GHG Study 2009, Tables 3-6 and 3-7). The 2009 study reported total methane emissions (combining exhaust and cargo transport estimates in Table 3-11), but did not determine any value for international shipping (IMO GHG Study 2009, Table 1-1). The 2009 study allocated significant discussion in sections describing potential reductions in GHGs to characterising natural gas methane emissions and identified efforts to achieve reductions in

methane emissions from marine engines. The IMO GHG Study 2014 explicitly applied current knowledge of methane slip in marine engines to those vessels fuelled by natural gas in our bottom-up inventories, thereby characterising CH<sub>4</sub> emissions better.


However, more detailed characterisation of fleet technology can result in different technology mixes. For example, the IMO GHG Study 2009 documented auxiliary boilers only for crude oil tankers, whereas the IMO GHG Study 2014 identified boiler technology on some bulk carriers, chemical tankers, container ships, general cargo ships, cruise ships, refrigerated bulk, Ro-Ro and vehicle carriers. The IMO GHG Study 2014 assigned engine-specific EFs at the individual ship level where possible, including differentiating between MSD and SSD engines, and residual versus distillate fuel types. These differences can help explain inventory differences between the two studies.

For CO<sub>2</sub>, NO<sub>x</sub> and PM, the IMO GHG Study 2014 values for year 2007 closely match the results reported in the IMO GHG Study 2009. The differences in these EFs are 1% for CO<sub>2</sub>, 3%–9% for NO<sub>x</sub> and 2%–13% for PM, respectively (approximate values). (The two values for NO<sub>x</sub> represent SSD and MSD; similarly, the two values for PM represent HFO and MDO typical values, respectively.) The match is best where vessel activity comparisons are similar, where observed fleet technology matches and where the emissions factors have not changed much. This again confirms that the general impact of the updated methodology is greater precision and ability to update year-on-year variation in technology or activity among individual vessels in the fleet. Major differences in emissions results for other relevant substances, therefore, can be explained by the different EFs used in the IMO GHG Study 2009 compared with the more detailed assignment of EFs in the IMO GHG Study 2014. This mainly relates to the emissions of CH<sub>4</sub>, N<sub>2</sub>O, CO, and NMVOC. These EF differences are 80%, 100%, 63% lower in the current study for CH<sub>4</sub>, N<sub>2</sub>O, and CO, respectively, and 30% higher for NMVOC (approximate values). These emissions represent combustion emissions of fuels and do not include evaporative losses from the transport of cargoes; the IMO GHG Study 2009 estimated the CH<sub>4</sub> losses from the transport of crude oil to be 140,000 tonnes. Table 1-1 of that study added direct emissions from engine combustion with the estimated losses of CH<sub>4</sub> from the transport of crude oil; no equivalent calculation is performed here.


Differences in sulphur (SO<sub>x</sub>) emissions are similarly attributed to different fuel-sulphur contents, using updated IMO sulphur reports. In this study, the bottom-up model allocation of fuel types for auxiliaries and some main engine technologies enables more detailed delineation of heavy residual and distillate fuel use; this accounts for most of the difference in sulphur emissions inventories between the studies. Moreover, the use of updated fuel sulphur contents can account for about 12% difference in the heavy residual fuel sulphur contents in 2007.

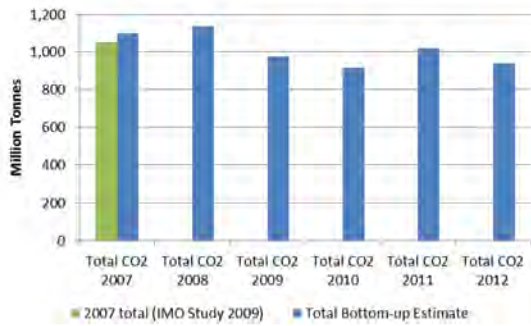


a. CO<sub>2</sub>

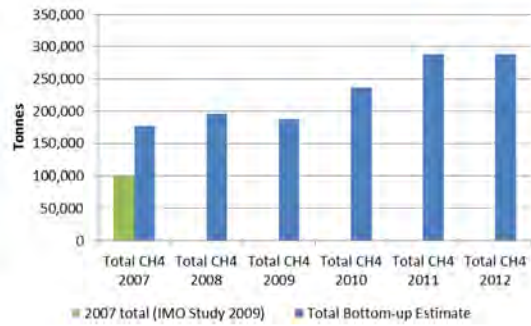


b. CH<sub>4</sub>

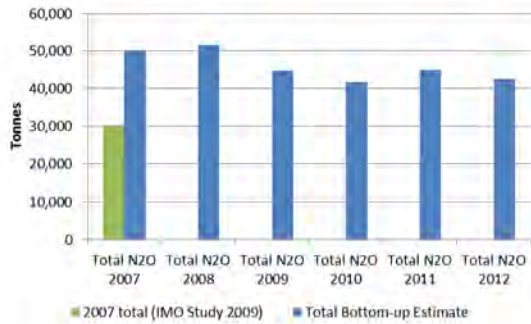


c. N<sub>2</sub>O

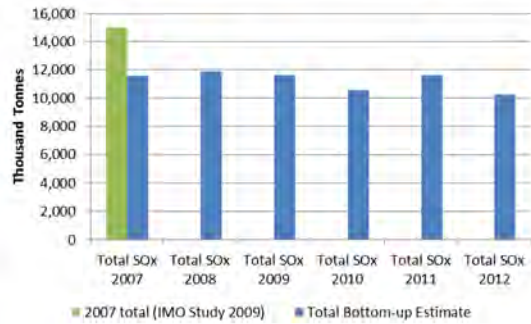


d. SO<sub>x</sub>

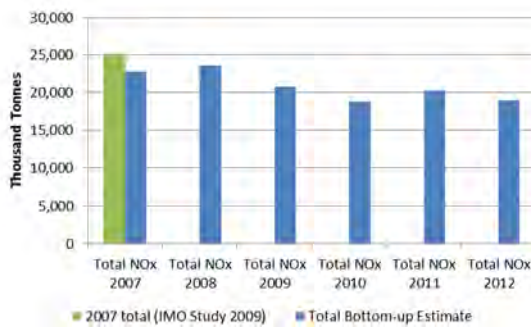


e. NO<sub>x</sub>

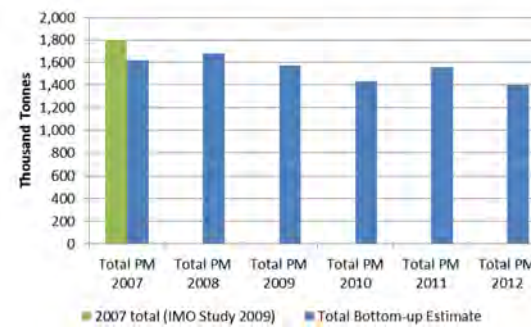

f. PM

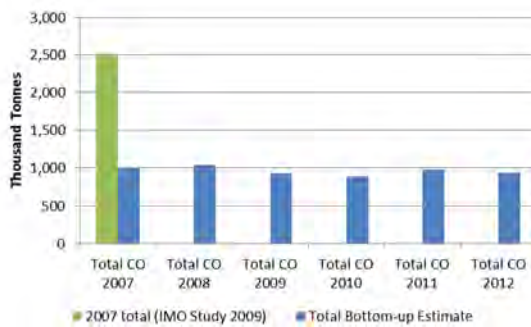

g. CO

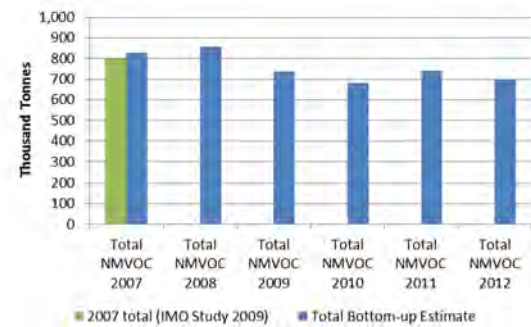

h. NMVOC

Figure 77 Time series of bottom-up results for a) CO<sub>2</sub>, b) CH<sub>4</sub>, c) N<sub>2</sub>O, d) SO<sub>x</sub>, e) NO<sub>x</sub>, f) PM, g) CO, and h) NMVOC. The green bar represents the IMO GHG Study 2009 estimate for comparison.

## 3. Scenarios for shipping emissions 2012–2050

### 3.1. Introduction

This chapter presents emissions scenarios for all six GHGs (CO<sub>2</sub>, CH<sub>4</sub>, N<sub>2</sub>O, HFCs, PFCs, SF<sub>6</sub>) and for other relevant substances as defined in this study (NO<sub>x</sub>, NMVOC, CO, PM, SO<sub>x</sub>).

Emissions scenarios present possible ways in which emissions could develop, building on plausible socio-economic, energy and policy scenarios. The emissions scenarios can inform policy makers, scientists and other stakeholders about the development of the environmental impacts of shipping, its drivers and the relevance of possible policy instruments to address emissions.

#### 3.1.1. Similarities and differences from IMO GHG Study 2009

The emission scenarios have been developed using a similar approach to that of the IMO GHG Study 2009, i.e. by modelling the most important drivers of maritime transport and efficiency trends in order to project energy demand in the sector. For most emissions, the energy demand is then multiplied by an emissions factor to arrive at an emissions projection. More detail about the methods and modelling can be found in Section 3.2.

Even though the approach is similar, the methods have been improved in important ways, taking into account advances in the literature and newly developed scenarios. Some of the most important improvements are highlighted below.

#### Socio-economic and energy scenarios

In the IMO GHG Study 2009, a range of transport and corresponding emissions projections to 2050 were presented. The underlying overall basis for these projections were the IPCC SRES scenarios (based upon the IPCC 2000 Special Report on Emissions Scenarios, which were widely in use at the time). There has been increased recognition across the climate scenario-modelling community that there is a need for an updated set of scenarios, but also recognition of the need to circumvent the time and expense associated with another IPCC-focused exercise. Thus, the relevant community itself developed the concept of representative concentration pathways (RCPs). Since these are now in use across the climate community, they have been adopted for this study (see Section 3.2.2). Outside the climate research community, other long-term scenarios exist (e.g. IEA 2013; OECD 2012; IMF 2014; RTI 2013).

Previously, shipping emissions scenarios were based more loosely on a consortium consensus approach, the so-called Delphi method. This study adopts a more disaggregated numerical approach with explicit improvements to the projection methodology by splitting the projections by ship type, using a non-linear regression model of a type widely adopted in the econometric literature (as opposed to simple linear models), and decoupling the transport of fossil fuels from GDP. In the previous report, there was no such discrimination by type, or consideration of future worlds where fossil-fuel energy demand is decoupled from GDP. More details are provided in Section 3.2.2 and Annex 7.

#### Business as usual and policy scenarios

The IMO GHG Study 2009 presented a multitude of scenarios but did not consider any of them to be BAUs. All scenarios presented in this study are combinations of trade scenarios, ship efficiency scenarios and emissions scenarios. The trade scenarios are based on combinations of RCPs and SSPs and, as discussed in detail in Section 3.2.2, all four are equally likely to occur. Their differences reflect either inherent uncertainties about the future (e.g. economic development, demographics and technological development), or uncertainties related to policy choices outside the remit of the IMO (e.g. climate, energy efficiency or trade policies). In many cases, these uncertainties are interrelated and cannot be disentangled.

The ship efficiency and emissions scenarios can be classified in two groups. Each of the scenarios has an option in which no policies are assumed beyond the policies that are currently in place, and one in which IMO continues to adopt policies to address air emissions or the energy efficiency of ships. The first type is labelled BAU, as it does not require policy interventions. In this way, each of the four trade scenarios has one BAU variant and three policy intervention variants. As both policy interventions result in lower GHG emissions, all policy intervention scenarios have emissions below the BAU scenario. These lower emission scenarios require additional policies beyond those that are currently adopted.

### **Marginal abatement cost curves**

This study employs marginal abatement cost curves (MACCs) containing 22 measures in 15 groups (measures within the same group are mutually exclusive), taking into account the fact that measures may be applicable to certain ship types only. The benefit of using MACCs over holistic efficiency improvement assumptions is that they allow for feedback between fuel prices and improvements in efficiency.

### **MARPOL ANNEX VI revisions (EEDI, SEEMP)**

After the publication of the IMO GHG Study 2009, MARPOL Annex VI parties have adopted a new chapter on energy efficiency for ships, mandating the EEDI for new ships, and the SEEMP for all ships. The impact of these regulations on the energy efficiency of ships is analysed and included in the model.

### **Ship types**

Since the IMO GHG Study 2009 there has been a remarkable increase in ship size, especially for container ships. The earlier study assumes that all container ships over 8000 TEU would have an average size of 100,000dwt but in 2011 the size of the average new-build ship has increased to 125,000dwt while ships of 165,000dwt have entered the fleet and larger ones are being studied. Larger ships are more efficient, i.e. they require less energy to move an amount of cargo over an amount of distance. In response, this study analyses the development of ship types in the last year and includes new categories for the largest ships.

#### **3.1.2. Outline**

The remainder of this chapter is organised as follows. Section 3.2 provides a brief description of the methods and data used to project emissions. It begins by presenting the emissions model, the factors taken into account in our projections and the long-term scenarios used as a basis for our projections. All the relevant factors of the projections are then discussed individually, showing which assumptions are made in each case and the basis on which they are made. Section 3.3 presents the projections of international maritime transport demand and associated emissions of CO<sub>2</sub> and of other relevant substances up to 2050.

## **3.2. Methods and data**

### **3.2.1. The emissions projection model**

The model used to project emissions starts with a projection of transport demand, building on long-term socio-economic scenarios developed for the IPCC (see Section 3.2.2). Taking into account developments in fleet productivity (see Section 3.2.4) and ship size (see Section 3.2.5), it projects the fleet composition in each year. Subsequently, it projects energy demand, taking into account regulatory and autonomous improvements in efficiency (see Section 3.2.6). Fuel consumption is calculated together with the fuel mix (see Section 3.2.7); this, combined with emissions factors (see Section 3.2.8), yields the emissions. Emissions are presented both in aggregate and per ship type and size category.

A schematic presentation of the emissions projection model is shown in Figure 76.

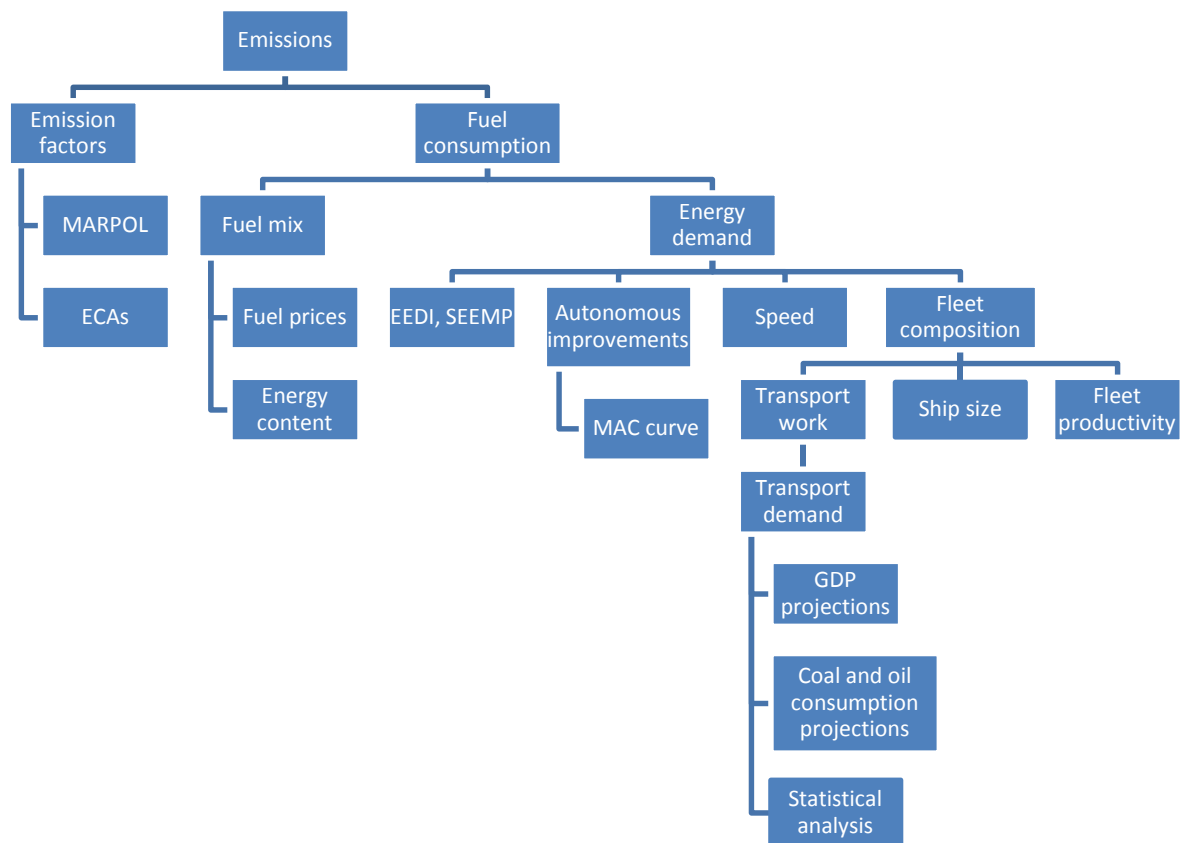


Figure 78 Schematic presentation of the emissions projection model.

### 3.2.2. Base scenarios

Scenario construction is necessary to gain a view of what may happen in the future. In the IMO GHG Study 2009, background scenarios (SRES – see Section 3.1.1) were chosen from the IPCC’s activities, since the 2009 study was primarily about emissions; it made sense to make the emissions scenarios consistent with other associated climate projections. Here, this study basically follows the same logic; while other ‘visions’ of the future are available, and arguably equally plausible, since the overall subject of the present study is emissions, this study follows the earlier precedent and uses approaches and assumptions that will ultimately allow the projections to be used in climate studies. Moreover, data from climate projections studies include the essential socio-economic and energy drivers that are essential for the emissions projections made here.

After its 4th Assessment Report, published in 2007, the IPCC decided to update the projections to be used in its next Assessment Report (IPCC 5th Assessment Report 2011/15). The scenarios are called representative concentration pathways (RCPs). Their naming and use are best explained in the quote below:

The name ‘representative concentration pathways’ was chosen to emphasise the rationale behind their use. RCPs are referred to as pathways in order to emphasise that their primary purpose is to provide time-dependent projections of atmospheric greenhouse gas (GHG) concentrations. In addition, the term pathway is meant to emphasise that it is not only a specific long-term concentration or radiative forcing outcome, such as a stabilisation level, that is of interest, but also the trajectory that is taken over time to reach that outcome. They are representative in that they are one of several different scenarios that have similar radiative forcing and emissions characteristics’ (IPCC Expert Meeting Report 2007).

A useful summary and guide to the origin and formulation of the RCP scenarios is provided by Wayne (2013). The ‘concentration’ refers to that of CO<sub>2</sub> and the ‘pathways’ are ‘representative’



of possible outcomes of energy, population, policy and other drivers that will ultimately determine the concentration of CO<sub>2</sub> in the atmosphere. There are four main RCPs in use, detailed in Table 69.

**Table 69 Descriptions and sources of representative concentration pathways.**

| RCP             | Description   | Source references                    | Model   |
|-----------------|---|--------------------------------------|---------|
| RCP2.6 (or 3PD) | Peak in radiative forcing at ~3 W/m <sup>2</sup> before 2100 and decline                    | Van Vuuren et al. 2006, 2007         | IMAGE   |
| RCP4.5          | Stabilisation without overshoot pathway to 4.5 W/m <sup>2</sup> at stabilisation after 2100 | Clarke et al. 2007; Wise et al. 2009 | GCAM    |
| RCP6.0          | Stabilisation without overshoot pathway to 6 W/m <sup>2</sup> at stabilisation after 2100   | Hijoka et al. 2008                   | AIM     |
| RCP8.5          | Rising radiative forcing pathway leading to 8.5 W/m <sup>2</sup> in 2100.                   | Riahi et al. 2007                    | MESSAGE |

The numbers associated with the RCPs (2.6–8.5) simply refer to resultant radiative forcing in W/m<sup>2</sup> by 2100. Further technical details of the RCPs are given in Moss et al. (2010). The RCPs cover a range of ultimate temperature projections by 2100 (i.e. global mean surface temperature increases over the pre-industrial period from GHGs), from around 4.9°C (RCP8.5) to 1.5°C in the most optimistic scenario (RCP2.6 or RCP3PD, where PD refers to peak and decline).

These RCPs are used to project shipping coal and liquid fossil fuel transport work, on the basis of a historical correlation with global coal and oil consumption (see Section 3.2.3), using the IAM energy demand projections of different fuel/energy types (EJ/yr). A set of GDP projections from the associated five SSP scenarios (see Kriegler et al. 2012) was used for non-fossil fuel transport projections (see Section 3.2.3).

The five SSPs each have different narratives (Ebi et al. 2013) and are summarised in Table 70.

**Table 70 Short narratives of shared socio-economic pathways.**

| SSP number and name      | Short narrative  |
|--------------------------|--|
| SSP1: Sustainability     | A world making relatively good progress towards sustainability, with ongoing efforts to achieve development goals while reducing resource intensity and fossil fuel dependency. It is an environmentally aware world with rapid technology development and strong economic growth, even in low-income countries. |
| SSP2: Middle of the road | A world that sees the trends typical of recent decades continuing, with some progress towards achieving development goals. Dependency on fossil fuels is slowly decreasing. Development of low-income countries proceeds unevenly.   |

|                                |   |
|--------------------------------|---|
| SSP3: Fragmentation            | A world that is separated into regions characterised by extreme poverty, pockets of moderate wealth and a large number of countries struggling to maintain living standards for a rapidly growing population.   |
| SSP4: Inequality               | A highly unequal world in which a relatively small, rich, global elite is responsible for most GHG emissions, while a larger, poor group that is vulnerable to the impact of climate changes contributes little to the harmful emissions. Mitigation efforts are low and adaptation is difficult due to ineffective institutions and the low income of the large poor population. |
| SSP5: Conventional development | A world in which development is oriented towards economic growth as the solution to social and economic problems. Rapid conventional development leads to an energy system dominated by fossil fuels, resulting in high GHG emissions and challenges to mitigation.   |

This presented the problem of how to combine the RCPs with the SSPs and guidance was taken from Kriegler et al. (2012), as follows.

In principle, several SSPs can result in the same RCP, so in theory many BAU scenarios can be developed. However, in order to limit the number of scenarios, while still showing the variety in possible outcomes, it was decided to combine each SSP with one RCP, under the constraint that this combination is feasible. The SSPs are thus aligned with the RCPs on the basis of their baseline warming. Increased mitigation effort would potentially result in less fossil fuel transport, probably somewhat lower economic growth until 2050 and therefore probably lower transport demand and maritime emissions.

This procedure has resulted in the following scenarios:

- RCP 8.5 combined with SSP5;
- RCP 6 combined with SSP1;
- RCP 4.5 combined with SSP3;
- RCP 2.6 combined with SSP4/2.

In all the IPCC's work on future scenarios of climate and its impacts, it has never assumed a BAU underlying growth scenario. The IPCC has always argued that it does not produce any one emissions scenario that is more likely than another, ergo no overall BAU scenario exists. This is therefore reflected in this study and no one basic RCP/SSP scenario that underlies the shipping emissions scenarios can be considered more likely than another; they are all BAU scenarios.

### 3.2.3. Transport demand projections

Transport work data (in billion tonne miles per year) were kindly provided for the years 1970–2012 by UNCTAD (see Annex 7). The categories considered were crude oil and oil products (combined), coal bulk dry cargo, non-coal bulk dry cargo (iron ore, coal, grain, bauxite and alumina and phosphate, all combined) and other dry cargo (essentially considered as container and other similar purpose shipping). The data were for international shipping only. Transport work (i.e. tonne miles) as opposed to the absolute amount transported (tonnes), is considered to be a better variable to predict transport demand and emissions. However, this assumes that average hauls remain constant: this, is in fact borne out by the data and the two variables correlate significantly with an  $R^2$  value of  $> 0.95$ .

Cargo types were treated separately, as it is evident from the data that they are growing at different rates and subject to different market demands.

Thus, as a refinement to the approach taken in the IMO GHG Study 2009, the current study has developed the methodology of CE Delft, (2012), which considered different ship types and has gone a step further by decoupling the transport of fossil fuel (oil and coal products) from GDP, as in the RCP/SSP scenarios in which fossil fuel use is decoupled from economic development.

In order to predict ship transport work (by type, or total), the general principle is to look for a predictor variable that has a meaningful physical relationship with it. In previous scenario studies, global GDP has been used as a predictor for total ship transport work, in that it has a significant positive statistical correlation, and is also meaningful in the sense that an increase in global GDP is likely to result in an increase in global trade and therefore ship transport of goods.

If an independent assessment of the predictor variable (e.g. GDP) is available for future years, this allows prediction of ship transport work. It assumes that such a physical relationship is robust for the future as it has been for the past. Previously, a linear assumption has been made, i.e. a linear regression model has been used between the ratio of historical transport work to historical GDP against time. In this study, this assumption has been improved by the use of a non-linear model, commonly used in economics, that assumes classical emergence, growth and maturation phases.

However, the assumption of a historical relationship between coal and oil transport by shipping and GDP inherently means that GDP growth and fossil-fuel use will remain tightly coupled in the future, i.e. that with increased economic growth, it is not possible to limit fossil fuel use. This clearly does not reflect certain desired policy and environmental outcomes, where a decrease in fossil-fuel dependence and an increase in GDP can be achieved.

In order to overcome this, this study has investigated the relationship between historical ship transported coal and oil and historical global coal and oil consumption. This relationship has been found to be as robust as that as between historical coal and oil transport work and historical GDP ( $r^2 > 0.9$ ) and is arguably a better physical relationship than between fossil fuel transported by shipping and GDP. The RCP scenarios have provided projections of fossil fuel consumption, split between coal and oil. This conveniently allows us to use these predictor variables to determine potential future ship transport of coal and oil but decoupled from GDP. Other ship transported goods and products remain predicted by independent future GDP assessments provided by the RCPs.

In all cases of ship-transported products, the non-linear Verhulst regression model (with S-shaped curve) is used to reflect more realistic market behaviour rather than continued linear relationships. The historical data on transport work (by type) and demand and GDP are shown in Figure 79.

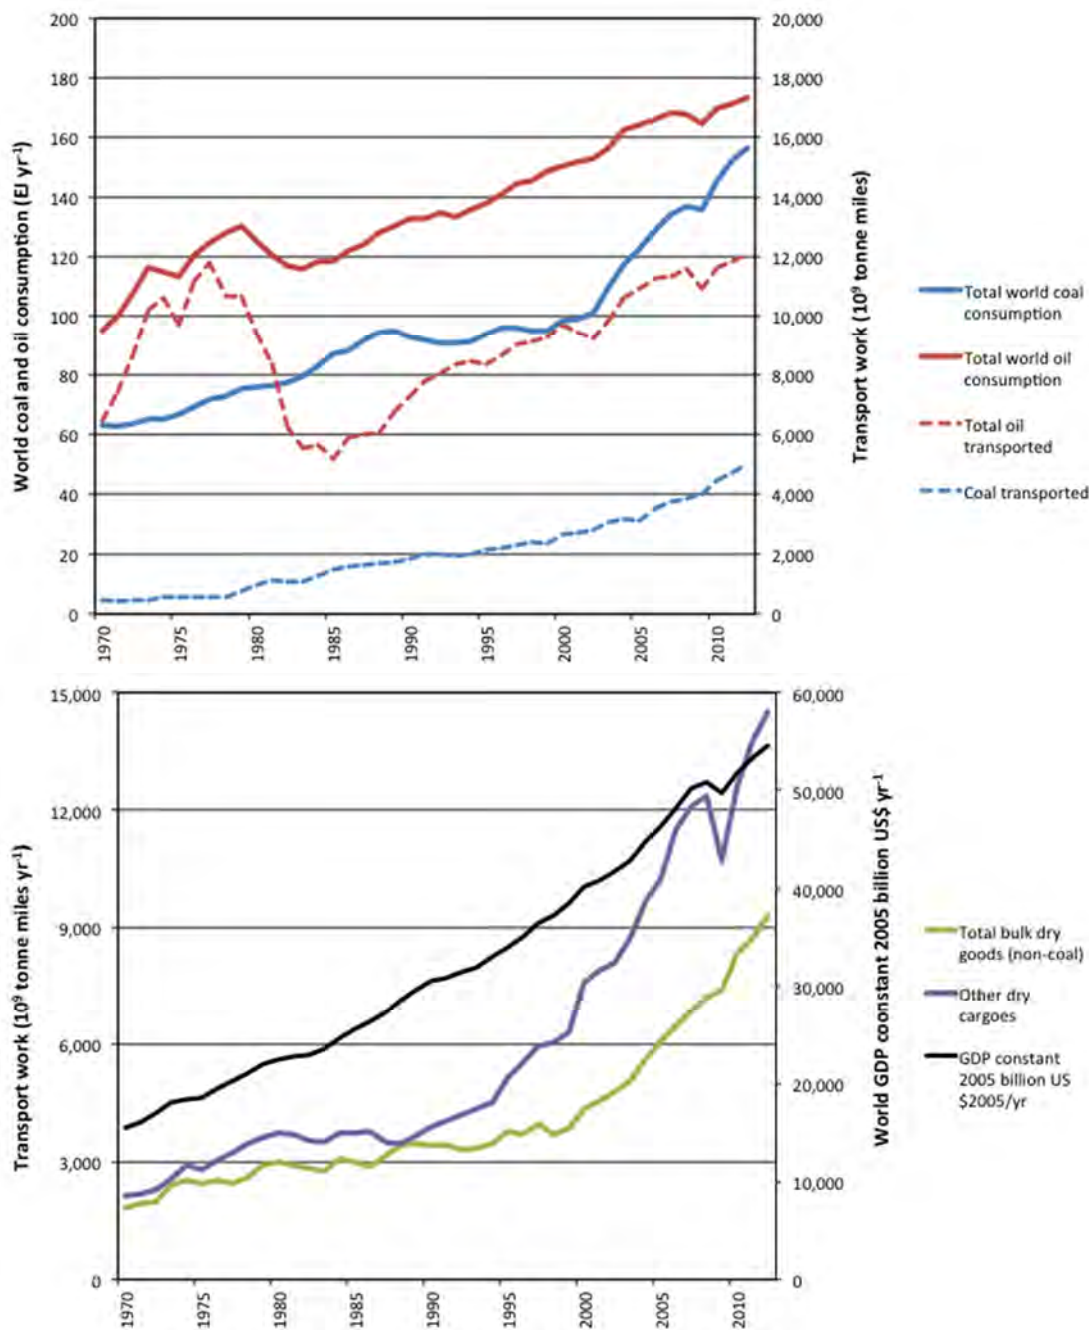


Figure 79 Historical data on world coal and oil consumption, coal and oil transported (upper panel), total (non-coal) bulk dry goods, other dry cargoes and global GDP (lower panel).

Predicted proxy data of (separate) coal and oil demand and GDP were provided by the RCP/SSP scenarios and the associated underlying integrated assessment models (IAMs). In one case (RCP6.0) fossil energy demand data could not be obtained and data from the IAM GCAM were used.

### 3.2.4. Fleet productivity

For the emissions projection, the development of the tonnage of the different ship types is determined by a projection of the ships' productivity, defined as transport work per deadweight tonne. More precisely, the fleet is assumed to grow if, given the projected productivity, the expected transport demand cannot be met by the fleet. On the other hand, if, given the projected productivity, the expected transport demand could be met by a smaller fleet, the active fleet is not assumed to decrease. This means that ships are assumed to reduce their

cargo load factor, i.e. become less productive, rather than being scrapped or laid up or reducing their speed.

The projection of ship productivity is based on the historical productivity of the ship types. For all ship types, the 2012 productivity of the ship types is lower than the long-term historical average (see Annex 7 for more details). This is assumed to be caused by the business cycle, rather than by structural changes in the shipping market; therefore, this study applies a future productivity development that converges towards the ship type's average productivity, reverting back to the 25-year<sup>4</sup> mean value within 10 years, i.e. until 2022.

The ship productivity indices used in the emissions projection model, which can be specified per five-year period, are given in Table 71.

**Table 71 Ship type productivity indices used in emissions projection model.**

|                        | 2012 | 2017 | 2022–2050 |
|------------------------|------|------|-----------|
| Liquid bulk vessels    | 100  | 113  | 125       |
| Dry bulk vessels       | 100  | 102  | 104       |
| Container ships        | 100  | 109  | 118       |
| General cargo vessels  | 100  | 109  | 118       |
| Liquefied gas carriers | 100  | 106  | 113       |
| All other vessels      | 100  | 100  | 100       |

### **3.2.5. Ship size development**

In the emissions projection model, ship types are divided into the same ship size categories as in the emissions inventory model. For the emissions projection, the future number of ships per size category has to be determined.

The distribution of the ships over their size categories can be expected to change over time according to the number of the ships that are scrapped and enter the fleet, as well as their respective size.

In the emissions projection model it is assumed that total capacity per ship type meets projected transport demand, that all ships have a uniform lifetime of 25 years and that the average size of the ships per size category will not change compared to the base year 2012, while the number of ships per bin size will.

The development of the distribution of the vessels over the size categories until 2050 is determined based on a literature review, taking into account historical developments in distribution, expected structural changes in the markets and infrastructural constraints. In Table 72 and Table 73, 2012 distributions and expected distributions for 2050 are presented.

---

<sup>4</sup> Due to a lack of historical data, for container vessels and liquefied gas vessels we take the average of the 1999–2012 period, i.e. a 13-year period.

**Table 72 2012 distribution and expected distribution 2050 of container and LG carriers over bin sizes.**

| Ship type              | Bin size                      | Distribution in terms of numbers |      |
|------------------------|-------------------------------|----------------------------------|------|
|                        |                               | 2012                             | 2050 |
| Container vessels      | 0–999                         | 22%                              | 22%  |
|                        | 1,000–1,999 TEU               | 25%                              | 20%  |
|                        | 2,000–2,999 TEU               | 14%                              | 18%  |
|                        | 3,000–4,999 TEU               | 19%                              | 5%   |
|                        | 5,000–7,999 TEU               | 11%                              | 11%  |
|                        | 8,000–11,999 TEU              | 7%                               | 10%  |
|                        | 12,000–14,500 TEU             | 2%                               | 9%   |
|                        | 14,500 TEU +                  | 0.2%                             | 5%   |
| Liquefied gas carriers | 0–49,000 m <sup>3</sup>       | 68%                              | 32%  |
|                        | 50,000–199,999 m <sup>3</sup> | 29%                              | 66%  |
|                        | > 200,000 m <sup>3</sup>      | 3%                               | 2%   |

**Table 73 2012 distribution and expected distribution 2050 of oil/chemical tankers and dry bulk carriers over bin sizes.**

| Ship type            | Size bins (dwt) | Distribution in terms of numbers |      |
|----------------------|-----------------|----------------------------------|------|
|                      |                 | 2012                             | 2050 |
| Oil/chemical tankers | 0–4,999         | 1%                               | 1%   |
|                      | 5,000–9,999     | 1%                               | 1%   |
|                      | 10,000–19,999   | 1%                               | 1%   |
|                      | 20,000–59,999   | 7%                               | 7%   |
|                      | 60,000–79,999   | 7%                               | 7%   |
|                      | 80,000–119,999  | 23%                              | 23%  |
|                      | 120,000–199,999 | 17%                              | 17%  |
|                      | 200,000+        | 43%                              | 43%  |
| Dry bulk carriers    | 0–9,999         | 1%                               | 1%   |
|                      | 10,000–34,999   | 9%                               | 6%   |
|                      | 35,000–59,999   | 22%                              | 20%  |
|                      | 60,000–99,999   | 26%                              | 23%  |
|                      | 100,000–199,999 | 31%                              | 40%  |
|                      | 200,000-+       | 11%                              | 10%  |

For the other ship types the 2012 size distribution is presumed not to change until 2050.

### **3.2.6. EEDI, SEEMP and autonomous improvements in efficiency**

The projection of the future emissions of maritime shipping requires projecting future developments in the fleet's fuel efficiency. In the period up to 2030, this study distinguishes between market-driven efficiency changes and changes required by regulation, i.e. EEDI and SEEMP. Market-driven efficiency changes are modelled using a MACC, assuming that a certain share of the cost-effective abatement options are implemented. In addition, regulatory requirements may result in the implementation of abatement options irrespective of their cost-effectiveness. Between 2030 and 2050, there is little merit in using MACCs, as the uncertainty about the costs of technology and its abatement potential increases rapidly for untested technologies. In addition, regulatory improvements in efficiency for the post-2030 period have been discussed but not defined. Therefore this study takes a holistic approach towards ship efficiency after 2030.

Our MACC is based on data collected for IMarEST and submitted to the IMO in MEPC 62/INF.7. The cost curve uses data on the investment and operational costs and fuel savings of 22 measures to improve the energy efficiency of ships, grouped into 15 groups (measures

within one group are mutually exclusive and cannot be implemented simultaneously on a ship). The MACC takes into account that some measures can only be implemented on specific ship types. It is also assumed that not all cost-effective measures are implemented immediately but that there is a gradual increase in the uptake of cost-effective measures over time.

The EEDI will result in more efficient ship designs and consequently in ships that have better operational efficiency. In estimating the impact of the EEDI on operational efficiency, This study takes two counteracting factors into account. First, the current normal distribution of efficiency (i.e. there are as many ships below as above the average efficiency, and the larger the deviation from the mean, the fewer ships there are) is assumed to change to a skewed distribution (i.e. most ships have efficiencies at or just below the limit, and the average efficiency will be a little below the limit value). As a result, the average efficiency improvement will exceed the imposed stringency limit. Second, the fact that most new-build ships install engines with a better specific fuel consumption than has been assumed in defining the EEDI reference lines is also taken into account. The result of these two factors is that operational improvements in efficiency of new ships will exceed the EEDI requirements in the first three phases but will lag behind in the third (see Annex 7 for a more detailed explanation).

It is likely that improvements in efficiency will continue after 2030, although it is impossible to predict what share of the improvements will be market-driven and what regulation-driven. Because of the high uncertainty of technological development over such a timescale, two scenarios are adopted. One coincides with the highest estimates in the literature, excluding speed and alternative fuels, which are accounted for elsewhere: a 60% improvement over current efficiency levels. The second has more conservative estimates, i.e. a 40% improvement over current levels.

### 3.2.7. Fuel mix: market and regulation driven changes

Two main factors will determine the future bunker fuel mix of international shipping:

1. the relative costs of using the alternative fuels;
2. the relative costs of the sector's alternative options for compliance with environmental regulation.

The environmental regulations that can be expected to have the greatest impact on the future bunker fuel mix are the SO<sub>x</sub> and NO<sub>x</sub> limits set by the IMO (Regulation 13 and 14 of Marpol Annex VI), which will become more stringent in the future. This will also apply in any additional ECAs that may be established in the future.

In the emission projection model two fuel mix scenarios are considered, a low LNG-constant ECA case and a high LNG-extra ECA case.

In the low LNG-constant ECA case, the share of fuel used in ECAs will remain constant. In this case, it is assumed that half of the fuel currently used in ECAs is used in ECAs that control only SO<sub>2</sub>, and the other half in ECAs where both SO<sub>2</sub> and NO<sub>x</sub> emissions are controlled. In this scenario, NO<sub>x</sub> controls are introduced in half of the ECAs from 2016 and in the other half from 2025. In this case, demand for LNG is limited.

The high LNG-extra ECA case assumes that new ECAs will be established in 2030, doubling the share of fuel used in ECAs. In this case, there is a strong incentive to use LNG to comply with ECAs. In Table 74, the fuel mix is given per scenario.

**Table 74 Fuel mix scenarios used for emissions projection (mass %).**

|                          |           |                        |     |
|--------------------------|-----------|------------------------|-----|
| High LNG-extra ECAs case | LNG share | Distillates and LSHFO* | HFO |
|--------------------------|-----------|------------------------|-----|

|      |     |     |     |
|------|-----|-----|-----|
| 2012 | 0%  | 15% | 85% |
| 2020 | 10% | 30% | 60% |
| 2030 | 15% | 35% | 50% |
| 2050 | 25% | 35% | 40% |

| Low LNG-constant ECAs case | LNG share | Distillates and LSHFO* | HFO |
|----------------------------|-----------|------------------------|-----|
| 2012                       | 0%        | 15%                    | 85% |
| 2020                       | 2%        | 25%                    | 73% |
| 2030                       | 4%        | 25%                    | 71% |
| 2050                       | 8%        | 25%                    | 67% |

\*Sulphur content of 1% in 2012 and 0.5% from 2020.

Both scenarios assume that the global 0.5% sulphur requirement will become effective in 2020. A later enforcement (2025) is accounted for in a sensitivity analysis.

### 3.2.8. Emissions factors

The emissions factors for NO<sub>x</sub> and SO<sub>2</sub> will change as a result of MARPOL Annex VI regulations, and the HFC emissions factors will change due to the R-22 phase-out. The impact of these regulations on the emissions factors is described below.

NO<sub>x</sub> emissions factors decline over time as Tier 1 engines replace Tier 0 engines and later Tier 2 engines replace Tier 0 and Tier 1 engines. Scenarios in which LNG, which has low NO<sub>x</sub> emissions, is given preference in ECAs are modelled. When the share of fuel used in ECAs exceeds the share of LNG in the fuel mix, exhaust gas treatment or engine modifications are used to meet Tier 3 NO<sub>x</sub> regulation in ECAs, thus lowering the average emission factor per unit of fuel. The resulting emissions factors are shown in Table 75. If LNG is used to a higher degree outside ECAs, emissions factors and total NO<sub>x</sub> emissions will be lower, as more ships using HFO or MGO will use other means to meet Tier 3 emissions levels.

Table 75 NO<sub>x</sub> emissions factors in 2012, 2030 and 2050 (g/g fuel).

| Scenario                                    | Fuel type | Year  |                     |       |
|---|-----------|-------|---------------------|-------|
|   |           | 2012  | 2030                | 2050  |
| Global average, low ECA, low LNG scenario   | HFO       | 0.090 | 0.083 <sup>55</sup> | 0.076 |
|   | MGO       | 0.096 | 0.088               | 0.081 |
|   | LNG       | 0.014 | 0.014               | 0.014 |
| Global average, high ECA, high LNG scenario | HFO       | 0.090 | 0.083               | 0.069 |
|   | MGO       | 0.096 | 0.089               | 0.073 |
|   | LNG       | 0.014 | 0.014               | 0.014 |

For the SO<sub>x</sub> emissions factors, it is assumed that LNG and MGO will be used to meet the ECA fuel requirements and scrubbers will be used to reduce the effective emissions factors of fuels used outside ECAs to 0.5% from 2020 onwards.

Emissions from HFC result from leaks from cooling systems and air conditioners. They do not emerge from fuel combustion but are assumed to be driven by the number of ships. There are several HFCs with different GWP. The most relevant are presented in Table 76.

<sup>55</sup> The lower emission factor for NO<sub>x</sub> in the low LNG scenario in 2030 is the result of the fact that this scenario requires more ships to use an SCR or EGR to meet tier 3 instead of switching to LNG.



Table 76 HFCs used on board ships.

| Substance | GWP  | Notes  |
|-----------|------|--|
| R-22      | 1810 | R-22 (chlorodifluoromethane) has been the dominant refrigerant in air conditioners used on board ships. The production of R-22 has been phased out under the Montreal Protocol in many countries. It is assumed that it is only used in the fleet built before 2000. |
| R-134a    | 1300 | R134a (1,1,1,2-Tetrafluoroethane) is used as a replacement for R-22 in vessels built from 2000 onwards.  |
| R-404a    | 3700 | R404a is a mixture of R125,R143a and R134a. It is used predominantly in fishing vessels but also in freezing and cooling equipment in other vessels.   |

Assuming that ships built before 2000 have a 25-year lifetime, R-22 will have become obsolete in shipping by 2025. The study does not model that other HFCs will be phased out, that air conditioner leakage rates will change or that other coolants will replace HFCs.

The emissions factors of other relevant substances are assumed to remain constant over time.

### 3.3. Results

#### 3.3.1. Transport demand

The projections of GDP are shown in Figure 80, where SSP5 (associated in this study with RCP8.5) results in a world GDP that is approximately seven times greater than present-day values by 2050 (at constant 2005 US\$); SSP3 (the lowest) projects GDP to triple in the same period.

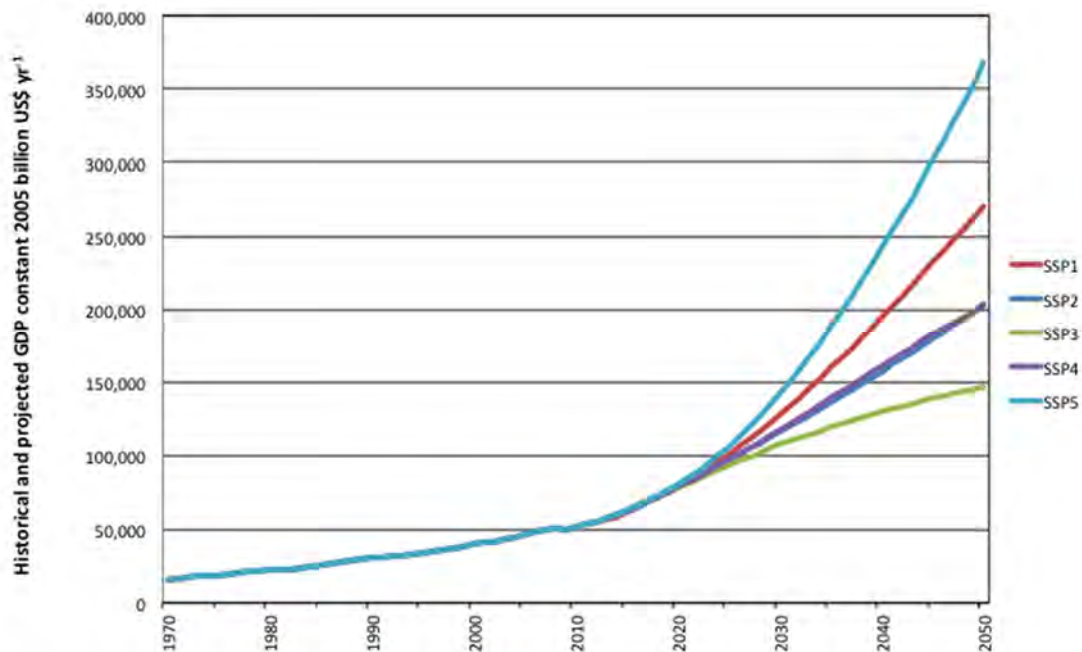


Figure 80 Historical data to 2012 on global GDP (constant 2005 US\$ billion/yr) coupled with projections of GDP from SSP1 through to SSP5 by 2050.

Historical and projected data on consumption of coal and oil were taken from Statistical Review of World Energy 2014 (BP 2014) and RCPs (see Figure 81).

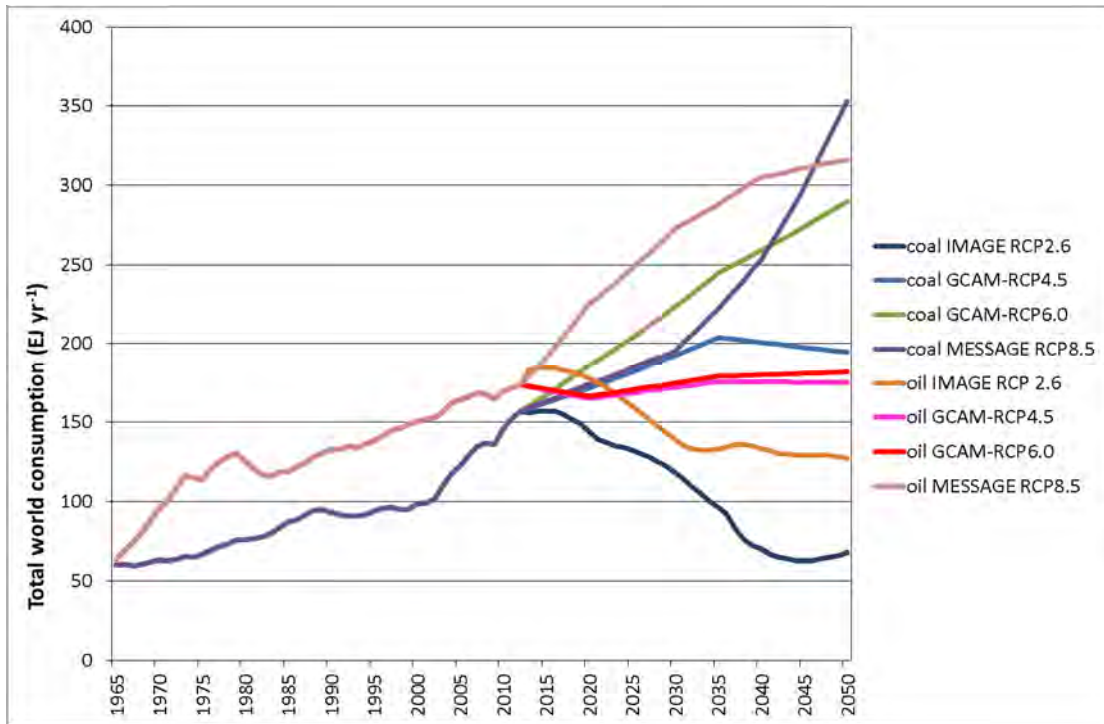


Figure 81 Historical data to 2012 on global consumption of coals and oil (EJ/yr) coupled with projections from RCP2.6 through to RCP8.5 by 2050.

The GDP projections were used to project shipping transport work for non-coal combined bulk ship traffic and other dry cargo ship traffic demand, resulting in the ranges of transport shown in Figure 82.

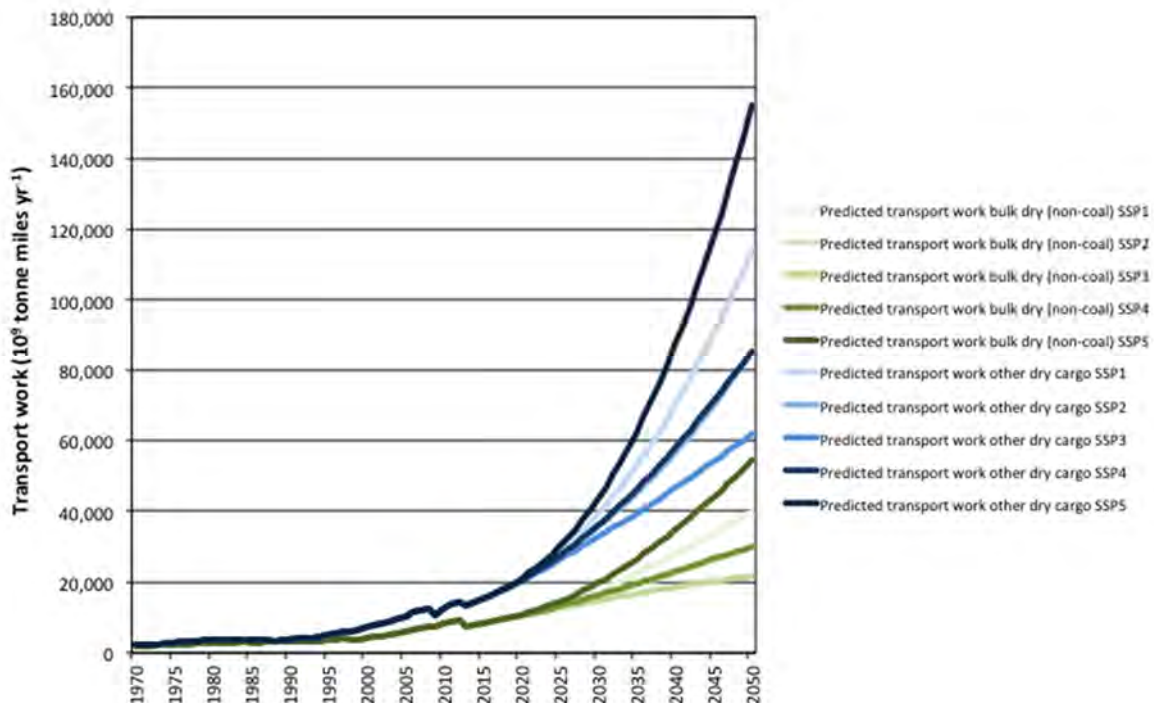


Figure 82 Historical data to 2012 on global transport work for non-coal combined bulk dry cargoes and other dry cargoes (billion tonne-miles) coupled with projections driven by GDPs from SSP1 through to SSP5 by 2050.

Lastly, the decoupling of future use of fossil fuel from GDP is illustrated by the decline in the use of coal and oil in some scenarios, shown in Figure 83. This is in line with the storylines of the lower RCP scenarios (e.g. RCP2.6/3PD and RCP 4.5).

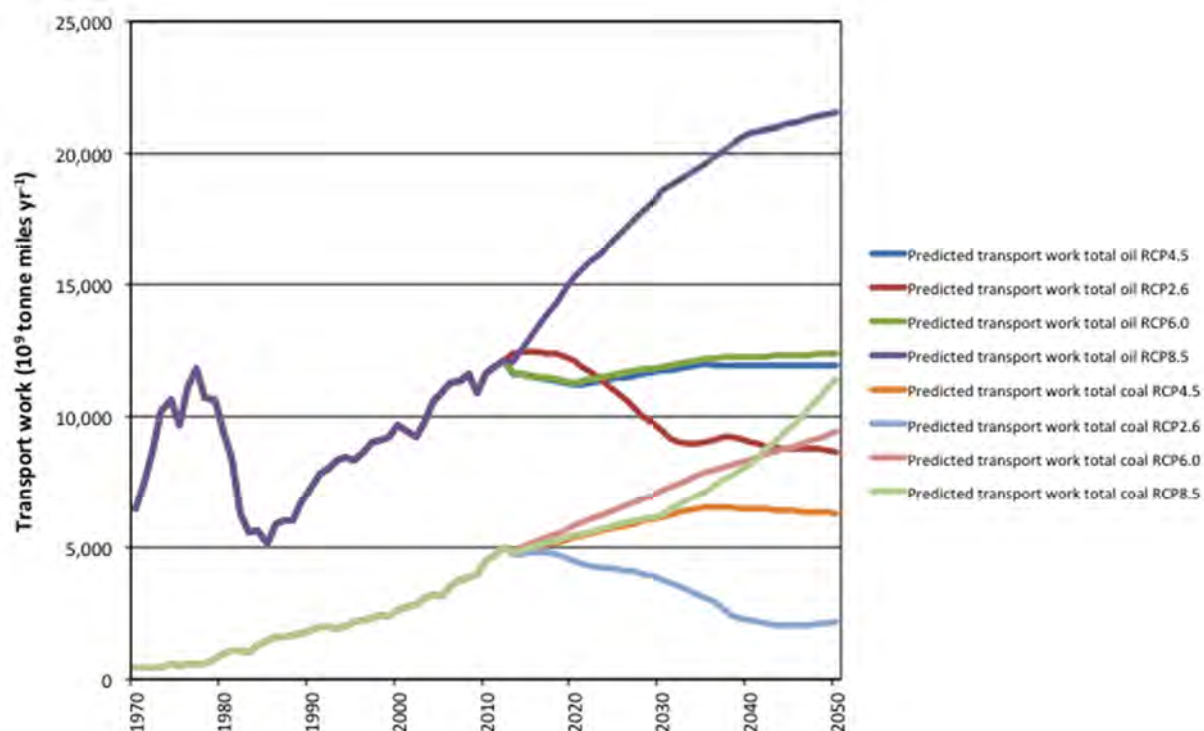


Figure 83 Historical data to 2012 on global transport work for ship-transported coal and liquid fossil fuels (billion tonne-miles) coupled with projections of coal and energy demand driven by RCPs2.6, 4.5, 6.0 and 8.5 by 2050.

### 3.3.2. Projected CO<sub>2</sub> emissions

Using the model and input described above, this study has projected CO<sub>2</sub> emissions for 16 scenarios:

- four RCP/SSP based scenarios of transport demand, disaggregated into cargo groups;
- for each of these four scenarios, one ECA/fuel mix scenario that keeps the share share of fuel used in ECAs constant over time and has a slow penetration of LNG in the fuel mix, and one that projects a doubling of the amount of fuel used in ECAs and has a higher share of LNG in the fuel mix;
- for each of the eight combinations of demand and ECA scenarios, two efficiency trajectories, one assuming an ongoing effort to increase the fuel-efficiency of new and existing ships after 2030, resulting in a 60% improvement over the 2012 fleet average by 2050, and the other assuming a 40% improvement by 2050.

The scenarios and their designations are summarised in Table 77.

Table 77 Overview of assumptions per scenario.

| Scenario | RCP scenario | SSP scenario | Fuel mix (LNG, ECA) | Efficiency improvement 2050 |
|----------|--------------|--------------|---------------------|-----------------------------|
| 1        | RCP8.5       | SSP5         | high LNG/extra ECA  | High                        |
| 2        | RCP6.0       | SSP1         | high LNG/extra ECA  | High                        |
| 3        | RCP4.5       | SSP3         | high LNG/extra ECA  | High                        |
| 4        | RCP2.6       | SSP4         | high LNG/extra ECA  | High                        |
| 5        | RCP8.5       | SSP5         | high LNG/extra ECA  | Low                         |
| 6        | RCP6.0       | SSP1         | high LNG/extra ECA  | Low                         |
| 7        | RCP4.5       | SSP3         | high LNG/extra ECA  | Low                         |
| 8        | RCP2.6       | SSP4         | high LNG/extra ECA  | Low                         |
| 9        | RCP8.5       | SSP5         | low LNG/no ECA      | High                        |
| 10       | RCP6.0       | SSP1         | low LNG/no ECA      | High                        |
| 11       | RCP4.5       | SSP3         | low LNG/no ECA      | High                        |
| 12       | RCP2.6       | SSP4         | low LNG/no ECA      | High                        |
| 13 (BAU) | RCP8.5       | SSP5         | low LNG/no ECA      | Low                         |
| 14 (BAU) | RCP6.0       | SSP1         | low LNG/no ECA      | Low                         |
| 15 (BAU) | RCP4.5       | SSP3         | low LNG/no ECA      | Low                         |
| 16 (BAU) | RCP2.6       | SSP4         | low LNG/no ECA      | Low                         |

The resulting projections of CO<sub>2</sub> emissions are presented graphically in Figure 84 and in tabular form in Table 78. The average emissions growth across all scenarios in 2020 amounts to 7% of 2012 emissions. For 2030, the average emissions increase is 29% and for 2050 95%. Some scenarios have higher growth, such as high economic growth (SSP5) and high fossil fuel consumption (RCP 8.5) scenarios, while the scenarios with low economic growth (SSP3) and moderate fossil fuel use (RCP 4.5) have the lowest emissions growth. All BAU scenarios show an increase in emissions, ranging from 50% to 250% in 2050.

Scenarios with high improvements in efficiency after 2030 (1–4 and 9–12) exhibit either decelerating emissions growth after 2035 or 2040 or a downward trend after those years, when combined with moderate economic growth and decreasing fossil fuel use. Figure 84 shows that in many cases the lines representing high-efficiency scenarios cross the lines of low-efficiency but higher growth scenarios. This suggests that, to some extent, more ambitious improvements in efficiency can offset higher transport demand.

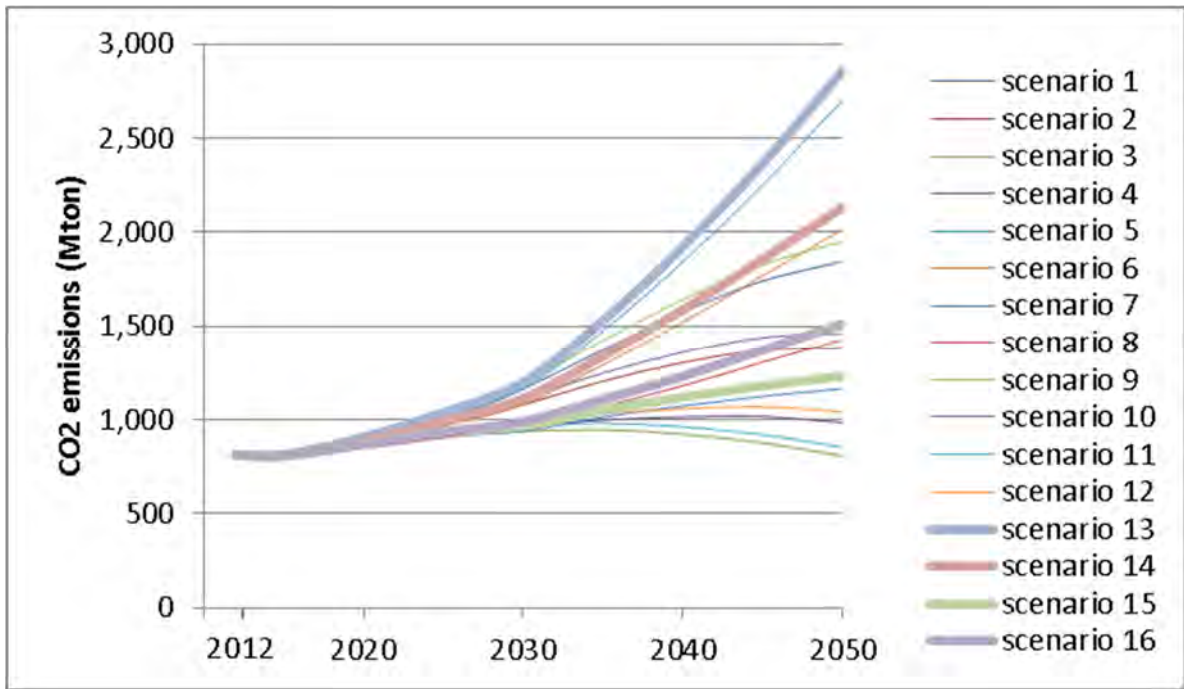


Figure 84 CO<sub>2</sub> emission projections.

Table 78 CO<sub>2</sub> emission projections.

| Scenario          | base year | 2015 | 2020 | 2025  | 2030  | 2035  | 2040  | 2045  | 2050  |
|-------------------|-----------|------|------|-------|-------|-------|-------|-------|-------|
| scenario 1        | 810       | 800  | 890  | 1.000 | 1.200 | 1.400 | 1.600 | 1.700 | 1.800 |
| scenario 2        | 810       | 800  | 870  | 970   | 1.100 | 1.200 | 1.300 | 1.300 | 1.400 |
| scenario 3        | 810       | 800  | 850  | 910   | 940   | 940   | 920   | 880   | 810   |
| scenario 4        | 810       | 800  | 850  | 910   | 960   | 1.000 | 1.000 | 1.000 | 1.000 |
| scenario 5        | 810       | 800  | 890  | 1.000 | 1.200 | 1.500 | 1.800 | 2.200 | 2.700 |
| scenario 6        | 810       | 800  | 870  | 970   | 1.100 | 1.300 | 1.500 | 1.700 | 2.000 |
| scenario 7        | 810       | 800  | 850  | 910   | 940   | 1.000 | 1.100 | 1.100 | 1.200 |
| scenario 8        | 810       | 800  | 850  | 910   | 960   | 1.100 | 1.200 | 1.300 | 1.500 |
| scenario 9        | 810       | 810  | 910  | 1.100 | 1.200 | 1.400 | 1.700 | 1.800 | 1.900 |
| scenario 10       | 810       | 810  | 890  | 990   | 1.100 | 1.200 | 1.300 | 1.400 | 1.400 |
| scenario 11       | 810       | 800  | 870  | 940   | 970   | 980   | 960   | 920   | 850   |
| scenario 12       | 810       | 810  | 870  | 930   | 990   | 1.000 | 1.100 | 1.100 | 1.100 |
| scenario 13 (BAU) | 810       | 810  | 910  | 1.100 | 1.200 | 1.500 | 1.900 | 2.400 | 2.800 |
| scenario 14 (BAU) | 810       | 810  | 890  | 990   | 1.100 | 1.300 | 1.600 | 1.800 | 2.100 |
| scenario 15 (BAU) | 810       | 800  | 870  | 940   | 970   | 1.000 | 1.100 | 1.200 | 1.200 |
| scenario 16 (BAU) | 810       | 810  | 870  | 930   | 990   | 1.100 | 1.300 | 1.400 | 1.500 |

Figure 85 shows how emission projections depend on different transport demand scenarios. The graph shows the emission trajectories for the four BAU scenarios, all assuming modest increase in efficiency after 2030, a constant share of fuel used in ECAs and a modest increase in the share of LNG in the fuel mix. It demonstrates that the highest transport demand scenario results in emissions that are over twice as large as the lowest transport demand scenario. This ratio is also apparent in the other scenario families.

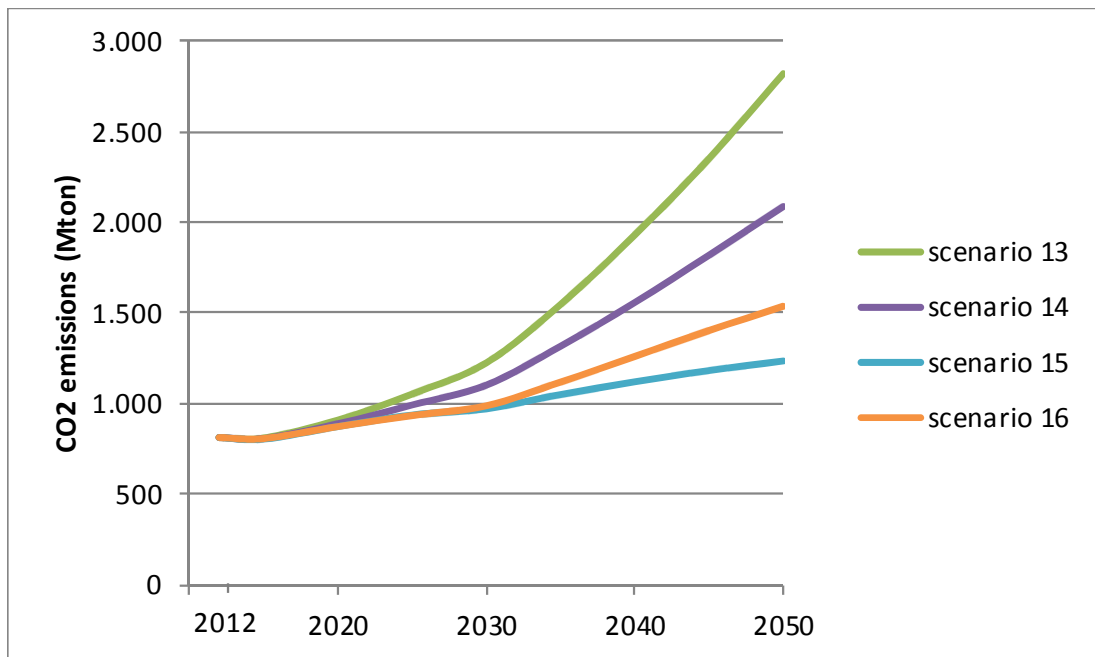


Figure 85 Emissions projections for the BAU transport demand scenarios.

Figure 86 analyses the impact of the fuel/ECA and efficiency scenarios. It shows for one transport demand scenario (RCP 8.5 SSP 5, i.e. high economic growth and high fossil fuel use) the impact of different assumptions on the other scenario parameters. The two lower projections assume an efficiency improvement of 60% instead of 40% over 2012 fleet average levels in 2050. The first and third projections have a 25% share of LNG in the fuel mix in 2050 instead of a share of 8%. Under these assumptions, improvements in efficiency have a larger impact on emissions trajectories than changes in the fuel mix.

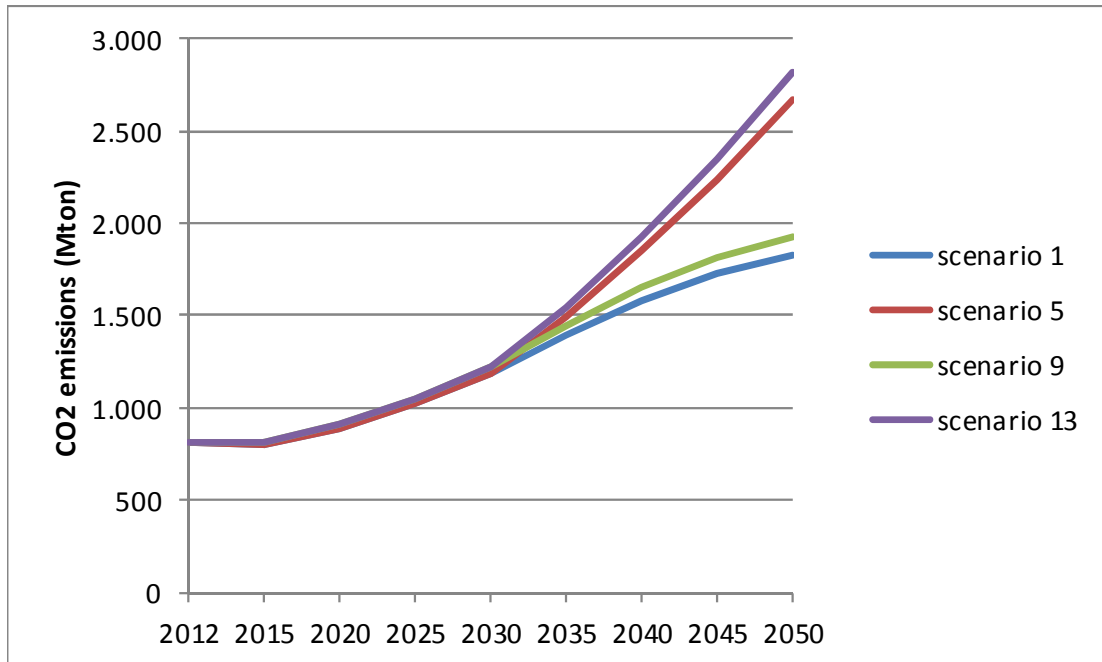


Figure 86 Output for demand scenarios under conditions of high LNG/extra ECA and high efficiency.

Figure 87 shows the contribution of various ship types to the total emissions in one scenario. Utilised cargo vessels (container and general cargo ships) are projected to show a rapid increase in number and in emissions. In comparison, emissions from other ship types, such as dry bulk and liquid bulk carriers, grow at a lower rate or decline as a result of improvements in efficiency and (in this case) limited growth of transport demand. While in other scenarios the relative contributions of ship types will be different, all scenarios show a larger increase in

emissions from unitised cargo ships than from other ship types. While unitised cargo ships accounted for a little over 40% of maritime transport CO<sub>2</sub> emissions in 2012, they are projected to account for 50% or more by 2025 in all scenarios. In scenarios with a high economic growth, they are projected to account for two-thirds by 2045 or 2050.

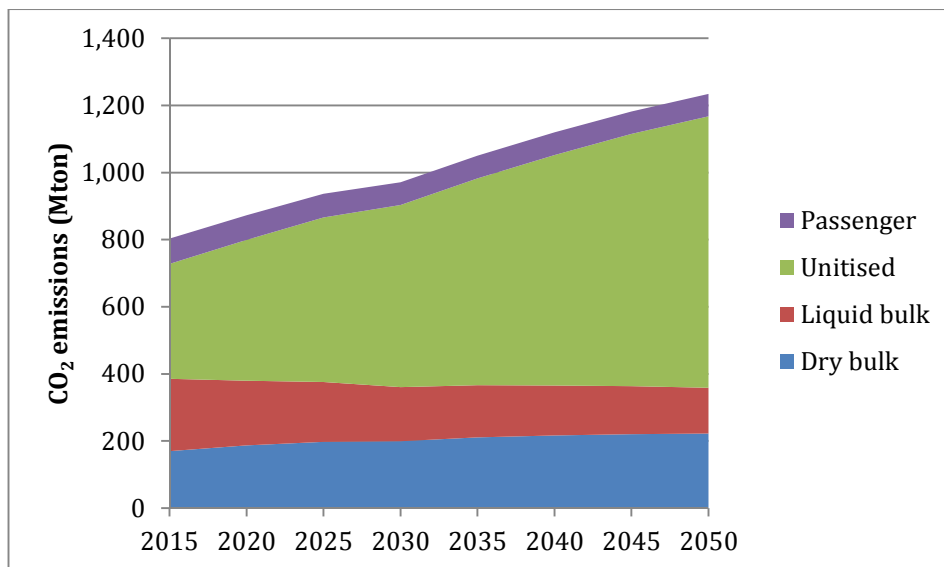


Figure 87 Specific output for scenario 15 (RCP4.5, SSP3, low LNG/no additional ECA, low efficiency).

### 3.3.3. Results for other substances

Table 79 shows the projection of the emissions of other substances. For each year, the median, minimum and maximum emissions are expressed as a share of their 2012 emissions. Most emissions increase in parallel with CO<sub>2</sub> and fuel, with minor changes due to changes in the fuel mix. However, there are some notable exceptions:

- Methane emissions are projected to increase rapidly (albeit from a very low base) as the share of LNG in the fuel mix increases. In high ECA/high LNG scenarios, the increase is naturally higher than in the constant ECA/low LNG scenarios.
- HFC emissions result from leakage of refrigerants and coolants and are a function of the number of ships rather than of the amount of fuel used.
- Emissions of nitrogen oxides increase at a lower rate than CO<sub>2</sub> emissions as a result of the replacement of old engines by Tier 1 and Tier 2 engines and the increasing share of LNG in the fuel mix. In addition, the engines of new ships in ECAs will meet Tier 3 requirements, so scenarios that assume an increase in the share of fuel used in ECAs show a slower increase in NO<sub>x</sub> emissions or in some scenarios a decrease.
- Emissions of sulphurous oxides and PM emissions also increase at a lower rate than CO<sub>2</sub> emissions. This is driven by MARPOL Annex VI requirements on the sulphur content of fuels (which also impact PM emissions). In scenarios that assume an increase in the share of fuel used in ECAs, the impact of these regulations is stronger.

Table 79 Emissions of CO<sub>2</sub> and other substances in 2012, 2020 and 2050.

|                           |                  | Scenario                 | 2012<br>index<br>(2012 =<br>100) | 2020<br>index<br>(2012 = 100) | 2050<br>index<br>(2012 = 100) |
|---------------------------|------------------|--------------------------|----------------------------------|-------------------------------|-------------------------------|
| Greenhouse gases          | CO <sub>2</sub>  | Low LNG                  | 100                              | 112 (107 - 112)               | 237 (105 - 347)               |
|                           |                  | High LNG                 | 100                              | 109 (105 - 109)               | 224 (99 - 328)                |
|                           | CH <sub>4</sub>  | Low LNG                  | 100                              | 1.700 (1.600 -<br>1.700)      | 14.000 (6.000 -<br>20.000)    |
|                           |                  | High LNG                 | 100                              | 7.900 (7.500 -<br>7.900)      | 42.000 (19.000 -<br>61.000)   |
|                           | N <sub>2</sub> O | Low LNG                  | 100                              | 112 (107 - 112)               | 236 (104 - 345)               |
|                           |                  | High LNG                 | 100                              | 109 (104 - 109)               | 218 (97 - 319)                |
|                           | HFC              |                          | 100                              | 108 (105 - 108)               | 214 (109 - 302)               |
|                           | PFC              |                          | -                                | -                             | -                             |
| SF <sub>6</sub>           |                  | -                        | -                                | -                             |                               |
| Other relevant substances | NO <sub>x</sub>  | Constant ECA             | 100                              | 110 (106 - 110)               | 209 (93 - 306)                |
|                           |                  | More ECAs                | 100                              | 103 (98 - 103)                | 169 (75 - 247)                |
|                           | SO <sub>x</sub>  | Constant<br>constant ECA | 100                              | 66 (63 - 66)                  | 39 (17 - 56)                  |
|                           |                  | More ECAs                | 100                              | 57 (54 - 57)                  | 25 (11 - 37)                  |
|                           | PM               | Constant ECA             | 100                              | 99 (95 - 99)                  | 197 (87 - 288)                |
|                           |                  | More ECAs                | 100                              | 83 (80 - 83)                  | 126 (56 - 184)                |
|                           | NMVO<br>C        | Constant ECA             | 100                              | 112 (107 - 112)               | 238 (105 - 348)               |
|                           |                  | More ECAs                | 100                              | 110 (105 - 110)               | 227 (101 - 333)               |
|                           | CO               | Constant ECA             | 100                              | 115 (111 - 115)               | 268 (119 - 392)               |
|                           |                  | More ECAs                | 100                              | 127 (122 - 127)               | 320 (142 - 468)               |

### 3.3.4. Sensitivity to productivity and speed assumptions

The scenario approach to these results allows an evaluation of the sensitivity of maritime transport emissions to economic growth, fossil fuel energy use, marine fuel mix, market-driven or regulatory efficiency changes and maritime emissions regulation.

This section discusses the most important remaining sensitivity, i.e. the impact of productivity and speed assumptions on emissions projections.

All the projections presented here assume that the productivity of the fleet returns to long-term average values without increasing the emissions of individual ships. This is possible if the cause of the current low productivity is a low cargo load factor of ships. If, however, fleet productivity has decreased because ships have been laid up or have slowed down, a return to long-term average productivity levels would result in higher emissions.

There are no data that enable the evaluation of whether cargo load factors are below their long-term average levels and if so by how much. The data on speed and days at sea do show that ships have slowed down and reduced their number of days at sea since 2007. Productivity of container ships and bulkers in 2007 was at or near a 15-year maximum, while for tankers it was declining but still above the long-term average. Hence, these factors have contributed to a reduction in productivity.

Figure 88 shows the impact of our assumption that the productivity of different ship types will return to its long-term average values on the emissions projections. For reasons of clarity, the



figure shows the impact on one scenario; however, the impact on other scenarios is similar. If it is assumed that the productivity of the fleet will remain at its 2012 level, CO<sub>2</sub> emissions will be 12% higher. This means that if the response to a transport demand increase is to add proportionately more ships to the fleet, rather than to increase the cargo load of ships, emissions will be 12% higher.

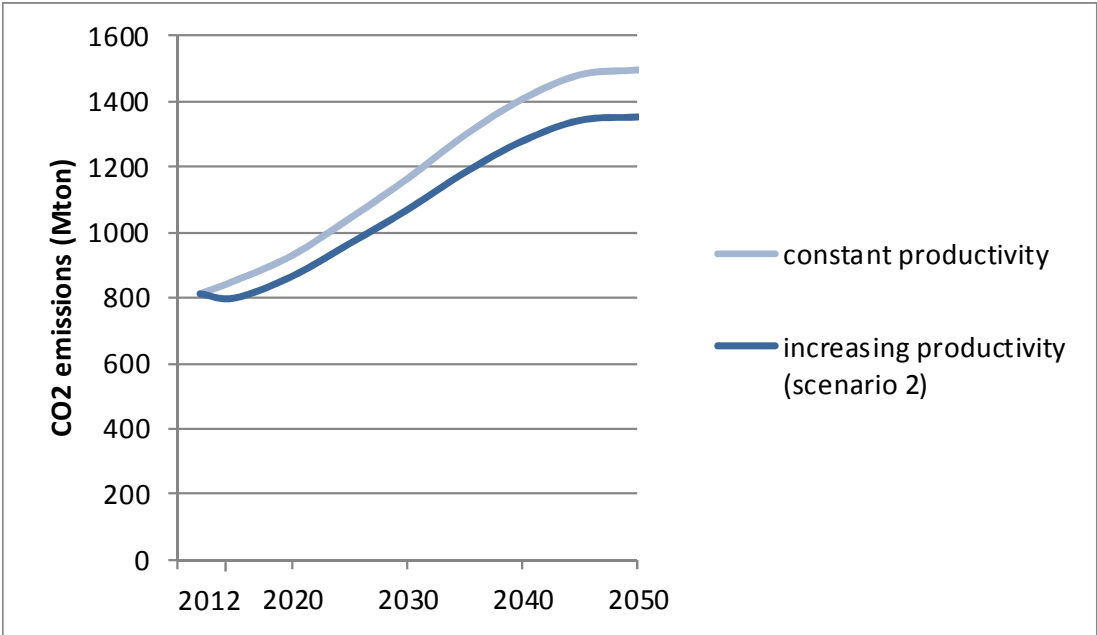


Figure 88 Impact of productivity assumptions on emissions projections.

There are other ways of increasing productivity than increasing the average cargo load. When demand increases and the size of the fleet cannot keep up with rising demand, a natural response is for ships to increase their speed. This also increases productivity. However, since fuel use and emissions per tonne-mile are roughly proportional to the square of the speed, a speed increase would result in emissions that are higher than emissions at constant productivity.

In sum, our emissions projections are sensitive to our assumption that productivity will revert to its long-term average value without increasing emissions per ship. If productivity remains constant (because ships will continue to operate at their current load factors, with their current number of days at sea and at their current speed), emissions are likely to be 10% higher than projected. If productivity increases because ships increase their speed at sea, emissions are likely to increase by a higher amount.

**3.3.5. Uncertainty**

There are two sources of uncertainty in the scenarios. The first is that the estimates of emissions in the base year have an uncertainty range, which has been discussed in Sections 0 and 1.5. As our emission projection model calculated future emissions on the basis of base-year emissions and relative changes in parameters (discussed in Section 3.2), uncertainty in the base-year carries forward into future years. The second source of uncertainty is that the future is, in itself, uncertain. This type of uncertainty is addressed by showing different scenarios. While the scenarios are stylised representations of the future, and have no uncertainty of their own, uncertainty is introduced by the fact that each of the BAU scenarios is equally likely to occur. Hence, on top of the uncertainty in the base-year emissions, there is uncertainty in future developments that increases over time.

**3.4. Main results**

Maritime emissions projections show an increase in fuel use and GHG emissions in the period up to 2050, despite significant regulatory and market-driven improvements in efficiency. Depending on future economic and energy developments, our BAU scenarios project an

increase of 50–250% in the period up to 2050. Further action on efficiency and emissions can mitigate emissions growth, although all scenarios but one project emissions in 2050 to be higher than in 2012. The main driver of the emissions increase is the projected rise in demand for maritime transport. This rise is most pronounced in scenarios that combine the sustained use of fossil fuels with high economic growth and is lower in scenarios that involve a transition to renewable energy sources or a more moderate growth pattern.

Among the different cargo categories, demand for transport of unitised cargoes is projected to increase most rapidly in all scenarios.

The emissions projections show that improvements in efficiency are important in mitigating emissions growth but even the most significant improvements modelled do not result in a downward trend. Compared to regulatory or market-driven improvements in efficiency, changes in the fuel mix have a limited impact on GHG emissions, assuming that fossil fuels remain dominant.

The projections are sensitive to the assumption that the productivity of the fleet, which is currently low, will revert to its long-term average by taking more cargo on board. If productivity does remain at its current level, or if it increases by increasing the number of days at sea or ship speed, emissions are likely to increase to a higher level.

## Bibliography for Main Report and Annexes

Ackermann, G. and Planitz, W. (2009). *Electrical engineering, power generation and distribution*, in Meier-Peter, H., Bernhardt, F. (ed.), *Compendium of Marine Engineering*, Seehafen Verlag, Hamburg, Germany.

AEA (2010). *HFC consumption and emissions forecasting containing an update to the June 2008 HFC projections*.

Alphaliner, various years. *Alphaliner Fleet Stats, Cellular Fleet (monthly)*. Singapore; London: Alphaliner.

Anink, D. and Marnix K. (2011). *Analysis of the effects of the new EEDI requirements on Dutch build and flagged ships*, Zoetermeer, CMTI.

Baltic Ports Organization Secretariat (2012). *Implications of new regulation regarding sulphur content in ship's fuel on maritime transport sector within Baltic Sea Region on the basis of the TransBaltic and Baltic Ports Organization's Port Debate: Implications of the IMO regulations on the future pattern of the cargo flow in the Baltic held on 15th June 2012 in Helsinki, Finland*. Helsinki, Transbaltic.

Barcelona, E. (2012). *The Joint Organization Data Initiative – Oil (JODI Oil) in APEC*, presented at the Institute of Energy Economics, Japan 2012.

Bazari, Z. and Longva, T. (2011). *Assessment of IMO Mandated Energy Efficiency Measures for International Shipping (MEPC 63/INF.2)*, London, Lloyd's register ; DNV.

BIMCO (2013). Mike Corkhill, *Feature: All gassed up and ready for the new Panama Canal*. News Articles September 2013.

Boden, T. A., Andres, R. J. and Marland, G. (2013). *Global, Regional, and National Fossil-Fuel CO<sub>2</sub> Emissions, Period of Record 1751–2010*, Carbon Dioxide Information Analysis Center (CDIAC).

BRS (2013). *Shipping and Shipbuilding Markets, Annual Review*, Paris: Barry Rogliano Salles (BRS).

BRS (2009). *Barry Rogliano Salles, Shipping and Shipbuilding markets. Annual Review*.

Buhaug, Ø., Corbett, J. J., Endresen, Ø., Eyring, V., Faber, J., Hanayama, S., Lee, D. S., Lee, D., Lindstad, H., Markowska, A. Z., Mjelde, A., Nelissen, D., Nilsen, J., Pålsson, C., Winebrake, J. J., Wu, W. and Yoshida, K. (2009). *Second IMO GHG Study 2009*, International Maritime Organization (IMO), London: IMO, 2009.

CE Delft (2013). Unpublished manuscript. *Estimated Index Values of New Ships: Analysis of EIVs of Ships That Have Entered The Fleet Since 2009*, Delft: CE Delft.

CE Delft, (2012) Jasper Faber (CE Delft), Brigitte Behrends (Marena Ltd.), David S. Lee Dagmar Nelissen (CE Delft), Martine Smit (CE Delft). *The Fuel Efficiency of Maritime Transport: Potential for improvement and analysis of barriers*, Delft: CE Delft.

Compressed Gas Association (1990) *Handbook of Compressed Gases*, Springer, USA.

CONCAWE (2012). Lane, M. *European Refining Outlook to 2030: Technical & Economic Challenges*, presented at European Forum for Science and Industry Roundtable: Scientific Support to EU Refining Capacity, 1 October 2012.

ContPort Consult (2013). N. Vallø, *Are the terminals ready for ULCVs – indeed they are! container ship update*, News from DNV to the container ship industry, No. 01 2013.

Danish Ship Finance, 2014.

Data and information on various ship types, retrieved March 2014 from <http://www.shipfinance.dk/en/SHIPPING-RESEARCH>

Cooper D. and Gustafsson, T. (2004). *Methodology for calculating emissions from ships: update on emission factors*. (IVL 2004).

Danish EPA (2003). *Evaluation of the possibilities of substituting potent greenhouse gases (HFCs, PFCs and SF6)*.

Deloitte (2013). *Exporting the American Renaissance, Global impacts of LNG exports from the United States*, Deloitte Center for Energy Solutions and Deloitte MarketPoint LLC.

DNV (2012). Shipping 2020.

DNV GL (2014). Chryssakis, C., Bolland, O., Tvette, H. A. and Brandsæter, A. *Alternative fuels for shipping*, Position Paper 1–2014.

DNV GL USA (2013)a. Mr Peter Noble from Noble Associates in “LNG Ship characteristics” in DNV GL “LNG as a fuel” course presentation.

DNV GL USA (2013)b. Mr Tony Teo from DNV GL in “LNG as a marine fuel” in “DNV GL LNG as a fuel” course presentation.

Doulgeris G., Korakianitis T., Pilidis P and Tsoudis E. (2012). *Techno-economic and environmental risk analysis for advanced marine propulsion systems*. Applied Energy 99 1–12.

DuPont (2005). Isceon series refrigerants, Product bulletin, [http://www2.dupont.com/Refrigerants/en\\_US/assets/downloads/k10940\\_ISCEON\\_MO89\\_pib.pdf](http://www2.dupont.com/Refrigerants/en_US/assets/downloads/k10940_ISCEON_MO89_pib.pdf).

Eide, M. S., Chryssiakis, C. and Endresen, Ø. (2013). *CO<sub>2</sub> abatement potential towards 2050 for shipping including alternative fuels*, Carbon Management 4,3, 275–289.

Eide, M. S., Endresen, Ø. Mjelde, A., Mangset, L. E. and Gravir, G. (2007). *Ship emissions of the future*. Deliverable D.1.2.3.2, QUANTIFY project.

ENTEC (2002). *Quantification of emissions from ships associated with ship movements between ports in the European Community*. UK: Report prepared for the European Commission; 2002. [http://ec.europa.eu/environment/air/pdf/chapter2\\_ship\\_emissions.pdf](http://ec.europa.eu/environment/air/pdf/chapter2_ship_emissions.pdf) [Accessed 26 June 2014] EPA, 2006, SF6 Leak Rates from High Voltage Circuit Breakers – U.S. EPA Investigates Potential Greenhouse Gas Emissions Source.

EPA (2014). *Designation of North American Emission Control Area to Reduce Emissions from Ships*.

EPA (2014). *Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990–2012*.

EPA (2007). Samulski, M. *Estimation of Particulate Matter Emissions Factors for Diesel Engines on Ocean-Going Ships*, 2007.

European Community (2007). *The Analysis of the Emissions of Fluorinated Greenhouse Gases from Refrigeration and Air Conditioning Equipment Used in the Transport Sector Other Than Road Transport and Options for Reducing These Emissions*, (DG Environment) 07010401/2006/445124/MAR/C4.

Eyring, V., Köhler, H. W., Lauer, A. and Lepmer, B. (2005). *Emissions from international shipping: 2. Impact of future technologies on scenarios until 2050*. Journal of Geophysical Research, 110, Issue D17306, 15 September 2005.

Gas in focus (2014). *Evolution global LNG carrier fleet*, retrieved March 2014 from <http://www.gasinfocus.com/en/downloads/>.

Heppner, T. G., and Breslin, M. M. (2009). *Accuracy of Petroleum Supply Data*, feature article in Petroleum Supply Monthly, Energy Information Administration, [http://www.eia.doe.gov/petroleum/supply/monthly/archive/2009/2009\\_02/pdf/art0902.pdf](http://www.eia.doe.gov/petroleum/supply/monthly/archive/2009/2009_02/pdf/art0902.pdf).

Holtrop J. and Mennen G. G. (1982). *An approximate power prediction method*.

IEA (2013). *World Energy Statistics* (Edition: 2013). Beyond 2020 dataset.

IGU (2013). International Gas Union, *World LNG Report – 2013 Edition*.

IMO (2014)a. *Sulphur oxides (SO<sub>x</sub>) – Regulation 14*, International Maritime Organization retrieved March 2014 from [http://www.imo.org/OurWork/Environment/PollutionPrevention/AirPollution/Pages/Sulphur-oxides-\(SOx\)-%E2%80%93-Regulation-14.aspx](http://www.imo.org/OurWork/Environment/PollutionPrevention/AirPollution/Pages/Sulphur-oxides-(SOx)-%E2%80%93-Regulation-14.aspx).

IMO (2014)b. *Special Areas under MARPOL*, International Maritime Organization retrieved March 2014 from <http://www.imo.org/OurWork/Environment/PollutionPrevention/SpecialAreasUnderMARPOL/Pages/Default.aspx>.

IMO (2014)c. Press Briefings, *IMO Marine Environment Protection Committee completes 66<sup>th</sup> session, 10, April 7, 2014*, International Maritime Organization retrieved March 2014 from <http://www.imo.org/MediaCentre/PressBriefings/Pages/10-MEPC-66-ends.aspx#.U3NjndJDFoA>.

IMO (2014)d. *Nitrogen Oxides (NO<sub>x</sub>) – Regulation 13*, International Maritime Organization retrieved March 2014 from [http://www.imo.org/OurWork/Environment/PollutionPrevention/AirPollution/Pages/Nitrogen-oxides-\(NOx\)-%E2%80%93-Regulation-13.aspx](http://www.imo.org/OurWork/Environment/PollutionPrevention/AirPollution/Pages/Nitrogen-oxides-(NOx)-%E2%80%93-Regulation-13.aspx).

IMO (2013). MEPC 65/4/9, 26 February 2013, *Sulphur monitoring programme for fuel oils for 2012*.

IMO (2012)a. MEPC 63/23, Annex 8, 2012 *Guidelines on the Method of Calculation of the Attained Energy Efficiency Design Index (EEDI) for New Ships*.

IMO (2012)b. MEPC 64/4, 19 March 2012, *Sulphur monitoring for 2011*.

IMO (2011). MEPC 62/4, 28 February 2011, *Sulphur monitoring for 2010*.

IMO (2010). MEPC 61/4, 16 February 2010, *Sulphur monitoring for 2009*.

IMO (2009). MEPC 59/4/1, 3 February 2009, *Sulphur monitoring for 2008*.

IMO (2008). MEPC 57/4/24, 8 February 2008, *Sulphur monitoring for 2007*.

- IMO (2002). SOLAS Chapter V, *Regulation 19.2 – Carriage requirements for shipborne navigational systems and equipment*.
- INTERTANKO (2012). *Leading the way, making the difference*, Annual Review and Report 2011/2012.
- IPCC (2007). *Climate change 2007: The physical science basis. Contribution of Working Group I to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change, Chapter 2: Changes in atmospheric constituents and in radiative forcing*, Cambridge University Press, UK.
- IPCC (2013). *Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change*, Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA.
- IPCC/TEAP (2005). *Special Report: Safeguarding the Ozone Layer and the Global Climate System*.
- ITU (2010). *Technical characteristics for an automatic identification system using time-division multiple access in the VHF maritime mobile band*. International Telecommunications Union, Geneva.
- IVL (2004). Cooper, D., Gustafsson, T., *Methodology for calculating emissions from ships: 1. Update of emission factors*, IVL (Swedish Environmental Research Institute).
- Jalkanen, J.-P., Johansson L. and Kukkonen, J. (2014). *A comprehensive inventory of the ship traffic exhaust emissions in the Baltic Sea from 2006 to 2009*, *Ambio*, 43, 311–324.
- Jalkanen, J.-P., Johansson, L., Kukkonen, J., Brink, A., Kalli, J. and Stipa, T. (2012). *Extension of an assessment model of ship traffic exhaust emissions for particulate matter and carbon monoxide*, *Journal of Atmospheric Chemistry and Physics*, 12, 2641–2659.
- Jarne, G., Sánchez-Chóliz, J. and Fatás-Villafranca, F. (2005). *'S-shaped' Economic Dynamics. The Logistic and Gompertz curves generalized*, *The Electronic Journal of Evolutionary Modeling and Economic Dynamics*, No. 1048.
- Johnson H., Johansson M., Andersson, K. and Södahl, B. (2013). *Will the ship energy efficiency management plan reduce CO<sub>2</sub> emissions? A comparison with ISO 50001 and the ISM code*, *Maritime Policy & Management* 40, 2, 177–190.
- Kristensen H. O. (2012). *Energy demand and exhaust gas emissions of marine engines*, Project No. 2010–56, Emissionsbeslutningsstøttesystem, Work Package 2, Report No. 05, September.
- Kunz, P., & Gorse, P. (2013). *Development of high-speed engines for natural gas operation in tugs*. ().Tugnology '13.
- Le Quéré, C., Raupach, M. R., Canadell, J. G., Marland, G. et al. (2009). *Trends in the sources and sinks of carbon dioxide*, *Nature Geoscience*, DOI: 10.1038/NGEO689.
- Lloyd's List (2012). *Panama Canal expansion to enable 80% of LNG fleet to transit*, Monday 18 June 2012.
- Lloyds Register (1995). *Marine Exhaust Emissions Research Programme*, Lloyd's Register Engineering Services, London, UK.
- Lloyd's Register Marine and UCL Energy Institute (2014). *Global Marine Fuel Trends 2030*.

- MAN Diesel & Turbo (2012). *SFOC Optimization Methods for MAN B&W Two-Stroke*, IMO Tier II Engines.
- Marine Regions (2014). [http://www.marineregions.org/stats\\_downloads.php](http://www.marineregions.org/stats_downloads.php).
- MARINTEK (2010). Nielsen, J.B., Stenersen, O. Emission factors for CH<sub>4</sub>, NO<sub>x</sub>, particulates, and black carbon for domestic shipping in Norway, revision 1, Report MT22 A 10-199.
- MARINTEK (2014). Einang, Per Magne, *LNG som drivstoff for skip – fremtidig utvikling*, Nordic Gas Conference.
- Marland, G. (2008). *Uncertainties in Accounting for CO<sub>2</sub> From Fossil Fuels*, Journal of Industrial Ecology, 12, 2, DOI: 10.1111/j.1530-9290.2008.00014.x.
- Miyazaki, K., Eskes, H. J., and Sudo, K. (2012). *Global NO<sub>x</sub> emission estimates derived from an assimilation of OMI tropospheric NO<sub>2</sub> columns*, Journal of Atmospheric Chemistry and Physics, 12, 2263–2288, doi:10.5194/acp-12-2263-2012, 2012.
- Morel, C. (2013). *IEA data on international marine bunkers*, Expert Workshop on the update of GHG emissions estimate for international shipping. IEA, London, 26 February 26 2013.
- Myśków, J. and Borkowski, T. (2012). *Emission inventory of exhaust gases from oil-fired ship boilers*, Journal of KONES Powertrain and Transport, 19, 4, 487–494.
- Nielsen, J. and Stenersen, D. (2010). *Emission factors for CH<sub>4</sub>, NO<sub>x</sub>, Particulates and Black Carbon for Domestic Shipping in Norway, revision 1* (MARINTEK 2010).
- Olivier, J. G. J. and Peters, J. A. H. W. (2002). *Uncertainties in global, regional, and national emissions inventories*. In *Non-CO<sub>2</sub> greenhouse gases: Scientific understanding, control options and policy aspects*, edited by Van Ham, J., Baede, A. P. M., Guicherit, R. and Williams-Jacobse, J. G. F.M. New York: Springer.
- OPEC (2012). Annual Statistical Bulletin 2012.
- Paxian, A., Eyring, V., Beer, W., Sausen, R. and Wright, C. (2010). *Present-day and future global bottom-up ship emission inventories including Polar routes*, Environmental Science & Technology. 44, 1333–1339.
- Peters, G. P., Andrew, R. M., Boden, T., Canadell, J. G., Ciais, P., Le Quéré, C.; Marland, G.; Raupach, M. R. and Wilson, C. (2013). *The challenge to keep global warming below 2°C*. Nature Climate Change 2013, 3, 1, 4–6.
- Platts (2013). Hussain, Mohd Ramthan, *Asia gears up for LPG Tsunami*, Insight Magazine, October 2013.
- Port of Long Beach Emissions Inventory 2012*, Available: <http://www.polb.com/environment/air/emissions.asp>.
- Prpić-Oršić, J. and Faltinsen, O. M. (2012). *Estimation of ship speed loss and associated CO<sub>2</sub> emissions in a seaway*. Ocean Engineering, 44, 1–10.
- Qatargas (2014). *Future Fleet*, retrieved March 2014 from <https://www.qatargas.com/English/AboutUs/Pages/FutureFleet.aspx>.
- RS Platou (2014). *Tankers fleet by size table and Bulk carriers fleet by size table*, retrieved March 2014 from [http://www.platou.com/dnn\\_site/Tables/Tankersfleetbysize.aspx](http://www.platou.com/dnn_site/Tables/Tankersfleetbysize.aspx) and [http://www.platou.com/dnn\\_site/Tables/Bulkcarriersfleetbysize.aspx](http://www.platou.com/dnn_site/Tables/Bulkcarriersfleetbysize.aspx).

Sarvi, A, Fogelholm, C.J. and Zevenhoven, R. (2008). *Emissions from large-scale medium-speed diesel engines: 1. Influence of engine operation mode and turbocharger*, Fuel Processing Technology, 89, 510–519.

Schneider Electric (2003). *Cahier technique no. 188: SF<sub>6</sub> properties, and use in MV and HV switchgear*.

Scott, R. (1994). *IEA, the first 20 years: origins and structure*. Paris, France, Organisation for Economic Co-operation and Development (OECD).

Smith, T., O’Keeffe E., Aldous, L. and Agnolucci, P. (2012). *Assessment of shipping’s efficiency using satellite AIS data*. Prepared for the International Council on Clean Transportation.

Smith, S. J., Van Aardenne, J., Klimont, Z., Andres, R. J., Volke, A. and Delgado Arias, S. (2011). *Anthropogenic sulfur dioxide emissions: 1850–2005*, Journal of Atmospheric Chemistry and Physics, 11, 1101–1116, doi:10.5194/acp-11-1101-2011, 2011.

Starcrest (2013). *Port of Los Angeles Inventory of Air Emissions 2012*, Available: [http://www.portoflosangeles.org/pdf/2012\\_Air\\_Emissions\\_Inventory.pdf](http://www.portoflosangeles.org/pdf/2012_Air_Emissions_Inventory.pdf)

Stopford, M. (2009). *Maritime Economics, 3rd edition*, Taylor & Francis, London.

TransBaltic (2012). *Implications of new regulation regarding sulphur content in ship’s fuel on maritime transport sector within Baltic Sea Region on the basis of the TransBaltic and Baltic Ports Organization’s Port Debate: Implications of the IMO regulations on the future pattern of the cargo flow in the Baltic held on 15th June 2012 in Helsinki, Finland*.

UNCTAD (2013). *Review of Maritime Transport 2013*, Report by the UNCTAD Secretariat. United Nations Conference on Trade and Development, Geneva.

UNEP (2010). *Report of the Refrigeration, Air Conditioning and Heat Pumps – Technical Options Committee*.

U.S. DOT (2013). *Panama Canal Expansion Study, Phase I Report, Developments in Trade and National Global Economics*, U.S. Department of Transportation, Maritime Administration November 2013.

Wärtsilä (2011). Haraldson, L. *LNG as a fuel for environmentally friendly shipping*, 33rd Motorship Propulsion & Emissions Conference, Copenhagen, Denmark.

Wärtsilä (2014). *Solutions for marine and oil and gas markets*.

World Bank (2013). DataBank. Website: <http://databank.worldbank.org/data/views/reports/tableview.aspx>.

World Bank (2010). *Databank of SF<sub>6</sub> gas emissions (thousand metric tons of CO<sub>2</sub> equivalent)*. <http://data.worldbank.org/indicator/EN.ATM.SF6G.KT.CE>, [Accessed 26 June 2014].



## Third IMO GHG Study 2014 Annex Contents

|   |     |
|---|-----|
| Third IMO GHG Study 2014 Annex Contents .....   | 174 |
| Annex 1 (details for Section 1.2, bottom-up method) .....   | 176 |
| IHSF technical data and method for populating missing data .....  | 176 |
| IHSF operational data .....   | 176 |
| Estimating ship activity over the course of a year using AIS data .....   | 182 |
| Sources and spatial and temporal coverage .....   | 182 |
| Pre-Processing AIS data .....   | 182 |
| Multi-MMSI merging .....  | 185 |
| Extrapolating ship annual profile to generate complete annual operational profiles .....                                  | 188 |
| Assumptions for auxiliary and boiler power demands .....  | 190 |
| Assumptions for main and auxiliary fuel type .....  | 197 |
| Assumptions for hull fouling and deterioration over time .....  | 197 |
| Assumptions for the impact of weather on fuel consumption .....   | 198 |
| Activity and fleet data merger .....  | 198 |
| Bottom-up model calculation procedure .....   | 199 |
| Powering subroutine: Power_at_op .....  | 200 |
| Emissions subroutine: Emissions_at_op .....   | 202 |
| Aggregation by ship type and size .....   | 202 |
| Fleet estimate assembly .....   | 202 |
| Annex 2 (details for Section 1.3, inventory results) .....  | 203 |
| 2011 Detailed Results .....   | 204 |
| 2010 Detailed Results .....   | 206 |
| 2009 Detailed Results .....   | 208 |
| 2008 Detailed Results .....   | 210 |
| 2007 Detailed Results .....   | 212 |
| Annex 3 (details for Section 1.4, bottom-up QA/QC) .....  | 214 |
| Activity estimate quality of spatial coverage .....   | 214 |
| Activity estimates temporal coverage QA/QC .....  | 219 |
| Fleet technical data quality .....  | 224 |
| Noon report data for activity and fuel consumption quality assurance .....  | 225 |
| Description of noon report data .....   | 225 |
| Method for processing noon report data in preparation of comparison against bottom-up model output .....                  | 226 |
| Results of noon report and bottom-up output quality assurance of activity estimate and fuel consumption (all years) ..... | 228 |
| Annex 4 (details for Section 1.5.1, top-down uncertainty analysis) .....  | 248 |
| Organization of top-down uncertainty analysis .....   | 248 |
| Ongoing data quality efforts related to uncertainty in fuel sales .....   | 248 |
| Review of EIA accuracy analyses (estimation of percentage error) .....  | 248 |
| IEA sources of uncertainties that can be quantified for this work .....   | 250 |
| Estimates of potential adjustment to top-down statistics .....  | 250 |
| Export-import misallocation .....   | 250 |
| Transfers category reporting .....  | 252 |
| Data accuracy .....   | 253 |
| Results of top-down uncertainty analysis .....  | 254 |
| Uncertainty in top-down allocations of international and domestic shipping .....  | 256 |
| Annex 5 (details of Section 1.5.2 bottom-up inventory uncertainty analysis) .....   | 258 |
| Sources of uncertainty in IMO GHG Study 2009 .....  | 258 |
| Overview of sources of uncertainty in current work .....  | 258 |
| Uncertainty in the emissions from a ship in 1 hour .....  | 260 |
| Estimate of uncertainty of the input parameters .....   | 260 |
| Uncertainty in the aggregation of hourly emissions into annual emissions .....  | 264 |
| Uncertainty in the aggregation of a fleet of ship's emissions .....   | 266 |

|  |     |
|--|-----|
| Annex 6 (details for Section 2, other GHG emissions and relevant substances).....        | 269 |
| Emission Factors .....   | 269 |
| Method for selecting/developing baseline and actual emission factors .....               | 269 |
| Baseline emission factors .....  | 270 |
| SFOCs.....   | 272 |
| Fuel Correction Factors – NO <sub>x</sub> , SO <sub>x</sub> , PM, N <sub>2</sub> O ..... | 273 |
| Annex 7 (details for Section 3).....   | 277 |
| The emissions projection model .....   | 277 |
| Analysis of historical transport work data.....  | 277 |
| Introduction.....  | 277 |
| Methodology .....  | 278 |
| Results .....  | 279 |
| Sensitivities .....  | 281 |
| Fleet productivity projections .....   | 281 |
| Historical Ship Productivity .....   | 282 |
| Ship Productivity Projection .....   | 286 |
| Remarks/Caveats .....  | 287 |
| Ship size projections.....   | 287 |
| Container ships.....   | 289 |
| Oil tankers .....  | 293 |
| Dry bulk carriers .....  | 296 |
| Liquefied gas carriers .....   | 299 |
| Regulatory and autonomous efficiency improvements.....                                   | 303 |
| EEDI and SEEMP .....   | 303 |
| Fuel mix.....  | 311 |
| Market and regulatory drivers .....  | 311 |
| Fuel mix scenarios used in emissions projection model.....                               | 313 |
| Emission factors .....   | 315 |
| Emission factors .....   | 315 |
| CO <sub>2</sub> .....  | 315 |
| CH <sub>4</sub> .....  | 316 |
| N <sub>2</sub> O.....  | 316 |
| HFC .....  | 316 |
| PFC .....  | 317 |
| SF <sub>6</sub> .....  | 318 |
| NO <sub>x</sub> .....  | 318 |
| NMVOC .....  | 319 |
| CO .....   | 319 |
| PM.....  | 319 |
| SO <sub>2</sub> .....  | 320 |
| Detailed results.....  | 321 |

## Annex 1 (details for Section 1.2, bottom-up method)

### IHSF technical data and method for populating missing data

Ship specific technical data was sourced from the IHS Maritime's Fairplay (IHSF) vessel characteristics database which the consortium had access to quarterly datasets from 2007-2012. The coverage (percent of fields with valid data) and quality of each of the fields utilized is different between fields.

In order to develop a complete ship technical dataset for the project, gap filling was performed for selected fields. The only fields listed above that were not gap filled were: Statcode3, Statcode5, propulsion type, number of screws, and date of build. Gap filling was performed using the average value for each ship class, sub class, and capacity bin for the technical fields and use of the ship's date of build for substitution for missing keel laid date. The IMO GHG Study 2009 employed a lower resolution of classes so resulting in more ships in each bin compared to this study, which utilizes a higher resolution of classes and subclasses resulting in fewer and more similar ships per bin. The IMO GHG Study 2009 used a regression fit based on tonnage or power depending on the field being backfilled, while the update uses an average over the subclass/capacity bins. This change has negligible effects on the gap filling results and due to the higher resolution of ship classes/sub classes/capacity bins; the overall result has a higher level of certainty than the IMO GHG Study 2009. A summary of the fields and methods is shown in Table 1. The quality assurance and quality control implications of this gap filling will be discussed in greater detail in Section 1.4.

**Table 1: Data gap filling methods by IHSF ship technical field.**

| Field                       | Gap      |   |
|-----------------------------|----------|---|
|                             | Filling? | Gap Fill Method                             |
| Statcode3                   | No       | na  |
| Statcode5                   | No       | na  |
| gt                          | Yes      | Average of class, sub class, & capacity bin |
| dwt                         | Yes      | Average of class, sub class, & capacity bin |
| length                      | Yes      | Average of class, sub class, & capacity bin |
| beam                        | Yes      | Average of class, sub class, & capacity bin |
| max draught                 | Yes      | Average of class, sub class, & capacity bin |
| ship speed                  | Yes      | Average of class, sub class, & capacity bin |
| installed main engine power | Yes      | Average of class, sub class, & capacity bin |
| RPM                         | Yes      | Average of class, sub class, & capacity bin |
| main engine consumption     | Yes      | Average of class, sub class, & capacity bin |
| total consumption           | Yes      | Average of class, sub class, & capacity bin |
| propulsion type             | No       | na  |
| number of screws            | No       | na  |
| date of build               | No       | na  |
| keel laid date              | Yes      | Default to date of build                    |

### IHSF operational data

As stated above, IHSF provides a ship status field, which has the following field designations:

- In service/commission
- Laid-up
- Launched
- Keel laid
- On order/not completed

- Under construction
- Converting/rebuilding
- U.S. reserve fleet
- In casualty or repairing
- To be broken up
- Projected

The ship status field has 100% coverage for the entire 2007 through 2012 IHSF datasets. The data quality for this and other IHSF fields is discussed later. The intended use of the field for the project is to assist with the extrapolation of activity data captured through AIS. Because we have the field on a quarterly basis, tracking the field by quarter can help inform the extrapolation process. For example, if a ship is observed for half a year, the quarterly ship status data could inform that the ship was either laid up, in service, or under repair. If laid up or under repair, the extrapolation process would not assume activity for periods in which the ship was not observed.

The operational IHSF fields are used in a similar manner to the IMO GHG Study 2009 in that they are used to inform whether a ship's state was active or in another state, however for this Study we have access to quarterly IHSF datasets from 2007 through 2012 whereas the IMO GHG Study 2009 utilized one year (with no quarterly resolution). This study uses more parameter fields in IHSF than the IMO GHG Study 2009, although it should be noted that the data field quality is assumed to be the same between the two studies.

IHSF divides all ships into four groups: cargo carrying, non-merchant, non-seagoing merchant, and work ships. Each ship group can have one to multiple ship classes, as presented in Table 2 below.

For the cargo carrying group, ship classes are subdivided into sub classes based on Statcode3 designations and further subdivided by Statcode5 designations, as presented in Table 3. The cargo carrying group is the most complex of the four IHSF groups in terms of classes and sub classes.

**Table 2. IHSF ship groups and classes.**

| Ship Group                     | Ship Class   |
|--------------------------------|--|
| Cargo Carrying Transport Ships | 1. Bulk carrier<br>2. Chemical tanker<br>3. Container<br>4. General cargo<br>5. Liquefied gas tanker<br>6. Oil tanker<br>7. Other liquids tanker<br>8. Ferry-passengers (pax) only<br>9. Cruise<br>10. Ferry-roll-on/passengers (RoPax)<br>11. Refrigerated cargo<br>12. Roll-on/Roll-off (Ro-Ro)<br>13. Vehicle |
| Non Merchant Ships             | 14. Yacht<br>15. Miscellaneous – fishing <sup>1</sup>  |
| Non Seagoing Merchant Ships    | 16. Miscellaneous – other <sup>2</sup>   |
| Work Ship                      | 17. Service – tug<br>18. Offshore<br>19. Service - other   |

Notes: <sup>1</sup> Miscellaneous-fishing ships fall into non merchant ships and non seagoing merchant ships

<sup>2</sup> Miscellaneous-other ships fall into non seagoing merchant ships and work ships

**Table 3: Cargo carrying category: class, sub-class, and StatCode5 designations.**

| Ship Class      | Sub Class               |                                       | Statcode5 Designations                              |                                      |
|-----------------|-------------------------|---------------------------------------|---|--------------------------------------|
| Bulk carrier    | Bulk Dry                | A21A2BC                               | Bulk Carrier  |                                      |
|                 |                         | A21A2BG                               | Bulk Carrier, Laker Only                            |                                      |
|                 |                         | A21A2BV                               | Bulk Carrier (with Vehicle Decks)                   |                                      |
|                 | Other Bulk Dry          | A21B2BO                               | Ore Carrier   |                                      |
|                 |                         | A24A2BT                               | Cement Carrier                                      |                                      |
|                 |                         | A24B2BW                               | Wood Chips Carrier                                  |                                      |
|                 |                         | A24B2BW                               | Wood Chips Carrier, self unloading                  |                                      |
|                 |                         | A24C2BU                               | Urea Carrier  |                                      |
|                 |                         | A24D2BA                               | Aggregates Carrier                                  |                                      |
|                 |                         | A24E2BL                               | Limestone Carrier                                   |                                      |
|                 |                         | A24G2BS                               | Refined Sugar Carrier                               |                                      |
|                 |                         | A24H2BZ                               | Powder Carrier                                      |                                      |
|                 |                         | Self Discharging Bulk Dry             | A23A2BD   | Bulk Cargo Carrier, self discharging |
|                 | A23A2BD                 |                                       | Bulk Carrier, Self-discharging                      |                                      |
| Bulk Dry/Oil    | A23A2BK                 | Bulk Carrier, Self-discharging, Laker |   |                                      |
|                 | A22A2BB                 | Bulk/Oil Carrier (OBO)                |   |                                      |
|                 | A22B2BR                 | Ore/Oil Carrier                       |   |                                      |
| Chemical tanker | Chemical                | A12A2TC                               | Chemical Tanker                                     |                                      |
|                 |                         | A12B2TR                               | Chemical/Products Tanker                            |                                      |
|                 |                         | A12E2LE                               | Edible Oil Tanker                                   |                                      |
|                 |                         | A12H2LJ                               | Fruit Juice Tanker                                  |                                      |
|                 |                         | A12G2LT                               | Latex Tanker  |                                      |
|                 |                         | A12A2LP                               | Molten Sulphur Tanker                               |                                      |
|                 |                         | A12D2LV                               | Vegetable Oil Tanker                                |                                      |
|                 |                         | A12C2LW                               | Wine Tanker   |                                      |
| Container       | Container               | A33A2CR                               | Container Ship (Fully Cellular with Ro-Ro Facility) |                                      |
|                 |                         | A33A2CC                               | Container Ship (Fully Cellular)                     |                                      |
|                 |                         | A33B2CP                               | Passenger/Container Ship                            |                                      |
| General cargo   | General Cargo           | A31A2GA                               | General Cargo Ship (with Ro-Ro facility)            |                                      |
|                 |                         | A31A2GE                               | General Cargo Ship, Self-discharging                |                                      |
|                 |                         | A31A2GO                               | Open Hatch Cargo Ship                               |                                      |
|                 |                         | A31A2GT                               | General Cargo/Tanker                                |                                      |
|                 |                         | A31A2GX                               | General Cargo Ship                                  |                                      |
|                 |                         | A31B2GP                               | Palletised Cargo Ship                               |                                      |
|                 |                         | A31C2GD                               | Deck Cargo Ship                                     |                                      |
|                 |                         | Other Dry Cargo                       | A38A2GL   | Livestock Carrier                    |
|                 |                         |                                       | A38B2GB   | Barge Carrier                        |
|                 |                         |                                       | A38C2GH   | Heavy Load Carrier                   |
|                 |                         |                                       | A38C3GH   | Heavy Load Carrier, semi submersible |
|                 |                         |                                       | A38C3GY   | Yacht Carrier, semi submersible      |
|                 | A38D2GN                 |                                       | Nuclear Fuel Carrier                                |                                      |
|                 | Passenger/General Cargo | A38D2GZ                               | Nuclear Fuel Carrier (with Ro-Ro facility)          |                                      |
|                 |                         | A32A2GF                               | General Cargo/Passenger Ship                        |                                      |

| Ship Class               | Sub Class             | Statcode5 Designations                       |
|--------------------------|-----------------------|--|
| Liquefied tanker         | gas Liquefied Gas     | A11C2LC CO <sub>2</sub> Tanker               |
|                          |                       | A11A2TN LNG Tanker                           |
|                          |                       | A11B2TG LPG Tanker                           |
|                          |                       | A11B2TH LPG/Chemical Tanker                  |
| Oil tanker               | Oil                   | A13C2LA Asphalt/Bitumen Tanker               |
|                          |                       | A13E2LD Coal/Oil Mixture Tanker              |
|                          |                       | A13A2TV Crude Oil Tanker                     |
|                          |                       | A13A2TW Crude/Oil Products Tanker            |
|                          |                       | A13B2TP Products Tanker                      |
|                          |                       | A13A2TS Shuttle Tanker                       |
|                          |                       | A13B2TU Tanker (unspecified)                 |
| Other tanker             | liquids Other Liquids | A14H2LH Alcohol Tanker                       |
|                          |                       | A14N2LL Caprolactam Tanker                   |
|                          |                       | A14F2LM Molasses Tanker                      |
|                          |                       | A14A2LO Water Tanker                         |
| Ferry-pax only<br>Cruise | Passenger             | A37B2PS Passenger Ship                       |
|                          | Passenger             | A37A2PC Passenger/Cruise                     |
| Ferry-RoPax              | Passenger/Ro-Ro       | A36B2PL Passenger/Landing Craft              |
|                          | Cargo                 | A36A2PR Passenger/Ro-Ro Ship (Vehicles)      |
|                          |                       | A36A2PT Passenger/Ro-Ro Ship (Vehicles/Rail) |
| Refrigerated cargo       | Refrigerated Cargo    | A34A2GR Refrigerated Cargo Ship              |
| Ro-Ro                    | Ro-Ro Cargo           | A35C2RC Container/Ro-Ro Cargo Ship           |
|                          |                       | A35D2RL Landing Craft                        |
|                          |                       | A35A2RT Rail Vehicles Carrier                |
|                          |                       | A35A2RR Ro-Ro Cargo Ship                     |
| Vehicle                  | Ro-Ro Cargo           | A35B2RV Vehicles Carrier                     |

For each ship class a capacity bin system was used to further aggregate ships by either their physical size or cargo carrying capacity based on the following metrics: deadweight tonnage (dwt), twenty-foot equivalent units (teu), cubic meters (cbm), gross tonnage (gt), or vehicle capacity, as presented in Table 4. The capacity bins are the same for all ships in a class. Wherever possible, the size bins are aligned to the Second IMO GHG study, however because there are some differences in the Class definitions, there are also a few differences. It should be noted that the Update Study provides an improved and higher resolution by class/subclass/capacity bin than that used in the IMO GHG Study 2009.

**Table 4: Ship class capacity bins.**

| Ship Class             | Capacity Bin  | Capacity Units                     |
|------------------------|---|------------------------------------|
| Bulk carrier           | 0-9999<br>10000-34999<br>35000-59999<br>60000-99999<br>100000-199999<br>200000-+                              | Deadweight tonnage (dwt)           |
| Chemical tanker        | 0-4999<br>5000-9999<br>10000-19999<br>20000-+   | dwt                                |
| Container              | 0-999<br>1000-1999<br>2000-2999<br>3000-4999<br>5000-7999<br>8000-11999<br>12000-14500<br>14500-+             | twenty-foot equivalent units (teu) |
| Cruise                 | 0-1999<br>2000-9999<br>10000-59999<br>60000-99999<br>100000-+   | gross tons (gt)                    |
| Ferry-pax only         | 0-1999<br>2000-+  | gt                                 |
| Ferry-RoPax            | 0-1999<br>2000-+  | gt                                 |
| General cargo          | 0-4999<br>5000-9999<br>10000-+  | dwt                                |
| Liquefied gas tanker   | 0-49999<br>50000-199999<br>200000-+   | cubic meters (cbm)                 |
| Oil tanker             | 0-4999<br>5000-9999<br>10000-19999<br>20000-59999<br>60000-79999<br>80000-119999<br>120000-199999<br>200000-+ | dwt                                |
| Other liquids tankers  | 0-+   | dwt                                |
| Refrigerated cargo     | 0-1999  | dwt                                |
| Ro-Ro                  | 0-4999<br>5000-+  | gt                                 |
| Vehicle                | 0-3999<br>4000-+  | vehicles                           |
| Miscellaneous -fishing | All sizes   | gt                                 |
| Miscellaneous - other  | All sizes   | gt                                 |
| Offshore               | All sizes   | gt                                 |
| Service - other        | All sizes   | gt                                 |
| Service - tug          | All sizes   | gt                                 |
| Yacht                  | All sizes   | gt                                 |

It should be noted that because the basic method in Section 1.2 performs all calculations on a 'per ship' basis and minimizes the use of average assumptions applied across populations



of ships, there is a lesser need, than in the IMO GHG Study 2009, for the bins used to be representative of technical or operational homogeneity.

### Estimating ship activity over the course of a year using AIS data

The first stage in the BU model is the Pre-processor and Multi-AIS Merger phase where the ship activity of a ship throughout the year is generated from AIS data. The following section discusses the source data used in this phase and the individual steps involved.

#### Sources and spatial and temporal coverage

The deployment of the AIS technology has only been enforced in the last 10 years (IMO, 2002) and in the intervening years its coverage has greatly increased. Due to its creation as a collision detection system, receivers were largely deployed around port facilities and in traffic dense areas resulting in a lack of cover on the open ocean. In recent years, with the emergence of its use in other applications (e.g. security of ships in piracy zones), there has been greater demand for deployment of receivers globally. As a result, spatio-temporal coverage of the technology is ever increasing. The consortium has good confidence in this coverage for the latter years of the study (i.e. 2011 and 2012) but decreasing confidence for previous years. Although satellite AIS (S-AIS), which provides open ocean coverage, is available from 2010, it only has limited coverage for that year but improves greatly in 2011 and 2012. The different AIS sources used in this study is outlined in Table 5. The quality provided by this coverage is discussed in greater detail in Annex 5.

**Table 5: Amount of processed messages (in millions) in 2007 – 2012 for each terrestrial and satellite datasets. EMSA LRIT-data was only used for QA/QC of the bottom-up emission estimation.**

|                      | <i>Kystverket</i> | <i>Exact Earth</i> | <i>Marine Traffic</i> | <i>EMSA (AIS)</i> | <i>IHS</i>     | <i>Civic exchange</i> | <i>Starcrest compiled</i> | <i>EMSA (LRIT)</i> |
|----------------------|-------------------|--------------------|-----------------------|-------------------|----------------|-----------------------|---------------------------|--------------------|
| <b>Receiver type</b> | Satellite         | Satellite          | Terrestrial           | Terrestrial       | Terrestrial    | Terrestrial           | Terrestrial               | Satellite          |
| <b>Area</b>          | Global            | Global             | Global, coastal       | EU, coastal       | Global coastal | Hong Kong             | New York Area             | Global             |
| <b>2012</b>          | 162.3             | 519.0              | 1 731.0               | 1 308.0           | -              | 1.4                   | -                         | 9.9                |
| <b>2011</b>          | 142.0             | 159.0              | 1 769.0               | 1 100.0           | -              | 1.3                   | -                         | 9.9                |
| <b>2010</b>          | -                 | 34.4               | 334.5                 | 893.7             | -              | -                     | 1.5                       | 22.3               |
| <b>2009</b>          | -                 | -                  | -                     | -                 | 96.0           | -                     | -                         | 7.0                |
| <b>2008</b>          | -                 | -                  | -                     | -                 | 73.0           | -                     | -                         | -                  |
| <b>2007</b>          | -                 | -                  | -                     | -                 | 4.7            | -                     | -                         | -                  |

#### Pre-Processing AIS data

The first stage is to parse all the Terrestrial AIS (T-AIS) and S-AIS data to create consistent individual data files for each Maritime Mobile Service Identity (MMSI) as the MMSI is the key unique ID in AIS. Each source of AIS data needs to be parsed separately into a universal format to allow combined processing in later stages. Since AIS data was provided in various formats, a Pre-processor sub program was used for the processing of all AIS-data (see Figure 1 for a visual of the user interface of the Pre-processor). Together with this, there were requirements from the data providers that all ship locations be anonymised before the data was shared. This restricted the parsed data to the following fields:

- MMSI
- IMO unique code
- Time of message
- Speed over ground
- Draught

The Pre-processor facilitated the consortium partners to define their AIS-data structure (e.g. time stamp pattern, field indices). While most (typically more than 99%) of the AIS-data lines are successfully converted into the common selected format the remaining non-relevant, false messages are removed from the set. Such messages may contain the following:

- Incorrectly formatted dates
- Dynamic messages with no longitude, latitude or speed information
- Messages without 9-digit numeric MMSI codes. Valid MMSI codes are in the format MIDXXXXXX where the first three digits represent the Maritime Identification Digits (MID) and X is any figure from 0 to 9 (ITU, 2012).

Besides the task of parsing the information from one format to other, the Pre-processor adds a region identifier as an additional field into the output while the precise coordinates are omitted. To achieve this, the Pre-processor used locations defined by polygons (in the format of GIS shapefiles) which were obtained from Marine Regions (2014) to define the different sea regions shown in Figure 2.

Additionally, the Pre-processor adds a speed-over-ground estimate (knots) for processed Long Range Identification and Tracking (LRIT) data. LRIT data was not used to generate activity estimates, but as validation dataset. It is explored in greater detail in Annex 3. The speed estimate generated for LRIT is based on the ship coordinates and the time difference between two consecutive messages, since ship speed is not included in a LRIT-message.

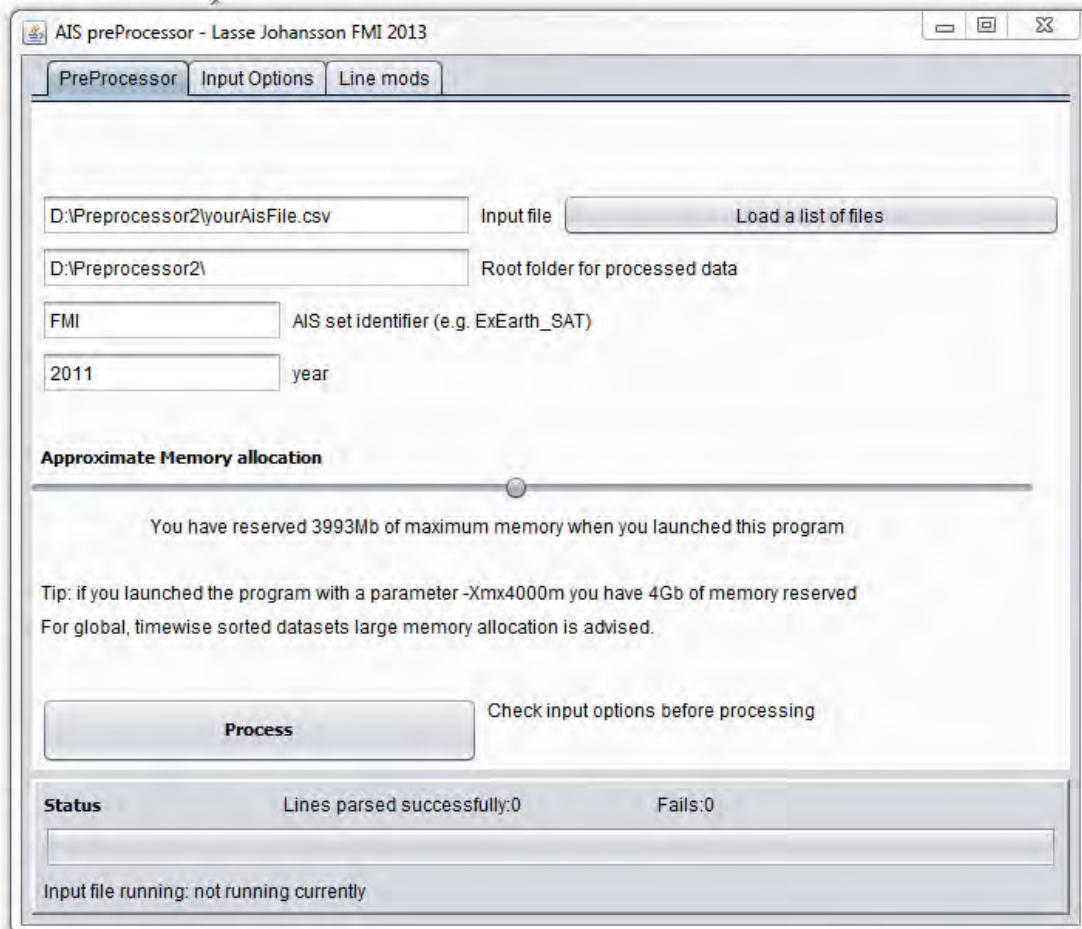


Figure 1: Standalone Pre-processor program with a graphic user interphase. The pre-processor has been programmed with Java.

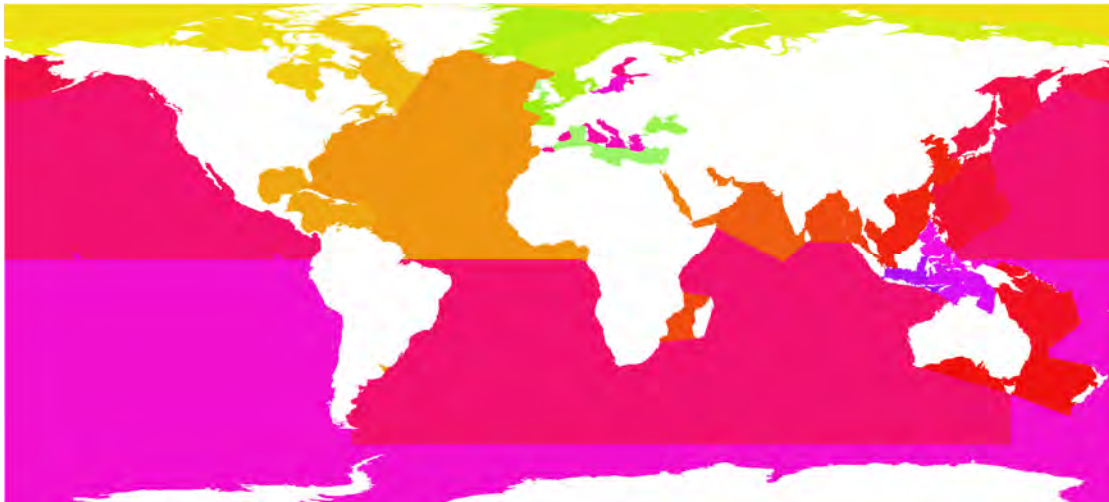


Figure 2: Sea region definition illustration. GIS-shapefile has been read by the Pre-processor. The resolution of the sea region mapping is 0.1 x 0.1 degrees.

There are 102 different sea regions as displayed in Figure 2. In the instance where a sea region is not found for any coordinate-pair, a valid sea region (1-102) is searched from the nearby cells with a search radius of 0.2 degrees. If a valid region is still not found then the region indicator is set to have the value of 0.

#### ***Emission Control Area mapping***

Certain areas of the world have special regulations that affect the maximum allowed fuel sulphur content. As fuel switching can occur in these areas to comply with these regulations, it was important to capture when ships were in the affected regions. While the northern European emission control area can be identified as a combination of discrete sea regions, the North-American emission control area (NA-ECA) is a more complex subset of the Atlantic Sea, Caribbean Sea and the Pacific. Using the geographical mapping of NA-ECA, EPA (2013), a custom polygon was added in the sea region identifier system (see Figure 3).




Figure 3: NA-ECA polygons drawn with Google Earth 2014.

#### ***Outputs from Preprocessing of Raw AIS data***

Following the parsing of the raw AIS messages, static and dynamic messages were merged to result in a “complete” activity report for that ship at that timestamp. As highlighted above, static messages and dynamic messages are linked through the MMSI number, with all information in a static message being associated with all the following dynamic messages

until the next static message is received and so forth. This results in an array of tuples (ordered list of elements) containing MMSI, IMO, time, speed, draught and message source region.

The 2012 and 2007 combined AIS datasets are shown in Figure 4.

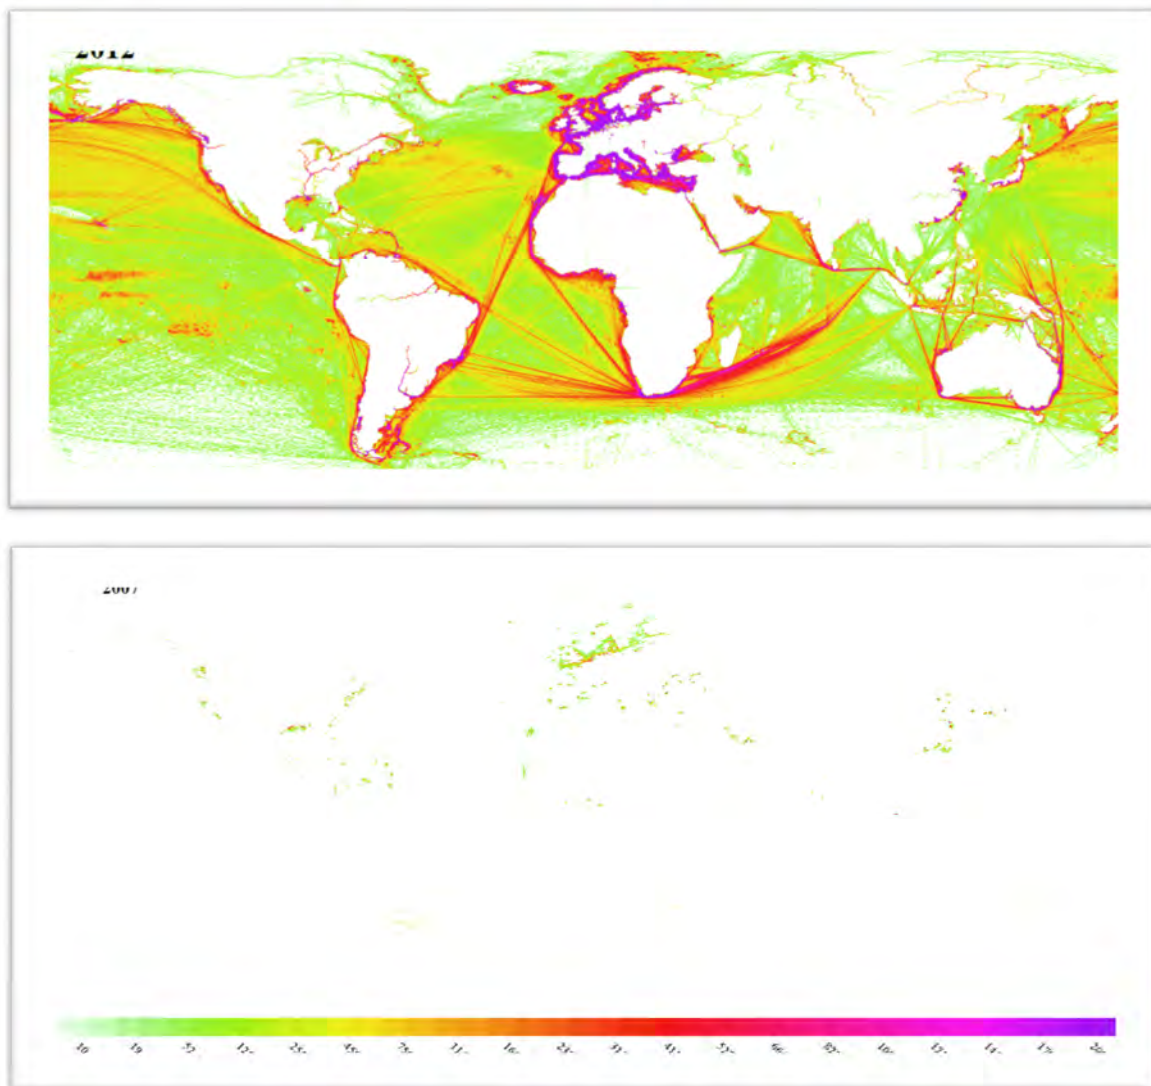

**Figure 4: Geographical distribution of AIS-messages processed by the Pre-processor for 2007 and 2012. All available AIS-datasets have been combined. Unit: total amount of messages per grid cell with an area of 0.2 x 0.2 degrees. Both plots contains the same scale.**

### Multi-MMSI merging

On conversion of all the raw AIS data into a universal format for combined processing, the next stage is the generation of a complete annual dataset for each ship. As a single ship may have had multiple MMSIs during a 12-month period (e.g. if the ship is re-flagged it will be assigned a new MMSI) associated with it, the initial merging process involves combining all ship specific messages into a single IMO file. Activity reports from all AIS sources are merged and sorted chronologically. IMO numbers are mapped to their associated MMSI according to the most recently report IMO for that ship. As discussed in the main report IMO numbers are only reported in the static message and therefore do not appear in every activity report. The data is then split into respective IMO ship activity reports, which could potentially have multiple MMSI's associated with the ship in any given year. The corollary applies with MMSIs potentially being spread across more than one ship if the MMSI has been reassigned within a year. Note that each year is processed separately with the starting IMO for a particular MMSI being set as the first reported IMO for that year.

If no IMO number was reported in any activity report for a particular MMSI, the ship is stored linked to its MMSI number. This results in two dataset groups: one with a series of ships saved under their IMO number and one with a series of ships stored under their MMSI.

Following the merging of the T-AIS and S-AIS data sources, the data is resampled to hourly estimators for each variable of interest: speed, draught and region. An aggregation time period of 1 hour was selected. The uncertainty within this hourly estimate for speed estimated is dealt with later in Annex 3.

Each field is resampled uniquely:

- Speed: The estimate of the speed at any time period is calculated as a time-weighted average of reported speed within that period. The weighting is the elapsed time to the next reported message. Figure 5 shows an example of this.
- Draught: The draught is taken as the maximum reported draught within that period. As per IMO number the draught is only reported in the static message, which appears less frequently. Thus, the effect of error in estimation is low. Moreover, the draught does not have the range of uncertainty that speed has across the hour and is typically only altered at the beginning of new voyages.
- Region classification: It is possible that a ship can be located in more than one region within the resampling period, if the ship crosses a region boundary within that period. In order to rationalize the data, the region of the ship is taken as the first reported region in that time period. As the regions are large and the region indicator is only used to understand the global geographic coverage of the datasets, it was assumed that this approach would not bias the overall coverage results as the number of ships crossing boundaries at each hourly interval is small in comparison with those located wholly within a region for the full hour duration.
- Organisation flag: This is simply a coverage flag used to note from what data source the ship was picked up in. For the resampling of this variable, the first recorded activity report in the hour was taken as the hourly resampled value. This variable is shown in the plot in Figure 6.

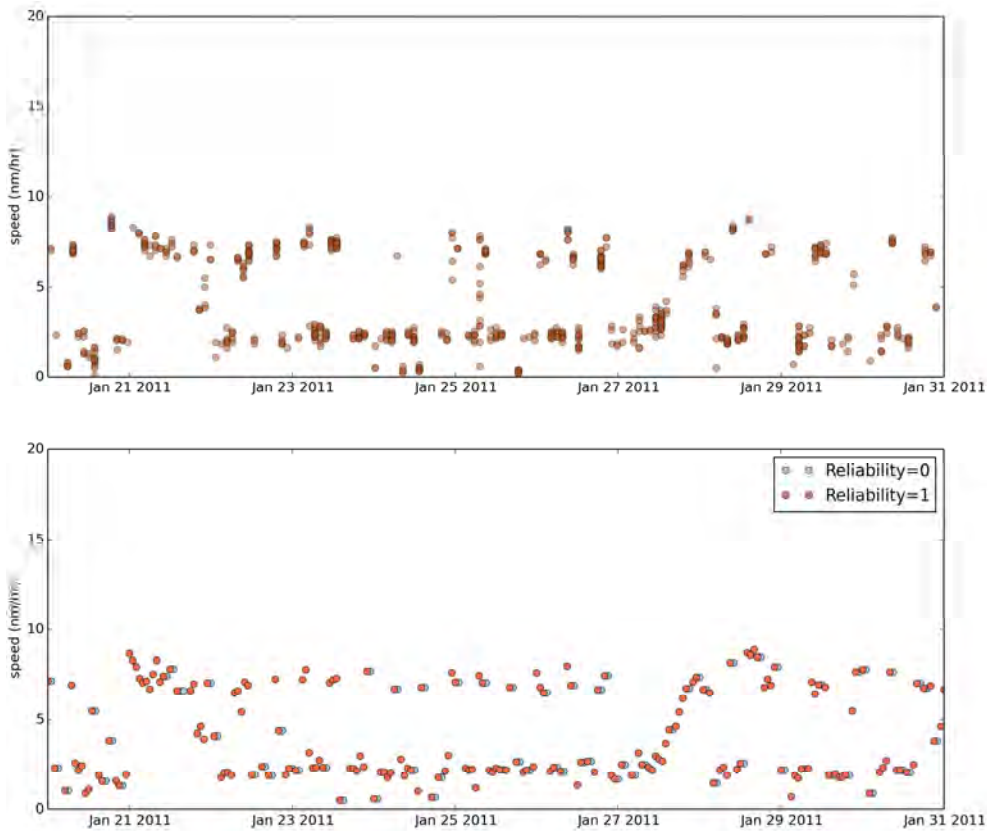


Figure 5: Top plot shows the reported speed for an indicative ship between 15<sup>th</sup> January 2011 and 31 January 2011, with each message having an opacity of 50% so that density is apparent. The lower plot shows the same ship with the speeds resampled. A reliability of 0 indicates that there was no activity report for that resampled hour.

On completion of the resampling, the datasets are matched to their respective ship technical characteristics and the data anonymised by removing the IMO and MMSI codes.

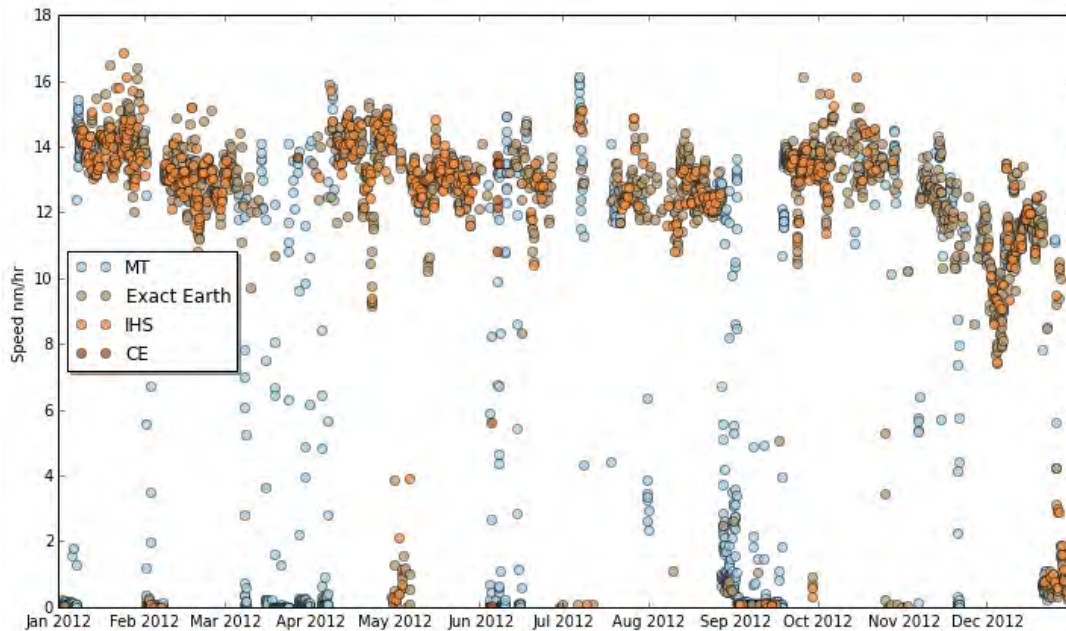


Figure 6: Example plot of coverage indicated by source of data.

## Extrapolating ship annual profile to generate complete annual operational profiles

As discussed above, the coverage of activity reports varies temporally and spatially, with significant improvements in later years. However to determine the emissions for the global fleet over the whole year, a complete hourly dataset of speed and draught for each ship is required.


This is done by correcting for biases in each year of data. A linear extrapolation is not suitable in most cases as the data is often biased towards shore based data particularly in years 2007 to 2009 which do not have satellite data and are therefore naturally biased towards shore based reports. Together with this, satellite data will be bunched around the period that the ship is in range of the satellite.

As a result a method was developed that disaggregated the full year activity reports into discrete trips comprising a port phase, a transition and a voyage phase. Each trip is considered discretely with infilling of missing data drawn from in phase samples.

The algorithm defines the phases as below:

- Port/anchor phase: any activity report with a speed of less than 3nm/hr. This is consistent with the days at port definition used throughout this report.
- Voyage phase: Characterised by a speed over ground above a calculated threshold and a standard deviation of less than 2 nm/hr within a 6 hour rolling window. This threshold is the 90% percentile of speeds reported above 3nm/hr.
- Transition phase: This is defined as the period when a ship is transiting in and out of port or anchor. It is the remaining activity reports that have not been classified as port or voyage.

The phases are displayed visually in Figure 7 for an example ship.

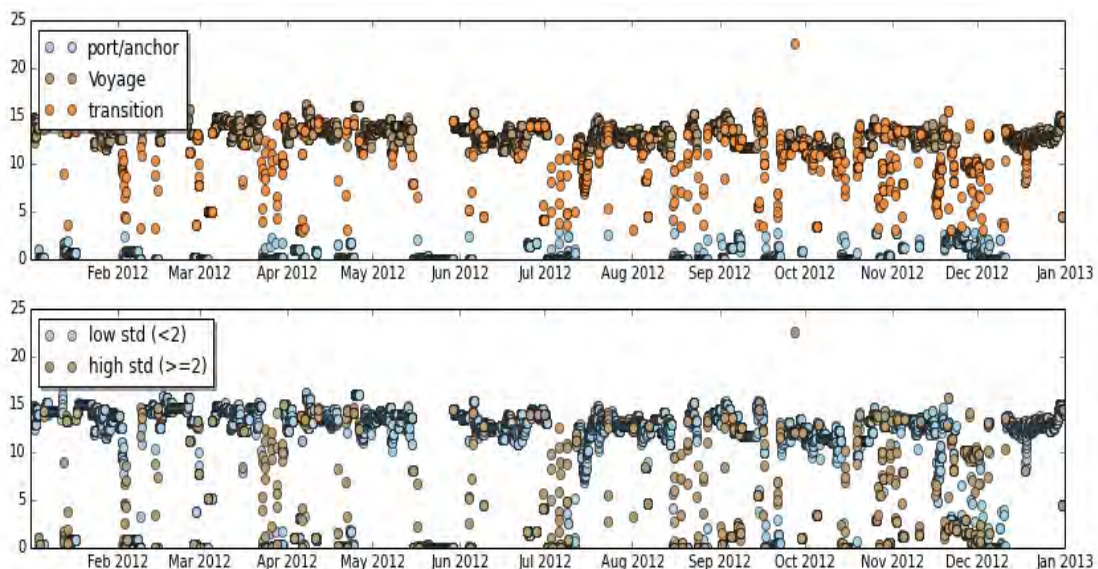

**Figure 7: Characterisation of ship phases used in the extrapolation algorithm for an example vlcc ship in 2012. The top plot shows the phase labels for each data point at given speeds (y-axis) and the lower plot classifies the data into high and low standard deviation of speed with a 6 hour window.**

The process of extrapolation follows the steps below:


- Speeds greater than 1.5 times the design speed of the ship are removed.
- Each hour where an activity report exists is classified as one of the phases indicated above.
- The activity dataset is split by port activity, resulting in a sequence of discrete journeys.
- An acceptable missing period threshold is calculated as the median port to port time bounded by 6 and 72 hours.
- Where the contiguous missing periods are less than the missing period threshold, the intervening hours are randomly sampled from the set of reported speeds for that phase.
- Where the missing periods are greater than the missing period threshold, the whole voyage to which the contiguous missing periods belongs is stripped out and replaced with randomly sampled speeds from the full set of reported speeds.
- A reliability indicator is applied to each data point. Data points that are based on actual reports and those classified in step 4 are set as 1 and those sampled in step 5 are set as 0.

Naturally, the accuracy of the extrapolation would be improved by leveraging off the ship location information. However, as discussed in earlier sections, the location information was removed at the pre-processing phase.

An example of the extrapolation process is displayed in Figure 8. The first column plots display a snapshot of the speed time series for an example ship, followed by speed distribution for days at port and days at sea respectively. The final column displays the histogram plot for the speed in each state. The first row displays the raw data with the speed forward filled from the last activity report. The bar plots and the histogram are based on the combined dataset. The middle row displays only those data points for which there was an activity report. The final row displays the extrapolated speed indicated by reliability indicator. The plot labels indicate the respective captured points (i.e. there are a total of 8785 points in the year, of which 2245 contained actual activity reports. Following application of the extrapolation algorithm, 7170 were classified as having a reliability =1).

In the Figure 8 example, there were many activity reports missing in August the contiguous missing period was below the acceptable missing period threshold resulting in those missing data-points being resampled from in phase activity reports. However, for the period from July 17<sup>th</sup> to July 31<sup>st</sup> the missing data points were beyond the acceptable missing period threshold and thus the speed was sampled from the full activity report dataset. This results in data-points being selected from across all three phases and the resulting data-points appearing more random. The overall effect of the days at sea and the days at port can be seen in the histograms in the third column.



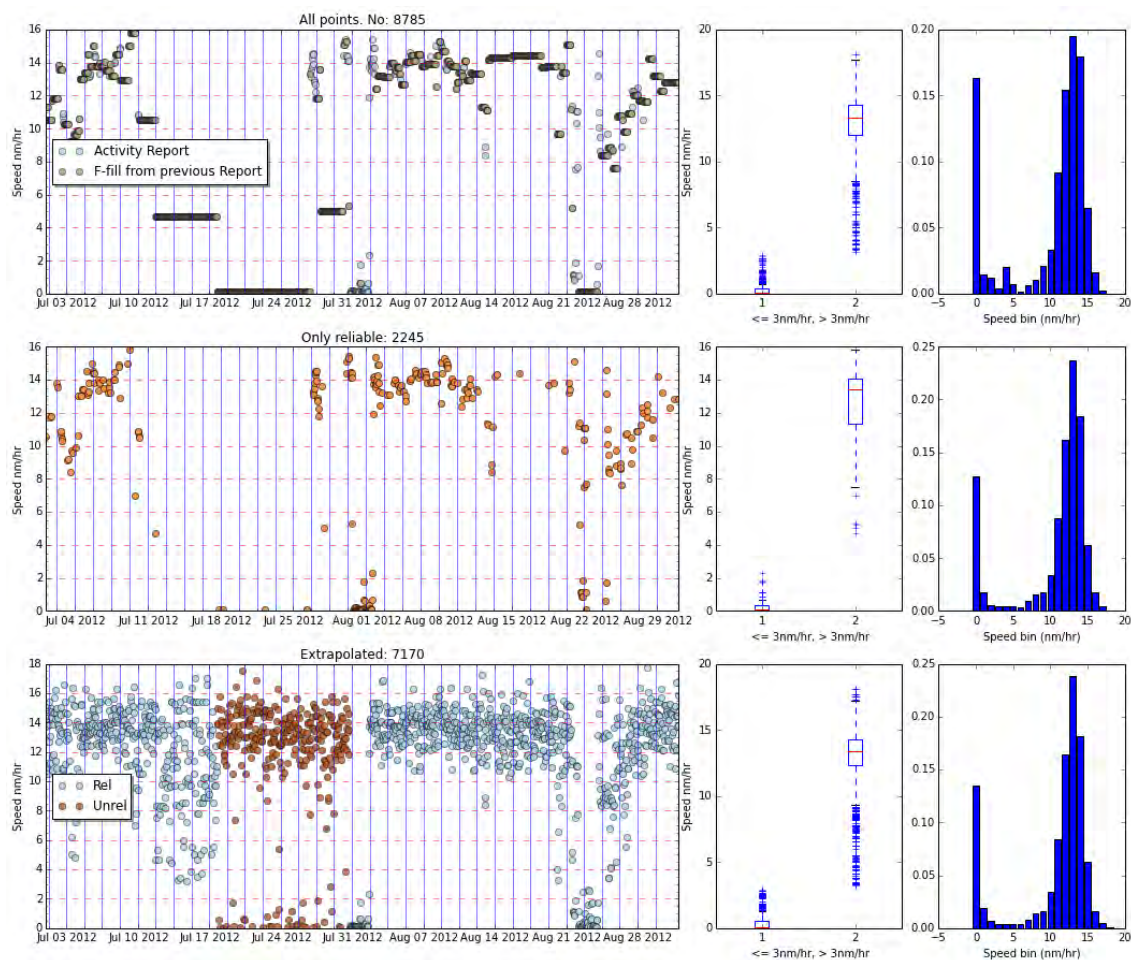

**Figure 8: Illustration of the extrapolation process.**

The application of the above method was considered acceptable for 2010 to 2012 AIS datasets. However, for previous years no satellite data was available which would inevitably lead to bias, notwithstanding the bias correction within the extrapolation algorithm. The adopted extrapolation method discussed above or a linear extrapolation would particularly affect the larger ships that would be out of range for greater periods of the year. Therefore, for the years 2007 to 2009, following the application of the extrapolation method, the datasets were further adjusted to align with an external source for the days at sea. This was applied using ‘best available’ data which corresponded to:

- In 2007 and 2008, the extrapolation algorithm is calibrated to the days at sea reported in the IMO GHG Study 2009 for the year 2007 (it is assumed that 2007 and 2008 saw similar operation)
- In 2009, the extrapolation algorithm is calibrated to the days at sea as analysed from the LRIT data in this year (see Annex 3 for greater discussion).

This had the dual effect of correcting the bias towards days in port (observed if only shore based AIS data is used) but also provided comparability with the IMO GHG Study 2009 estimates for emissions for the year 2007. Limited analysis of the quality of these assumptions is carried out in Section 1.4 (due to limitations in the availability of noon report data in these earlier years of the study), but extensive analysis of the assumption is carried out in Section 1.5 to test the consequence of missing AIS data on the uncertainty of the inventory.

### Assumptions for auxiliary and boiler power demands

Ship technical data are required to estimate ship emissions in the bottom-up model. The primary source of technical data used for this study is the IHS Maritime’s Fairplay ship registry database (IHSF). Ship technical data utilized from the IHSF datasets included:

Statcode3, Statcode5, gt, dwt, length, beam, max draught, ship speed, installed main engine power, engine revolutions per minute (RPM), various cargo capacity fields, date of build, keel laid date, propulsion type, number of screws, and main engine fuel consumption and stroke type. In addition to technical data, the IHSF dataset includes a ship status field that provides an indication if a ship is active, laid up, being built, etc. The consortium had access to quarterly IHSF datasets from 2007 through 2012. Each year's specific data was utilized for the individual annual estimates.

It should be noted that the datasets do not provide complete coverage for all ships and all fields needed. In the case where data are missing, values are estimated either from interpolation or from referencing another publicly available data source. The details of the approach taken for the missing data and the technical and operational data themselves are further discussed in Section 1.4.3 and in Annex 3.

For auxiliary engine operational profiles, neither IHSF nor the other ship characteristic data services provide auxiliary engine nor auxiliary boiler utilization data, by ship mode. In the IMO GHG Study 2009, auxiliary loads were estimated by assuming the number and load of auxiliary engines operated, by Ship class, and based the rated auxiliary engine power based on the limited data provided in IHS. To improve upon this approach, the consortium used Starcrest's Vessel Boarding Program (VBP) (Starcrest 2013) data that has been collected at the Port of Los Angeles, Port of Long Beach, Port Authority of New York & New Jersey, Port of Houston Authority, Port of Seattle, and Port of Tacoma. The VBP dataset includes over 1,200 ships of various classes. Starcrest has collected data on-board ships for over 15 years specifically related to estimating emissions from ships and validating its models. Auxiliary load (in kW) are recorded for at-berth, at-anchorage, maneuvering, and at-sea ship modes. The ship classes that have been boarded as part of the VBP include:

- bulk
- chemical tanker
- cruise
- oil tanker
- general cargo
- container
- refrigerated cargo

For container ships and refrigerated cargo ship classes, ship auxiliary engine and boiler loads (kW), by mode, were developed based from the VBP dataset and averages by ship class and size bin were used. This approach assumes that the ships boarded are representative of the world fleet for those same classes.

For bulk, chemical tanker, cruise, general cargo, and oil tanker, a hybrid approach was used combining VBP data, data collected from FMI, and the IMO 2009 approach. The prior study's approach was based average auxiliary engine rating (kW), assumption of number of engines running expressed in operational days per year (if greater than 365 then assumed more than one engine running), and a single load factor for each ship class and capacity bins. The hybrid method was used for ships boarded as part of the VBP, but was considered not to be a robust enough to use on its own. VBP data was used to compare to at-berth loads, the ratios between various modes, and to review the results for reasonableness of the estimates. The resulting ship weighted auxiliary loads estimated from this approach are presented in

Table 6.

**Table 6: Ship weighted auxiliary engine loads, by mode for selected ship classes, with VBP.**

| Ship Class      | Capacity Bin  | ME to Aux Ratio | # Aux Engines | # of Aux Running | Load Factor (LF) | Ship Weighted Average Auxiliary Engine Load (kW) |             |        |
|-----------------|---------------|-----------------|---------------|------------------|------------------|--|-------------|--------|
|                 |               |                 |               |                  |                  | At-Berth   | Maneuvering | At-Sea |
| Bulk            | 0-34999       | 5.50            | 3             | 1.16             | 0.6-0.7          | 280  | 310         | 190    |
|                 | 35000-59999   | 5.50            | 3             | 1.10             | 0.6-0.7          | 370  | 420         | 260    |
|                 | 60000+        | 5.50            | 3             | 1.23             | 0.6-0.7          | 600  | 680         | 420    |
| Chemical Tanker | 0-4999        | 2.40            | 3             | 1.10             | 0.5              | 160  | 110         | 80     |
|                 | 5000-19999    | 2.40            | 3             | 1.10             | 0.5              | 490  | 330         | 230    |
|                 | 20000+        | 2.40            | 3             | 1.23             | 0.5              | 1170   | 780         | 550    |
| Cruise          | 0-9999        | 2.50            | 3             | 2                | 0.7              | 450  | 580         | 450    |
|                 | 10000-99999   | 2.50            | 5             | 4                | 0.7              | 4200   | 5460        | 4200   |
|                 | 100000+       | 2.50            | 6             | 4                | 0.7              | 11480  | 14900       | 11480  |
| General Cargo   | 0-4999        | 3.30            | 3             | 1.12             | 0.5-0.6          | 120  | 90          | 60     |
|                 | 5000-9999     | 3.30            | 3             | 1.04             | 0.5-0.6          | 330  | 250         | 170    |
|                 | 10000+        | 3.30            | 3             | 1.12             | 0.5-0.6          | 970  | 730         | 490    |
| Oil Tanker      | 0-4999        | 3.75            | 3             | 1.16             | 0.5              | 250  | 375         | 250    |
|                 | 5000-9999     | 3.75            | 3             | 1.16             | 0.5              | 375  | 563         | 375    |
|                 | 10000-19999   | 3.75            | 3             | 1.16             | 0.5              | 625  | 938         | 625    |
|                 | 20000-59999   | 3.75            | 3             | 1.16             | 0.5              | 750  | 1125        | 750    |
|                 | 60000-79999   | 3.75            | 3             | 1.16             | 0.5              | 750  | 1125        | 750    |
|                 | 80000-119999  | 3.75            | 3             | 1.16             | 0.5              | 1000   | 1500        | 1000   |
|                 | 120000-199999 | 3.75            | 3             | 1.16             | 0.5              | 1250   | 1875        | 1250   |
|                 | 200000+       | 3.75            | 3             | 1.16             | 0.5              | 1500   | 2250        | 1500   |

For ship classes not previously boarded by the VBP, data collected by FMI was used to determine the ration between main engines and auxiliary engines, the number of engines assumed to be installed and running was derived from either the IMO GHG Study 2009 or by professional judgment. This information was used for the various ship classes and size bins to develop ship weighted average auxiliary engine loads in kW. Consistent with the IMO GHG Study 2009's approach, these loads are applied across all operational modes. The estimated average auxiliary engine loads for ship classes using FMI data is presented in Table 7.

**Table 7: Ship weighted auxiliary engine loads for selected ship classes, with FMI data.**

| Ship Class            | Capacity Bin | ME to Aux Ratio | # Engines | # of Eng Running | Load Factor (LF) | Ship Weighted Auxiliary Load (kW) |
|-----------------------|--------------|-----------------|-----------|------------------|------------------|-----------------------------------|
| Ferry-paxonly         | 0-1999       | 7.6             | 2         | 1                | 0.6              | 185                               |
| Ferry-paxonly         | 2000-+       | 3.0             | 3         | 1                | 0.6              | 525                               |
| Ferry-ropax           | 0-1999       | 4.9             | 2         | 1                | 0.6              | 105                               |
| Ferry-ropax           | 2000-+       | 4.9             | 3         | 1                | 0.6              | 710                               |
| Liquefied gas tanker  | 0-49999      | 2.9             | 3         | 1.10             | 0.5              | 240                               |
| Liquefied gas tanker  | 49999-+      | 2.9             | 3         | 1.23             | 0.5              | 1,710                             |
| Misc fishing          | 1            | 1.5             | 2         | 1                | 0.7              | 200                               |
| Miscellaneous - other | 1            | 2.2             | 2         | 1                | 0.7              | 190                               |
| Offshore              | 1            | 2.5             | 3         | 1                | 0.6-.07          | 320                               |
| Other service         | 1            | 2.2             | 3         | 1                | 0.5-0.7          | 220                               |
| Service-tug           | 1            | 10.2            | 2         | 1                | 0.5              | 50                                |
| Yachts                | 1            | 7.2             | 2         | 1                | 0.7              | 130                               |

The auxiliary engine loads by mode used in this study are presented in Table 8.

Table 8: Auxiliary engine loads, by ship class and mode.

| Ship Class            | Capacity Bin  | Auxiliary Engine Load (kW) |              |             |        |
|-----------------------|---------------|----------------------------|--------------|-------------|--------|
|                       |               | At-Berth                   | At-Anchorage | Maneuvering | At-Sea |
| Bulk carrier          | 0-9999        | 280                        | 190          | 310         | 190    |
|                       | 10000-34999   | 280                        | 190          | 310         | 190    |
|                       | 35000-59999   | 370                        | 260          | 420         | 260    |
|                       | 60000-99999   | 600                        | 420          | 680         | 420    |
|                       | 100000-199999 | 600                        | 420          | 680         | 420    |
|                       | 200000+       | 600                        | 420          | 680         | 420    |
| Chemical tanker       | 0-4999        | 160                        | 80           | 110         | 80     |
|                       | 5000-9999     | 490                        | 230          | 330         | 230    |
|                       | 10000-19999   | 490                        | 230          | 330         | 230    |
|                       | 20000+        | 1170                       | 550          | 780         | 550    |
| Container             | 0-999         | 340                        | 300          | 550         | 300    |
|                       | 1000-1999     | 600                        | 820          | 1320        | 820    |
|                       | 2000-2999     | 700                        | 1230         | 1800        | 1230   |
|                       | 3000-4999     | 940                        | 1390         | 2470        | 1390   |
|                       | 5000-7999     | 970                        | 1420         | 2600        | 1420   |
|                       | 8000-11999    | 1000                       | 1630         | 2780        | 1630   |
|                       | 12000-14500   | 1200                       | 1960         | 3330        | 1960   |
|                       | 14500+        | 1320                       | 2160         | 3670        | 2160   |
| General cargo         | 0-4999        | 120                        | 60           | 90          | 60     |
|                       | 5000-9999     | 330                        | 170          | 250         | 170    |
|                       | 10000+        | 970                        | 490          | 730         | 490    |
| Liquefied gas tanker  | 0-49999       | 240                        | 240          | 360         | 240    |
|                       | 50000-199999  | 1710                       | 1710         | 2565        | 1710   |
| Liquefied gas tanker  | 200000+       | 1710                       | 1710         | 2565        | 1710   |
| Oil tanker            | 0-4999        | 250                        | 250          | 375         | 250    |
|                       | 5000-9999     | 375                        | 375          | 563         | 375    |
|                       | 10000-19999   | 625                        | 625          | 938         | 625    |
|                       | 20000-59999   | 750                        | 750          | 1125        | 750    |
|                       | 60000-79999   | 750                        | 750          | 1125        | 750    |
|                       | 80000-119999  | 1000                       | 1000         | 1500        | 1000   |
|                       | 120000-199999 | 1250                       | 1250         | 1875        | 1250   |
|                       | 200000+       | 1500                       | 1500         | 2250        | 1500   |
| Other liquids tankers | 0+            | 500                        | 500          | 750         | 500    |
| Ferry-pax only        | 0-1999        | 186                        | 186          | 186         | 186    |
|                       | 2000+         | 524                        | 524          | 524         | 524    |
| Cruise                | 0-1999        | 450                        | 450          | 580         | 450    |
|                       | 2000-9999     | 450                        | 450          | 580         | 450    |
|                       | 10000-59999   | 3500                       | 3500         | 5460        | 3500   |
|                       | 60000-99999   | 11480                      | 11480        | 14900       | 11480  |
|                       | 100000+       | 11480                      | 11480        | 14900       | 11480  |
| Ferry-RoPax           | 0-1999        | 105                        | 105          | 105         | 105    |

| Ship Class              | Capacity Bin | Auxiliary Engine Load (kW) |              |             |        |
|-------------------------|--------------|----------------------------|--------------|-------------|--------|
|                         |              | At-Berth                   | At-Anchorage | Maneuvering | At-Sea |
| Refrigerated bulk       | 2000+        | 710                        | 710          | 710         | 710    |
|                         | 0-1999       | 1080                       | 1170         | 1150        | 1170   |
| Ro-Ro                   | 0-4999       | 800                        | 600          | 1700        | 600    |
|                         | 5000+        | 1200                       | 950          | 2720        | 950    |
| Vehicle                 | 0+           | 800                        | 500          | 1125        | 500    |
|                         | 4000+        | 800                        | 500          | 1125        | 500    |
| Yacht                   | 0+           | 130                        | 130          | 130         | 130    |
| Service - tug           | 0+           | 50                         | 50           | 50          | 50     |
| Miscellaneous - fishing | 0+           | 200                        | 200          | 200         | 200    |
| Offshore                | 0+           | 320                        | 320          | 320         | 320    |
| Service - other         | 0+           | 220                        | 220          | 220         | 220    |
| Miscellaneous - other   | 0+           | 190                        | 190          | 190         | 190    |

Similar to auxiliary engine loads, there is no commercial data source that provides information regarding auxiliary boiler loads by operational mode. Auxiliary boiler loads were developed using VBP data and based on professional judgment of the members of the consortium. Auxiliary boiler loads are typically reported in tons of fuel per day, but these rates have been converted to kW (Starcrest 2013). Boilers are used for various purposes on ships and their operational profile can change by mode. The following auxiliary boiler profiles were used for this study:

- The study assumes that at-sea operational mode, ships are meeting their steam requirements through economizers which scavenge heat from the main engine exhaust and use that heat to produce steam. There are exceptions to this assumption, with regards to tankers. We assumed, to be conservatively high, that boilers would be needed on oil tankers during at-sea operations to heat their cargo for the larger ship capacity bins (greater than 20000 dwt).
- Assumed that liquefied gas carriers would have additional steam requirements during at-sea operations.
- The study assumes that oil tankers and liquefied gas tankers will use steam plants to drive the cargo discharge pumps while at berth.
- Assumes that ferry-pax only, ferry-RoPax, and the non-cargo ships don't have boiler loads, consistent with the IMO GHG Study 2009.

The auxiliary boiler loads by mode used in this study are presented in Table 9.

**Table 9: Auxiliary boiler loads, by ship class and mode.**

| Ship Class            | Capacity Bin  | Auxiliary Boiler Load (kW) |              |             |        |
|-----------------------|---------------|----------------------------|--------------|-------------|--------|
|                       |               | At-Berth                   | At-Anchorage | Maneuvering | At-Sea |
| Bulk carrier          | 0-9999        | 280                        | 190          | 310         | 190    |
|                       | 10000-34999   | 280                        | 190          | 310         | 190    |
|                       | 35000-59999   | 370                        | 260          | 420         | 260    |
|                       | 60000-99999   | 600                        | 420          | 680         | 420    |
|                       | 100000-199999 | 600                        | 420          | 680         | 420    |
|                       | 200000+       | 600                        | 420          | 680         | 420    |
| Chemical tanker       | 0-4999        | 160                        | 80           | 110         | 80     |
|                       | 5000-9999     | 490                        | 230          | 330         | 230    |
|                       | 10000-19999   | 490                        | 230          | 330         | 230    |
|                       | 20000+        | 1170                       | 550          | 780         | 550    |
| Container             | 0-999         | 340                        | 300          | 550         | 300    |
|                       | 1000-1999     | 600                        | 820          | 1320        | 820    |
|                       | 2000-2999     | 700                        | 1230         | 1800        | 1230   |
|                       | 3000-4999     | 940                        | 1390         | 2470        | 1390   |
|                       | 5000-7999     | 970                        | 1420         | 2600        | 1420   |
|                       | 8000-11999    | 1000                       | 1630         | 2780        | 1630   |
|                       | 12000-14500   | 1200                       | 1960         | 3330        | 1960   |
|                       | 14500+        | 1320                       | 2160         | 3670        | 2160   |
| General cargo         | 0-4999        | 120                        | 60           | 90          | 60     |
|                       | 5000-9999     | 330                        | 170          | 250         | 170    |
|                       | 10000+        | 970                        | 490          | 730         | 490    |
| Liquefied gas tanker  | 0-49999       | 240                        | 240          | 360         | 240    |
|                       | 50000-199999  | 1710                       | 1710         | 2565        | 1710   |
| Liquefied gas tanker  | 200000+       | 1710                       | 1710         | 2565        | 1710   |
| Oil tanker            | 0-4999        | 250                        | 250          | 375         | 250    |
|                       | 5000-9999     | 375                        | 375          | 563         | 375    |
|                       | 10000-19999   | 625                        | 625          | 938         | 625    |
|                       | 20000-59999   | 750                        | 750          | 1125        | 750    |
|                       | 60000-79999   | 750                        | 750          | 1125        | 750    |
|                       | 80000-119999  | 1000                       | 1000         | 1500        | 1000   |
|                       | 120000-199999 | 1250                       | 1250         | 1875        | 1250   |
|                       | 200000+       | 1500                       | 1500         | 2250        | 1500   |
| Other liquids tankers | 0+            | 500                        | 500          | 750         | 500    |
| Ferry-pax only        | 0-1999        | 186                        | 186          | 186         | 186    |
|                       | 2000+         | 524                        | 524          | 524         | 524    |
| Cruise                | 0-1999        | 450                        | 450          | 580         | 450    |
|                       | 2000-9999     | 450                        | 450          | 580         | 450    |
|                       | 10000-59999   | 3500                       | 3500         | 5460        | 3500   |
|                       | 60000-99999   | 11480                      | 11480        | 14900       | 11480  |
|                       | 100000+       | 11480                      | 11480        | 14900       | 11480  |
| Ferry-RoPax           | 0-1999        | 105                        | 105          | 105         | 105    |

| Ship Class              | Capacity Bin | Auxiliary Boiler Load (kW) |              |             |        |
|-------------------------|--------------|----------------------------|--------------|-------------|--------|
|                         |              | At-Berth                   | At-Anchorage | Maneuvering | At-Sea |
| Refrigerated bulk       | 2000+        | 710                        | 710          | 710         | 710    |
|                         | 0-1999       | 1080                       | 1170         | 1150        | 1170   |
| Ro-Ro                   | 0-4999       | 800                        | 600          | 1700        | 600    |
|                         | 5000+        | 1200                       | 950          | 2720        | 950    |
| Vehicle                 | 0+           | 800                        | 500          | 1125        | 500    |
|                         | 4000+        | 800                        | 500          | 1125        | 500    |
| Yacht                   | 0+           | 130                        | 130          | 130         | 130    |
| Service - tug           | 0+           | 50                         | 50           | 50          | 50     |
| Miscellaneous - fishing | 0+           | 200                        | 200          | 200         | 200    |
| Offshore                | 0+           | 320                        | 320          | 320         | 320    |
| Service - other         | 0+           | 220                        | 220          | 220         | 220    |
| Miscellaneous - other   | 0+           | 190                        | 190          | 190         | 190    |

### Assumptions for main and auxiliary fuel type

The approach to defining the type of fuel used employs a definition according to the area that the ship is operating in:

1. Outside Emission Control Areas (ECAs): HFO/MDO/MGO average annual sulphur content will be based on the IMO sulphur monitoring program findings for fuel oils 2007 through 2012.
2. Inside ECAs: A sulphur content corresponding to the sulphur limit required in the ECA will be assumed in both main engines and auxiliary engines and boilers.

The iterative process which is used to allocate a specific fuel type (HFO, MDO or LNG) to a specific ship type and size category, is described in greater detail in Section 1.4.

### Assumptions for hull fouling and deterioration over time

The hull condition can have a considerable impact on the power requirements of a ship due to fouling which works to increase the hull's frictional resistance. At low Froude number (low speeds or long ship lengths), the frictional resistance is the largest component of drag and so increases in hull roughness have a larger effect relative to other components of resistance. Deterioration, which could include engine wear, changes to plating and propulsor over time are considered small relative to the effects of hull fouling and so are not included explicitly in the calculations at this point, but are the subject of ongoing research which may update the bottom-up model and its results in due course.

Due to the number of factors involved in quantifying hull surface properties, there is a large degree of uncertainty surrounding the values that should be used for the amplitude of initial hull roughness and the subsequent increase per year. Fouling depends on ship type, speed, trading pattern and distances travelled, fouling patterns, dry-dock interval, the ports visited and their cleaning/fouling class, sea temperatures, polishing (wear off) rate of anti-fouling paint, thickness of anti-fouling paint and type of anti-fouling paint.

To ensure an initial inclusion of the impact of fouling on fuel consumption in this study, initial amplitude of hull surface roughness of 150 $\mu$ m is assumed. A model by Doulgeris, Korakianitis et al. (2012) assumes clean hull roughness amplitude of 120 $\mu$ m, a model by Carlton assumes a value of 130 $\mu$ m. Carlton (2007) provides quantifications for change in roughness over time for different coatings. This work compares well with Doulgeris, Korakianitis et al. (2012) who assumed an increase in annual average hull roughness amplitude of 30 $\mu$ m from initial amplitude of 120 $\mu$ m, which led to an annual hull resistance increase of 2%.



On the assumption that maintenance takes place every 5 years (IMO Update Study) to restore initial hull roughness, an average increase in total resistance of 9% (constant in time) is applied for all ships. However, there is considerable uncertainty in this assumption. Many ships may dock and repaint with higher frequency than 5 years, may use a higher performance coating or may undertake cleaning/scrubbing in the interim between dry docking, all of which would reduce the average increase in total resistance.

### **Assumptions for the impact of weather on fuel consumption**

The weather impact parameter aims to quantify the added resistance in waves and the wind resistance and to therefore determine the extra load on the propeller and the additional power requirements from the engine in realistic operating conditions. In ship design it is common practice to include a sea margin (typically of between 10%-30%) based on experience of the power requirements for maintaining the speed of similar ships operating on similar routes. The actual figure depends on ship type, hull geometry, sea keeping characteristics and environmental conditions. However, this represents the upper-bound of the power required to overcome wind and waves as the ship will only be sailing in conditions where the full margin is required for some of its operating time. To estimate the impact of weather on the CO<sub>2</sub> emissions of shipping, added resistance is estimated for the range of environmental conditions that are encountered over the period of operation (one year).

Methods for estimating added resistance fall into four categories; approximate, theoretical (i.e. strip theories from the ships motion in calm water plus superposition theory and a known wave energy spectrum), model experimental and computer aided numerical approaches. However, the accuracy of the method used needs to be traded off against the availability of data describing the wind and wave environment that the ship has experienced over the period of operation. Whilst it is theoretically possible to match the routing data in AIS with historical meteorological data to produce an estimate of weather impacts experienced on a ship-by-ship, voyage-by-voyage basis, the level of detail for input to the calculation and the computational resources required to apply this to the world fleet over the course of a year is not feasible within this project.

Consequently, the approach taken here is to apply findings from other more detailed studies. Work by Prpic-Orsic and Faltinsen (2012) undertook a detailed modelling of the effect of weather on fuel consumption for an S-175 container ship in the North Atlantic using state of the art models for ship added resistance. Their calculations revealed that this ship type had, on average over the voyages, a 15% increment in fuel consumption over the calm water fuel consumption.

Whilst simplistic, this same assumption is applied as a starting assumption for the average increase in resistance for all ocean-going ship types (as classified according to the IMO GHG Study 2009) in this study. A lower value of 10% is applied as the added resistance of coastal shipping as it is expected that they would experience, on average, less extreme environmental conditions.

### **Activity and fleet data merger**

The activity and ship technical data merger is conducted using scripts that match the activity file's IMO or MMSI numbers with the corresponding ship in the appropriate annual IHSF file. Due to constraints imposed by the consortium member's pre-existing licensing agreements for both activity and ship technical data, during the merger process the ship identification fields (IMO and MMSI) are removed to make the merged file anonymous at the ship level. A unique reference number is generated for each observed ship along with a merged activity and ship technical data file structure for each year. If a ship is observed in the activity data, but not matched to the IHSF dataset, the ship's activity data is returned unchanged. The ship status field is utilized for both observed and unobserved ships in the cargo carrying ship type. The process is illustrated in Figure 9.

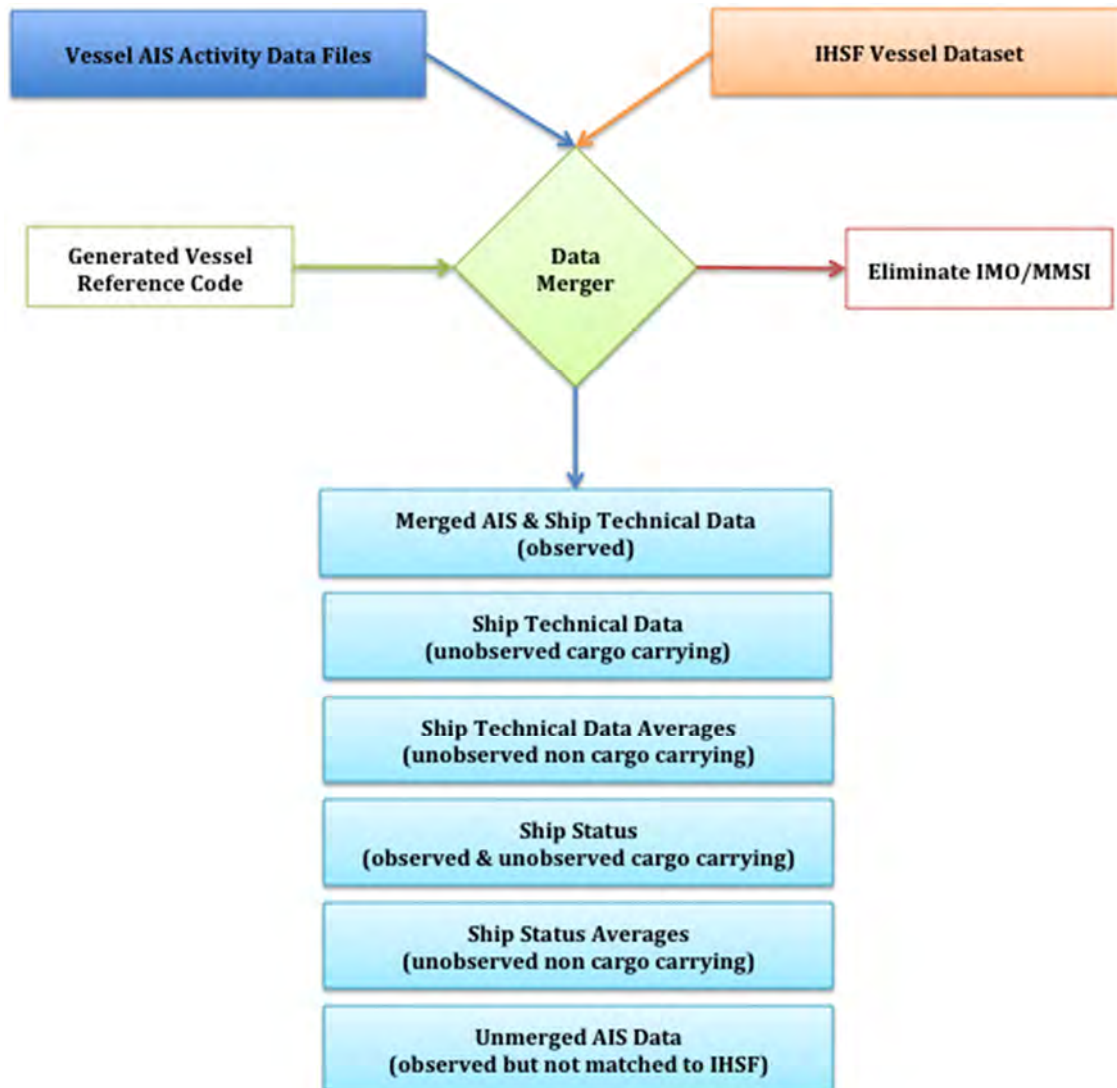


Figure 9: Activity and ship technical and operational data merger process.

For unobserved cargo carrying ship type ships, technical data is generated such that emissions can be estimated based on activity data surrogates from the same subclass and capacity bin. For the other ship types, ship class average values are used for estimating emissions and gap filling is conducted on a ship class basis.

It should be noted that due to license terms (both from the providers of technical data and AIS data), the data outputs depicted in Figure 9 are only available to the consortium members and only during the duration of the study. At the end of the study, they will be destroyed.

### Bottom-up model calculation procedure

The bottom-up method combines both activity data (derived from AIS and LRIT raw data sources), and technical data (derived from IHSF and a series of empirical and literature derived assumptions).

The model has been written in the programming language Matlab in order to take advantage of the data handling, statistical and modelling functionality and run-time management offered by this commercial software. The model is composed of a main programme (*Run*) which calls a number of subroutines as listed in Table 10. Each ship has a maximum of 8760 different

activity observations per year, and with approximately 60000 ships included in a given year's fleet, the run-time of the model is significant on conventional hardware (hours).

The model can only perform calculations for ships for which there are both activity and IHSF technical data available, these are referred to as "matched ships". Procedures for estimating the fuel demands and emissions of ships that are not matched are described in the section on fleet estimation.

**Table 10: Description of bottom-up model subroutines and calculation stages.**

| Subroutine             | Description   |
|------------------------|---|
| <i>Read_fleet</i>      | Reads in and formats data from the database structure containing ship technical characteristics   |
| <i>Read_status</i>     | Reads in and formats data from the database structure containing ship quarterly status definition   |
| <i>Emissions_in</i>    | Reads in the emissions factor data for all engine types, fuel types and emissions species   |
| <i>Type_size_match</i> | Reads in additional assumptions characterizing aggregate ship type and size fleets  |
| <i>EF_match</i>        | For each matched ship, looks-up the machinery specification to identify the appropriate emissions factors from <i>Emissions_in</i>  |
| <i>Active_calcs</i>    | For each matched ship, uses the data describing hourly observations of a ship's activity in a series of sub-routines to estimate hourly power demands, fuel consumption and emissions |
| <i>Power_at_op</i>     | Calculates the power demanded from main, auxiliary and boiler for each hour of observed and extrapolated activity   |
| <i>Emissions_at_op</i> | Calculates the fuel consumed and emissions (9 species) for each hour of observed and extrapolated activity  |
| <i>Assemble</i>        | Calculates a series of annual and quarterly statistics to characterize activity, power, fuel use and emissions for each matched ship  |
| <i>Output</i>          | Structures and writes the databases produced in <i>assemble</i> for producing aggregate statistics, performing QA/QC, and undertaking uncertainty analysis                            |

Algorithms for reading in and formatting input databases do not manipulate the data and therefore are not described in greater detail here. However, there are a number of subroutines that perform operations on the activity data, technical data or both and for transparency, the method used in those steps is described in greater detail below.

#### **Powering subroutine: Power\_at\_op**

This subroutine estimates the main, auxiliary and boiler power output in a given hour of operation. The main engine's power output is dominated by the propulsion requirements of the ship, which in turn is dominated by the operation (speed, draught) and condition (hull condition, environmental conditions). The auxiliary and boiler power demands are a function of service loads (including cargo operations), and vary depending on the cargo carried, the operation of the main machinery and the mode of operation (e.g. whether the ship is at berth, at anchor, at sea etc.).

#### **Key assumptions**

Some ships have shaft generators, which produce electrical power for auxiliary systems from the propeller shaft. This represents main engine power output that would be additional to the propulsion power demand and would be expected to reduce the power output of the auxiliary machinery. There is no data in the IHSF database that could be used to reliably determine whether a ship is equipped with a shaft generator, and so an assumption was applied that for all ships, only the main engine produces propulsion power and only auxiliary engines

produce service power. This assumption should not significantly impact the total power produced, but because main engines / shaft generators and auxiliary engines have different specific fuel consumptions and emissions factors, there will be an effect on these calculations which is discussed in greater detail in Section 1.5 and 2.5.

A number of ships recover energy from waste heat (either exhaust, jacket waste heat or cooling water waste heat). This recovered energy can be used to provide both propulsion and service power supply, which reduces the power demands on the main engine, auxiliary engines and boiler to produce a given level of performance / service. The assumption applied for these calculations is that the majority of these reductions occur in the auxiliary and boiler systems, and that any reductions in their power demands are already factored into the empirically derived power outputs. For the small number of ships that use waste heat recovered energy for propulsion, this will be misrepresented by the model as written. The consequence can be observed in the discussion on quality of the bottom-up model in Section 1.4.

### **Main engine power output**

In steady state (constant speed), the thrust produced by the engine and propeller is in equilibrium with forces opposing the ship's motion. These forces include both hydrodynamic and aerodynamic resistance. Both forces are modified by the weather e.g. sailing into headwinds or headseas (waves) increases resistance. In both calm and rough weather, total resistance is dominated by hydrodynamic resistance, which in turn is dominated by viscous (friction) and wavemaking resistance.

Naval architects have progressed methods for estimating resistance from ship characteristics for a ship in ideal conditions (negligible wind and waves, clean hull), which reveal that in these conditions, resistance is strongly related to the speed of the hull through the water. However, in operation, a hull rarely stays 'clean' and the surface properties are modified over time as coatings deteriorate, macro and micro fouling grows on the hull and as the plating deforms through wear and tear. This modification of surface properties can have a significant impact on the viscous resistance and needs to be taken into account in any calculation of operational fuel consumption.

Further influences to a ship's resistance and propulsion are its draught and trim, which are in turn determined by the ship's loading condition (the amount and distribution of cargo and variable loads). A greater draught will increase the wetted surface area of the hull and typically increase the resistance (although both bulbous bow and propeller performance can sometimes counteract this trend of increased power demand with increasing draught). The approximation used in this model is to represent the effect of draught through the use of the Admiralty formula, which assumes that power is related to displacement to the power 0.66.

The formulated equation to encapsulate all of these effects on resistance and therefore main engine power is given in (1).

$$P_t = \frac{P_{ref} \left( \frac{t_t}{t_{ref}} \right)^{\left( \frac{2}{3} \right)} \left( \frac{V_t}{V_{ref}} \right)^n}{\eta_w \eta_f} \quad (1)$$

where  $P_t$ ,  $V_t$  and  $t_t$  are respectively the instantaneous power, speed and draught at time  $t$ ,  $P_{ref}$  is the reference power at speed  $V_{ref}$  and draught  $t_{ref}$  (both taken from IHSF).  $n$  is an index that represents the relationship between speed and power, and  $\eta_w$  is the modification of propulsion efficiency due to weather and  $\eta_f$  is the modification of propulsion efficiency due to fouling (discussed above). For the bottom-up model, the same assumptions that are used in the 2009 IMO GHG Study have been used. That is that  $n=3$ , an assumption discussed in greater detail in Section 1.5, and evaluated with respect to quality in Section 1.4.

### Aux engine and boiler power demands

The power outputs required by both the auxiliary engine and the boiler are both found using look-ups from input tables described above in the section “Assumptions for auxiliary and boiler power demands”. The corresponding mode is calculated for each ship and each hour of operation, from its instantaneous observed speed.

### Emissions subroutine: Emissions\_at\_op

The emissions produced by machinery are a function of the amount of fuel consumed and the specifics of that fuel’s combustion. The former (fuel consumed) is found from the power, SFOC and time, and the latter is found from the use of an emission factor – in the case of CO<sub>2</sub>, a carbon factor. The calculation of SFOC and emissions factors is detailed in Section 2 and Annex 6. Given this information, the formulation for this model’s calculation of emissions of main, auxiliary and boiler machinery is given in 2.

$$CO_2 = P_t \cdot sfc \cdot C_f \cdot t \quad (2)$$

where  $P_t$  is the instantaneous power output at time  $t$  (obtained from *power\_at\_op*),  $sfc$  is the specific fuel consumption (for a given engine with a given fuel at a given load factor),  $C_f$  is the carbon factor (for a given fuel), and  $t$  is the length of time the instantaneous power was observed to be constant. The values of  $C_f$  specific to different fuels are reported in Section 2.2 along with the other emissions species.

The  $sfc$  is found from the combination of a default assumption for a given engine type, size and age,  $sfc_e$  and a modifying factor obtained from a look-up table to account for variations in  $sfc$  as a function of fuel type and engine load factor.

$$sfc = sfc_e \cdot f_e \quad (3)$$

The assumptions for  $sfc_e$  are described in detail in Section 2 and the associated annex Annex 6.  $f_e$  is estimated from manufacturer’s data, as described in Section 2.

### Aggregation by ship type and size

As discussed in Section 1.2, the activity and fleet data merger matches the IHSF fleet data to the AIS data, determining whether there is a match by ship and whether the activity data is of good or poor quality. Good quality activity data is currently defined as having day coverage of 10% or greater, although this assumption will be tested for its impact on quality and uncertainty in Section 1.4 and 1.5. The matched data is filtered for good quality, creating a per ship profile. The values in the per-ship profile are averaged across ship type and size bins to create an aggregate ship type profile.

### Fleet estimate assembly

Further estimation is required for both the unmatched ships within a ship type and size category. The aggregate average ship type and size profile is used to estimate the speed and draught profile, and this is then deployed with the ship’s technical specification to calculate fuel use and emissions. This assumes that the mean speed and draught for the ship type and size bin is representative of all ships within that type and size bin. Once this step is completed, the per-ship profile is merged with the backfilled ships and the same aggregation by ship type and size bin category is performed, this time with the complete fleet of in-service ships. The effect of the uncertainty in the operational profile of the unmatched ships on the total inventory emissions is considered further in the uncertainty analysis.

## **Annex 2 (details for Section 1.3, inventory results)**

The following tables detail the data characterizing the activity, energy demand and emissions specifics of each of the ship type and size fleets within the shipping industry analysed using the bottom-up method, for each of the years of the study (2007-2012). The tables represent the equivalent to the data in Table 13 in the main report, which lists the same fields for 2012.

## 2011 Detailed Results

| Ship type             | Size category | Units | Number active |      | Decimal AIS Coverage of in-service ships | Avg. deadweight (tonnes) | Avg. installed power (kW) | Avg. design speed (knots) | Avg. days at sea | Avg.* sea speed (knots) | Avg.* consumption ('000 tonnes) |           |        | Total carbon emissions ('000 tonnes) |
|-----------------------|---------------|-------|---------------|------|--|--------------------------|---------------------------|---------------------------|------------------|-------------------------|---------------------------------|-----------|--------|--------------------------------------|
|                       |               |       | IHSF          | AIS  |  |                          |                           |                           |                  |                         | main                            | auxiliary | Boiler |                                      |
| Bulk carrier          | 0-9999        | dwt   | 1283          | 605  | 0.47                                     | 5194                     | 1843                      | 11.6                      | 177              | 9.7                     | 1.2                             | 0.5       | 0.1    | 7077                                 |
|                       | 10000-        | dwt   | 2328          | 2004 | 0.86                                     | 27366                    | 6637                      | 14.5                      | 178              | 11.6                    | 3.6                             | 0.5       | 0.1    | 29371                                |
|                       | 35000-        | dwt   | 2650          | 2423 | 0.91                                     | 51195                    | 8922                      | 14.9                      | 187              | 12.2                    | 5.1                             | 0.7       | 0.1    | 47873                                |
|                       | 60000-        | dwt   | 1951          | 1823 | 0.93                                     | 76913                    | 10384                     | 14.7                      | 194              | 12.3                    | 6.3                             | 1.1       | 0.3    | 45596                                |
|                       | 100000-       | dwt   | 1084          | 1006 | 0.93                                     | 167167                   | 16402                     | 15.1                      | 203              | 12.2                    | 9.6                             | 1.1       | 0.2    | 35873                                |
|                       | 200000+       | dwt   | 206           | 196  | 0.95                                     | 244150                   | 19877                     | 14.6                      | 204              | 12.4                    | 12.2                            | 1.1       | 0.2    | 8738                                 |
| Chemical tanker       | 0-4999        | dwt   | 1594          | 823  | 0.52                                     | 3937                     | 1773                      | 12.0                      | 163              | 9.9                     | 1.0                             | 0.2       | 0.2    | 6955                                 |
|                       | 5000-9999     | dwt   | 884           | 778  | 0.88                                     | 8931                     | 3707                      | 13.5                      | 170              | 10.8                    | 1.9                             | 0.6       | 0.4    | 7819                                 |
|                       | 10000-        | dwt   | 1033          | 954  | 0.92                                     | 17884                    | 5833                      | 14.3                      | 188              | 12.0                    | 3.6                             | 0.6       | 0.3    | 14520                                |
|                       | 20000+        | dwt   | 1410          | 1275 | 0.90                                     | 42782                    | 9398                      | 15.0                      | 182              | 12.6                    | 5.2                             | 1.4       | 0.4    | 29961                                |
| Container             | 0-999         | TEU   | 1154          | 945  | 0.82                                     | 9676                     | 5912                      | 16.2                      | 197              | 12.6                    | 3.0                             | 2.4       | 0.6    | 14772                                |
|                       | 1000-1999     | TEU   | 1277          | 1172 | 0.92                                     | 20723                    | 12443                     | 19.3                      | 206              | 14.4                    | 5.8                             | 2.2       | 0.4    | 32935                                |
|                       | 2000-2999     | TEU   | 724           | 666  | 0.92                                     | 35764                    | 21668                     | 21.6                      | 222              | 16.0                    | 10.3                            | 3.0       | 0.4    | 30695                                |
|                       | 3000-4999     | TEU   | 944           | 864  | 0.92                                     | 53951                    | 35980                     | 23.8                      | 241              | 16.9                    | 16.3                            | 3.8       | 0.5    | 59865                                |
|                       | 5000-7999     | TEU   | 576           | 545  | 0.95                                     | 76981                    | 55592                     | 25.2                      | 246              | 17.2                    | 23.0                            | 4.0       | 0.6    | 49192                                |
|                       | 8000-11999    | TEU   | 260           | 236  | 0.91                                     | 108236                   | 68779                     | 25.4                      | 250              | 17.4                    | 28.9                            | 4.3       | 0.6    | 27195                                |
|                       | 12000-        | TEU   | 50            | 47   | 0.94                                     | 164333                   | 77563                     | 27.1                      | 240              | 16.9                    | 30.9                            | 5.2       | 0.8    | 5291                                 |
|                       | 14500+        | TEU   | -             | -    | -  | -                        | -                         | -                         | -                | -                       | -                               | -         | -      | -                                    |
| General cargo         | 0-4999        | dwt   | 12187         | 4760 | 0.39                                     | 2405                     | 1180                      | 11.2                      | 167              | 8.8                     | 0.6                             | 0.1       | 0.0    | 28339                                |
|                       | 5000-9999     | dwt   | 2936          | 2268 | 0.77                                     | 8441                     | 3405                      | 13.5                      | 178              | 10.3                    | 1.7                             | 0.4       | 0.1    | 19682                                |
|                       | 10000+        | dwt   | 2108          | 1776 | 0.84                                     | 22011                    | 7171                      | 15.4                      | 181              | 12.1                    | 3.7                             | 1.3       | 0.1    | 32360                                |
| Liquefied gas tanker  | 0-49999       | cbm   | 1088          | 833  | 0.77                                     | 7240                     | 3870                      | 13.9                      | 186              | 12.0                    | 2.7                             | 0.6       | 0.4    | 12206                                |
|                       | 50000-        | cbm   | 448           | 416  | 0.93                                     | 68019                    | 22327                     | 18.5                      | 262              | 15.1                    | 19.1                            | 4.0       | 0.5    | 29658                                |
|                       | 200000+       | cbm   | 45            | 38   | 0.84                                     | 121270                   | 37358                     | 19.3                      | 297              | 16.6                    | 34.4                            | 3.9       | 1.0    | 5504                                 |
| Oil tanker            | 0-4999        | dwt   | 3761          | 1419 | 0.38                                     | 2781                     | 1415                      | 11.2                      | 145              | 8.9                     | 0.8                             | 0.6       | 0.2    | 19110                                |
|                       | 5000-9999     | dwt   | 681           | 529  | 0.78                                     | 9005                     | 3134                      | 12.7                      | 155              | 9.3                     | 1.3                             | 1.0       | 0.3    | 5331                                 |
|                       | 10000-        | dwt   | 215           | 172  | 0.80                                     | 20338                    | 5169                      | 13.5                      | 159              | 9.8                     | 2.0                             | 1.6       | 0.4    | 2602                                 |
|                       | 20000-        | dwt   | 681           | 623  | 0.91                                     | 43467                    | 8570                      | 14.9                      | 169              | 11.9                    | 4.1                             | 2.0       | 0.6    | 13819                                |
|                       | 60000-        | dwt   | 397           | 356  | 0.90                                     | 72401                    | 12091                     | 15.3                      | 177              | 12.4                    | 5.9                             | 1.9       | 0.6    | 10118                                |
|                       | 80000-        | dwt   | 878           | 795  | 0.91                                     | 106477                   | 13518                     | 15.0                      | 180              | 11.9                    | 6.2                             | 2.6       | 0.8    | 25786                                |
|                       | 120000-       | dwt   | 417           | 380  | 0.91                                     | 154878                   | 17849                     | 15.1                      | 206              | 12.2                    | 9.2                             | 3.1       | 1.0    | 17114                                |
|                       | 200000+       | dwt   | 563           | 534  | 0.95                                     | 304656                   | 26710                     | 16.0                      | 222              | 12.9                    | 15.8                            | 3.7       | 1.1    | 35284                                |
| Other liquids tankers | 0+            | dwt   | 152           | 28   | 0.18                                     | 740                      | 594                       | 9.8                       | 103              | 8.8                     | 0.4                             | 1.3       | 0.4    | 1046                                 |

| Ship type               | Size category | Units   | Number active |      | Decimal AIS Coverage of in-service ships | Avg. deadweight (tonnes) | Avg. installed power (kW) | Avg. design speed (knots) | Avg. days at sea | Avg.* sea speed (knots) | Avg.* consumption ('000 tonnes) |           |        | Total carbon emissions ('000 tonnes) |
|-------------------------|---------------|---------|---------------|------|--|--------------------------|---------------------------|---------------------------|------------------|-------------------------|---------------------------------|-----------|--------|--------------------------------------|
|                         |               |         | IHSF          | AIS  |  |                          |                           |                           |                  |                         | main                            | auxiliary | Boiler |                                      |
| Ferry-pax only          | 0-1999        | GT      | 3051          | 928  | 0.30                                     | 702                      | 1991                      | 22.6                      | 180              | 14.4                    | 0.9                             | 0.4       | 0.0    | 12299                                |
|                         | 2000-+        | GT      | 72            | 37   | 0.51                                     | 1730                     | 6785                      | 16.8                      | 219              | 13.8                    | 4.9                             | 1.0       | 0.0    | 1335                                 |
| Cruise                  | 0-1999        | GT      | 201           | 72   | 0.36                                     | 2306                     | 1219                      | 12.6                      | 119              | 8.8                     | 0.4                             | 1.0       | 0.5    | 1204                                 |
|                         | 2000-9999     | GT      | 72            | 54   | 0.75                                     | 4847                     | 4549                      | 15.6                      | 160              | 10.2                    | 1.5                             | 1.0       | 0.4    | 636                                  |
|                         | 10000-        | GT      | 116           | 99   | 0.85                                     | 4312                     | 19479                     | 19.7                      | 209              | 14.0                    | 9.9                             | 8.9       | 1.4    | 7131                                 |
|                         | 60000-        | GT      | 83            | 75   | 0.90                                     | 8369                     | 52920                     | 22.0                      | 261              | 15.8                    | 31.5                            | 25.8      | 0.6    | 14690                                |
|                         | 100000-+      | GT      | 46            | 44   | 0.96                                     | 12527                    | 72663                     | 22.1                      | 264              | 16.4                    | 47.1                            | 26.0      | 0.5    | 10365                                |
| Ferry-RoPax             | 0-1999        | GT      | 1617          | 574  | 0.35                                     | 896                      | 1530                      | 13.0                      | 177              | 8.6                     | 0.7                             | 0.2       | 0.0    | 4507                                 |
|                         | 2000-+        | GT      | 1216          | 917  | 0.75                                     | 3459                     | 15357                     | 21.4                      | 199              | 14.2                    | 6.4                             | 1.4       | 0.0    | 28789                                |
| Refrigerated            | 0-1999        | dwt     | 1126          | 802  | 0.71                                     | 5538                     | 4877                      | 16.0                      | 184              | 13.6                    | 3.4                             | 2.3       | 0.4    | 21212                                |
| Ro-Ro                   | 0-4999        | dwt     | 1323          | 461  | 0.35                                     | 1930                     | 1751                      | 10.9                      | 158              | 9.2                     | 1.2                             | 2.4       | 0.3    | 16469                                |
|                         | 5000-+        | dwt     | 443           | 391  | 0.88                                     | 11286                    | 11526                     | 17.8                      | 206              | 14.4                    | 7.2                             | 3.7       | 0.4    | 15349                                |
| Vehicle                 | 0-3999        | vehicle | 300           | 254  | 0.85                                     | 9683                     | 8714                      | 18.1                      | 228              | 14.4                    | 6.0                             | 1.6       | 0.3    | 7247                                 |
|                         | 4000-+        | vehicle | 500           | 474  | 0.95                                     | 19948                    | 13937                     | 19.8                      | 259              | 15.8                    | 9.2                             | 1.5       | 0.3    | 16913                                |
| Yacht                   | 0-+           | GT      | 1694          | 929  | 0.55                                     | 2424                     | 3137                      | 16.6                      | 82               | 11.2                    | 0.7                             | 0.2       | 0.0    | 5215                                 |
| Service - tug           | 0-+           | GT      | 14221         | 4204 | 0.30                                     | 1342                     | 2437                      | 11.9                      | 102              | 7.2                     | 0.6                             | 0.1       | 0.0    | 30601                                |
| Miscellaneous - fishing | 0-+           | GT      | 22428         | 2796 | 0.12                                     | 281                      | 945                       | 11.5                      | 175              | 7.7                     | 0.4                             | 0.4       | 0.0    | 57894                                |
| Offshore                | 0-+           | GT      | 6324          | 4511 | 0.71                                     | 3016                     | 4560                      | 13.9                      | 113              | 8.3                     | 0.9                             | 0.8       | 0.0    | 30078                                |
| Service - other         | 0-+           | GT      | 2863          | 2347 | 0.82                                     | 4735                     | 3782                      | 12.7                      | 122              | 8.0                     | 1.0                             | 0.4       | 0.0    | 12812                                |
| Miscellaneous - other   | 0-+           | GT      | 3301          | 55   | 0.02                                     | 339                      | 1994                      | 12.6                      | 127              | 8.9                     | 1.0                             | 0.4       | 0.0    | 14757                                |



## 2010 Detailed Results

| Ship type             | Size category | Units | Number active |      | Decimal AIS Coverage of in-service ships | Avg. deadweight (tonnes) | Avg. installed power (kW) | Avg. design speed (knots) | Avg. days at sea | Avg.* sea speed (knots) | Avg.* consumption ('000 tonnes) |           |        | Total carbon emissions ('000 tonnes) |
|-----------------------|---------------|-------|---------------|------|--|--------------------------|---------------------------|---------------------------|------------------|-------------------------|---------------------------------|-----------|--------|--------------------------------------|
|                       |               |       | IHSF          | AIS  |  |                          |                           |                           |                  |                         | main                            | auxiliary | Boiler |                                      |
| Bulk carrier          | 0-9999        | dwt   | 1276          | 637  | 0.50                                     | 3313                     | 1687                      | 12.1                      | 174              | 9.9                     | 1.1                             | 0.5       | 0.1    | 6171                                 |
|                       | 10000-34999   | dwt   | 2374          | 2122 | 0.89                                     | 28455                    | 7112                      | 15.8                      | 179              | 11.6                    | 3.4                             | 0.5       | 0.1    | 26464                                |
|                       | 35000-59999   | dwt   | 2487          | 2389 | 0.96                                     | 54546                    | 9548                      | 16.3                      | 188              | 12.2                    | 4.6                             | 0.7       | 0.1    | 38531                                |
|                       | 60000-99999   | dwt   | 1868          | 1833 | 0.98                                     | 81713                    | 10989                     | 15.7                      | 180              | 12.3                    | 5.4                             | 1.1       | 0.3    | 37696                                |
|                       | 100000-199999 | dwt   | 1008          | 994  | 0.99                                     | 198060                   | 18997                     | 17.4                      | 179              | 12.7                    | 8.1                             | 1.1       | 0.3    | 27299                                |
|                       | 200000+       | dwt   | 211           | 210  | 1.00                                     | 284595                   | 22740                     | 16.9                      | 177              | 12.8                    | 10.2                            | 1.1       | 0.3    | 7014                                 |
| Chemical tanker       | 0-4999        | dwt   | 1581          | 850  | 0.54                                     | 2153                     | 1392                      | 12.2                      | 163              | 9.9                     | 0.8                             | 0.2       | 0.2    | 5646                                 |
|                       | 5000-9999     | dwt   | 892           | 807  | 0.90                                     | 8082                     | 3573                      | 14.5                      | 170              | 11.0                    | 1.8                             | 0.5       | 0.4    | 6926                                 |
|                       | 10000-19999   | dwt   | 1018          | 967  | 0.95                                     | 16800                    | 5797                      | 15.6                      | 183              | 12.1                    | 3.3                             | 0.5       | 0.3    | 12094                                |
|                       | 20000+        | dwt   | 1446          | 1381 | 0.96                                     | 45789                    | 10035                     | 16.3                      | 179              | 12.7                    | 5.2                             | 1.3       | 0.3    | 28668                                |
| Container             | 0-999         | TEU   | 1211          | 1023 | 0.84                                     | 9080                     | 6182                      | 17.1                      | 191              | 12.7                    | 3.2                             | 0.8       | 0.2    | 14334                                |
|                       | 1000-1999     | TEU   | 1313          | 1264 | 0.96                                     | 21520                    | 13156                     | 20.2                      | 201              | 14.5                    | 5.8                             | 2.1       | 0.4    | 32336                                |
|                       | 2000-2999     | TEU   | 759           | 725  | 0.96                                     | 37478                    | 22640                     | 22.4                      | 214              | 16.2                    | 10.5                            | 3.0       | 0.4    | 31332                                |
|                       | 3000-4999     | TEU   | 949           | 922  | 0.97                                     | 58072                    | 39328                     | 25.8                      | 230              | 17.2                    | 16.0                            | 3.7       | 0.5    | 55792                                |
|                       | 5000-7999     | TEU   | 564           | 564  | 1.00                                     | 81168                    | 59115                     | 26.6                      | 228              | 17.5                    | 21.8                            | 4.0       | 0.6    | 44706                                |
|                       | 8000-11999    | TEU   | 242           | 241  | 1.00                                     | 119058                   | 76538                     | 28.3                      | 238              | 17.9                    | 27.6                            | 4.2       | 0.6    | 23008                                |
|                       | 12000-14500   | TEU   | 37            | 36   | 0.97                                     | 283558                   | 131829                    | 43.7                      | 241              | 17.0                    | 24.5                            | 4.2       | 0.6    | 2434                                 |
|                       | 14500+        | TEU   | 0             | 0    | 0.00                                     | 0                        | 0                         | 0.0                       | 0                | 0.0                     | -                               | -         | -      | 0                                    |
| General cargo         | 0-4999        | dwt   | 13021         | 5204 | 0.40                                     | 1913                     | 1107                      | 11.6                      | 161              | 8.8                     | 0.6                             | 0.1       | 0.0    | 26176                                |
|                       | 5000-9999     | dwt   | 3009          | 2381 | 0.79                                     | 7534                     | 3471                      | 14.2                      | 180              | 10.4                    | 1.7                             | 0.4       | 0.1    | 18893                                |
|                       | 10000+        | dwt   | 2225          | 1865 | 0.84                                     | 23156                    | 7910                      | 16.9                      | 172              | 12.2                    | 3.6                             | 1.2       | 0.1    | 30504                                |
| Liquefied gas tanker  | 0-49999       | cbm   | 1102          | 872  | 0.79                                     | 7081                     | 3908                      | 14.6                      | 181              | 11.9                    | 2.4                             | 0.6       | 0.4    | 10950                                |
|                       | 50000-199999  | cbm   | 464           | 449  | 0.97                                     | 72093                    | 23748                     | 19.7                      | 230              | 14.5                    | 15.0                            | 4.1       | 0.6    | 24433                                |
|                       | 200000+       | cbm   | 45            | 45   | 1.00                                     | 135581                   | 41767                     | 21.5                      | 251              | 15.5                    | 22.8                            | 4.0       | 1.1    | 3691                                 |
| Oil tanker            | 0-4999        | dwt   | 3910          | 1450 | 0.37                                     | 1933                     | 1236                      | 11.4                      | 140              | 9.0                     | 0.7                             | 0.6       | 0.2    | 16768                                |
|                       | 5000-9999     | dwt   | 666           | 520  | 0.78                                     | 7258                     | 3058                      | 13.7                      | 144              | 9.6                     | 1.2                             | 0.9       | 0.2    | 4228                                 |
|                       | 10000-19999   | dwt   | 227           | 175  | 0.77                                     | 16019                    | 4956                      | 14.2                      | 139              | 10.2                    | 2.0                             | 1.5       | 0.4    | 2355                                 |
|                       | 20000-59999   | dwt   | 744           | 679  | 0.91                                     | 46793                    | 9389                      | 16.3                      | 162              | 12.0                    | 3.9                             | 1.9       | 0.6    | 13516                                |
|                       | 60000-79999   | dwt   | 405           | 389  | 0.96                                     | 78219                    | 12831                     | 16.3                      | 172              | 12.5                    | 5.8                             | 1.9       | 0.6    | 9733                                 |
|                       | 80000-119999  | dwt   | 895           | 869  | 0.97                                     | 115036                   | 14483                     | 16.1                      | 178              | 12.3                    | 6.5                             | 2.5       | 0.8    | 25477                                |
|                       | 120000-199999 | dwt   | 423           | 410  | 0.97                                     | 169810                   | 19500                     | 16.5                      | 186              | 12.7                    | 9.1                             | 3.1       | 1.0    | 16199                                |
|                       | 200000+       | dwt   | 578           | 550  | 0.95                                     | 335961                   | 29110                     | 17.4                      | 187              | 13.3                    | 14.4                            | 3.7       | 1.2    | 31835                                |
| Other liquids tankers | 0+            | dwt   | 168           | 33   | 0.20                                     | 778                      | 614                       | 10.2                      | 50               | 7.2                     | 0.1                             | 1.1       | 0.4    | 831                                  |

| Ship type               | Size category | Units   | Number active |      | Decimal AIS Coverage of in-service ships | Avg. deadweight (tonnes) | Avg. installed power (kW) | Avg. design speed (knots) | Avg. days at sea | Avg.* sea speed (knots) | Avg.* consumption ('000 tonnes) |           |        | Total carbon emissions ('000 tonnes) |
|-------------------------|---------------|---------|---------------|------|--|--------------------------|---------------------------|---------------------------|------------------|-------------------------|---------------------------------|-----------|--------|--------------------------------------|
|                         |               |         | IHSF          | AIS  |  |                          |                           |                           |                  |                         | main                            | auxiliary | Boiler |                                      |
| Ferry-pax only          | 0-1999        | GT      | 3117          | 901  | 0.29                                     | 103                      | 1907                      | 23.2                      | 158              | 14.6                    | 0.7                             | 0.3       | 0.0    | 9973                                 |
|                         | 2000-+        | GT      | 75            | 42   | 0.56                                     | 1761                     | 6974                      | 17.6                      | 141              | 12.7                    | 3.4                             | 0.9       | 0.0    | 839                                  |
| Cruise                  | 0-1999        | GT      | 203           | 65   | 0.32                                     | 177                      | 987                       | 12.7                      | 88               | 8.3                     | 0.2                             | 0.9       | 0.5    | 968                                  |
|                         | 2000-9999     | GT      | 78            | 60   | 0.77                                     | 1169                     | 4557                      | 16.2                      | 174              | 10.8                    | 2.1                             | 1.0       | 0.4    | 823                                  |
|                         | 10000-59999   | GT      | 126           | 117  | 0.93                                     | 4616                     | 19902                     | 20.6                      | 212              | 14.3                    | 10.5                            | 8.7       | 1.3    | 7398                                 |
|                         | 60000-99999   | GT      | 83            | 81   | 0.98                                     | 8630                     | 54568                     | 22.7                      | 252              | 15.8                    | 31.6                            | 25.8      | 0.6    | 13919                                |
|                         | 100000-+      | GT      | 44            | 43   | 0.98                                     | 12200                    | 80601                     | 24.3                      | 268              | 16.9                    | 47.4                            | 24.4      | 0.5    | 9311                                 |
| Ferry-RoPax             | 0-1999        | GT      | 1670          | 592  | 0.35                                     | 400                      | 1552                      | 13.5                      | 170              | 9.0                     | 0.7                             | 0.2       | 0.0    | 4433                                 |
|                         | 2000-+        | GT      | 1286          | 1049 | 0.82                                     | 3242                     | 15658                     | 22.1                      | 188              | 14.8                    | 6.8                             | 1.3       | 0.0    | 29838                                |
| Refrigerated bulk       | 0-1999        | dwt     | 1226          | 874  | 0.71                                     | 5705                     | 5165                      | 16.7                      | 184              | 13.7                    | 3.6                             | 2.3       | 0.4    | 22414                                |
| Ro-Ro                   | 0-4999        | dwt     | 1319          | 469  | 0.36                                     | 1168                     | 1701                      | 11.5                      | 154              | 9.4                     | 1.3                             | 2.2       | 0.3    | 14591                                |
|                         | 5000-+        | dwt     | 488           | 450  | 0.92                                     | 12109                    | 12180                     | 18.9                      | 190              | 14.4                    | 6.7                             | 3.5       | 0.4    | 14501                                |
| Vehicle                 | 0-3999        | vehicle | 328           | 283  | 0.86                                     | 10459                    | 9705                      | 20.3                      | 218              | 14.6                    | 6.0                             | 1.4       | 0.3    | 6808                                 |
|                         | 4000-+        | vehicle | 527           | 493  | 0.94                                     | 21335                    | 15369                     | 22.1                      | 244              | 16.1                    | 9.1                             | 1.4       | 0.3    | 15946                                |
| Yacht                   | 0-+           | GT      | 1568          | 896  | 0.57                                     | 146                      | 2942                      | 17.4                      | 71               | 11.1                    | 0.4                             | 0.2       | 0.0    | 3175                                 |
| Service - tug           | 0-+           | GT      | 14046         | 3997 | 0.28                                     | 105                      | 2288                      | 12.0                      | 100              | 7.0                     | 0.4                             | 0.1       | 0.0    | 20793                                |
| Miscellaneous - fishing | 0-+           | GT      | 23518         | 3671 | 0.16                                     | 153                      | 929                       | 11.5                      | 173              | 7.7                     | 0.4                             | 0.4       | 0.0    | 57749                                |
| Offshore                | 0-+           | GT      | 6280          | 4400 | 0.70                                     | 1468                     | 4554                      | 14.7                      | 114              | 8.4                     | 0.8                             | 0.6       | 0.0    | 25848                                |
| Service - other         | 0-+           | GT      | 2992          | 2348 | 0.78                                     | 2345                     | 3505                      | 13.0                      | 116              | 8.0                     | 0.8                             | 0.4       | 0.0    | 10471                                |
| Miscellaneous - other   | 0-+           | GT      | 3465          | 44   | 0.01                                     | 29                       | 1905                      | 12.7                      | 110              | 7.9                     | 0.4                             | 0.3       | 0.0    | 8531                                 |

## 2009 Detailed Results

| Ship type             | Size category | Units  | Number active |       | Decimal AIS Coverage of in-service ships | Avg. deadweight (tonnes) | Avg. installed power (kW) | Avg. design speed (knots) | Avg. days at sea | Avg.* sea speed (knots) | Avg.* consumption ('000 tonnes) |           |        | Total carbon emissions ('000 tonnes) |
|-----------------------|---------------|--------|---------------|-------|--|--------------------------|---------------------------|---------------------------|------------------|-------------------------|---------------------------------|-----------|--------|--------------------------------------|
|                       |               |        | IHSF          | AIS   |  |                          |                           |                           |                  |                         | main                            | auxiliary | Boiler |                                      |
| Bulk carrier          | 0-9999        | dwt    | 1196          | 533   | 0.45                                     | 3309                     | 1689                      | 11.8                      | 154              | 10.2                    | 1058.9                          | 492.0     | 74.9   | 5835                                 |
|                       | 10000-34999   | dwt    | 2241          | 2034  | 0.91                                     | 26915                    | 6896                      | 15.3                      | 184              | 12.0                    | 3844.0                          | 483.3     | 68.0   | 28702                                |
|                       | 35000-59999   | dwt    | 2171          | 2106  | 0.97                                     | 50143                    | 8917                      | 15.4                      | 202              | 12.6                    | 5690.7                          | 664.4     | 121.9  | 41069                                |
|                       | 60000-99999   | dwt    | 1691          | 1657  | 0.98                                     | 77454                    | 10450                     | 15.1                      | 226              | 13.0                    | 8522.5                          | 1047.0    | 209.6  | 49201                                |
|                       | 100000-199999 | dwt    | 796           | 791   | 0.99                                     | 174314                   | 16420                     | 15.5                      | 243              | 13.3                    | 14176.                          | 1021.0    | 185.1  | 36336                                |
| Chemical tanker       | 200000-+      | dwt    | 168           | 166   | 0.99                                     | 272464                   | 21553                     | 16.4                      | 285              | 13.0                    | 18441.                          | 942.9     | 134.8  | 9496                                 |
|                       | 0-4999        | dwt    | 1547          | 819   | 0.53                                     | 2480                     | 1384                      | 12.0                      | 153              | 10.3                    | 833.0                           | 185.6     | 191.2  | 5605                                 |
|                       | 5000-9999     | dwt    | 830           | 783   | 0.94                                     | 9114                     | 3624                      | 14.3                      | 170              | 11.5                    | 2019.6                          | 547.9     | 369.3  | 7122                                 |
|                       | 10000-19999   | dwt    | 929           | 913   | 0.98                                     | 16650                    | 5730                      | 15.3                      | 164              | 12.5                    | 3121.8                          | 543.5     | 371.2  | 11049                                |
| Container             | 20000-+       | dwt    | 1342          | 1321  | 0.98                                     | 44203                    | 9796                      | 15.9                      | 180              | 13.1                    | 5894.3                          | 1333.4    | 351.2  | 30146                                |
|                       | 0-999         | TEU    | 1202          | 1081  | 0.90                                     | 9059                     | 6117                      | 16.9                      | 183              | 13.2                    | 3136.7                          | 836.4     | 169.4  | 14896                                |
|                       | 1000-1999     | TEU    | 1299          | 1282  | 0.99                                     | 21440                    | 13120                     | 20.1                      | 185              | 15.1                    | 5719.6                          | 2100.9    | 412.2  | 32292                                |
|                       | 2000-2999     | TEU    | 762           | 752   | 0.99                                     | 37550                    | 22613                     | 22.4                      | 217              | 16.8                    | 11432.                          | 2968.3    | 428.0  | 33759                                |
|                       | 3000-4999     | TEU    | 882           | 874   | 0.99                                     | 56648                    | 37734                     | 25.0                      | 238              | 17.6                    | 17693.                          | 3734.6    | 537.6  | 57338                                |
|                       | 5000-7999     | TEU    | 520           | 514   | 0.99                                     | 79317                    | 57944                     | 26.0                      | 266              | 19.2                    | 32751.                          | 3772.4    | 460.8  | 58162                                |
|                       | 8000-11999    | TEU    | 206           | 204   | 0.99                                     | 114387                   | 73942                     | 27.3                      | 283              | 19.9                    | 44799.                          | 3968.4    | 450.0  | 29992                                |
|                       | 12000-14500   | TEU    | 13            | 13    | 1.00                                     | 187649                   | 91187                     | 29.2                      | 299              | 17.4                    | 37762.                          | 4748.0    | 674.0  | 1636                                 |
|                       | 14500-+       | TEU    | 0             | 0     | 0.00                                     | 0                        | 0                         | 0.0                       |                  |                         |                                 |           |        | 0                                    |
|                       | General cargo | 0-4999 | dwt           | 12940 | 5386                                     | 0.42                     | 1915                      | 1102                      | 11.4             | 175                     | 9.2                             | 636.8     | 142.0  | 0.0                                  |
| 5000-9999             |               | dwt    | 2898          | 2418  | 0.83                                     | 7433                     | 3424                      | 13.9                      | 184              | 10.9                    | 1886.5                          | 409.0     | 105.0  | 20675                                |
| 10000-+               |               | dwt    | 2125          | 1888  | 0.89                                     | 22274                    | 7670                      | 16.5                      | 200              | 12.6                    | 4499.3                          | 1160.0    | 127.9  | 35927                                |
| Liquefied gas tanker  | 0-49999       | cbm    | 1050          | 840   | 0.80                                     | 6567                     | 3663                      | 14.1                      | 175              | 12.2                    | 2435.6                          | 589.4     | 406.1  | 10863                                |
|                       | 50000-199999  | cbm    | 443           | 436   | 0.98                                     | 69596                    | 22561                     | 19.3                      | 204              | 14.6                    | 12437.                          | 4189.3    | 594.1  | 21056                                |
|                       | 200000-+      | cbm    | 39            | 38    | 0.97                                     | 141887                   | 43662                     | 23.4                      | 225              | 16.7                    | 22139.                          | 3749.2    | 1007.2 | 2952                                 |
| Oil tanker            | 0-4999        | dwt    | 3708          | 1249  | 0.34                                     | 1815                     | 1134                      | 11.3                      | 102              | 9.4                     | 490.1                           | 627.0     | 184.5  | 14575                                |
|                       | 5000-9999     | dwt    | 555           | 403   | 0.73                                     | 6938                     | 2953                      | 13.0                      | 128              | 9.9                     | 1181.8                          | 955.2     | 265.8  | 3952                                 |
|                       | 10000-19999   | dwt    | 218           | 176   | 0.81                                     | 15622                    | 4881                      | 13.9                      | 113              | 10.2                    | 1646.7                          | 1549.9    | 439.7  | 2219                                 |
|                       | 20000-59999   | dwt    | 707           | 659   | 0.93                                     | 44340                    | 8929                      | 15.6                      | 166              | 12.4                    | 4469.3                          | 1921.0    | 615.7  | 14471                                |
|                       | 60000-79999   | dwt    | 396           | 376   | 0.95                                     | 75368                    | 12423                     | 15.7                      | 193              | 13.2                    | 8116.5                          | 1840.1    | 577.5  | 12252                                |
|                       | 80000-119999  | dwt    | 834           | 817   | 0.98                                     | 111331                   | 14000                     | 15.7                      | 175              | 12.9                    | 7675.6                          | 2516.5    | 810.5  | 27224                                |
|                       | 120000-199999 | dwt    | 400           | 390   | 0.98                                     | 163045                   | 18676                     | 16.1                      | 214              | 13.2                    | 12405.                          | 3013.8    | 942.5  | 19029                                |
|                       | 200000-+      | dwt    | 558           | 551   | 0.99                                     | 317023                   | 27254                     | 16.5                      | 232              | 14.3                    | 22478.                          | 3551.9    | 1082.2 | 44756                                |
| Other liquids tankers | 0-+           | dwt    | 164           | 25    | 0.15                                     | 691                      | 563                       | 9.6                       | 65               | 7.0                     | 131.0                           | 1167.4    | 417.5  | 858                                  |

| Ship type               | Size category | Units   | Number active |      | Decimal AIS Coverage of in-service ships | Avg. deadweight (tonnes) | Avg. installed power (kW) | Avg. design speed (knots) | Avg. days at sea | Avg.* sea speed (knots) | Avg.* consumption ('000 tonnes) |           |        | Total carbon emissions ('000 tonnes) |
|-------------------------|---------------|---------|---------------|------|--|--------------------------|---------------------------|---------------------------|------------------|-------------------------|---------------------------------|-----------|--------|--------------------------------------|
|                         |               |         | IHSF          | AIS  |  |                          |                           |                           |                  |                         | main                            | auxiliary | Boiler |                                      |
| Ferry-pax only          | 0-1999        | GT      | 3028          | 799  | 0.26                                     | 201                      | 1911                      | 23.0                      | 103              | 17.8                    | 774.0                           | 335.1     | 0.0    | 10153                                |
|                         | 2000-+        | GT      | 75            | 36   | 0.48                                     | 1738                     | 6863                      | 17.1                      | 128              | 13.5                    | 2643.                           | 928.8     | 0.0    | 777                                  |
| Cruise                  | 0-1999        | GT      | 203           | 59   | 0.29                                     | 176                      | 969                       | 12.7                      | 76               | 9.0                     | 225.9                           | 988.0     | 493.9  | 1028                                 |
|                         | 2000-9999     | GT      | 75            | 57   | 0.76                                     | 1180                     | 4547                      | 16.1                      | 191              | 11.0                    | 2024.                           | 985.5     | 366.6  | 747                                  |
|                         | 10000-59999   | GT      | 125           | 116  | 0.93                                     | 4624                     | 20154                     | 20.3                      | 208              | 14.8                    | 1051                            | 8888.2    | 1292.5 | 7553                                 |
|                         | 60000-99999   | GT      | 77            | 76   | 0.99                                     | 8500                     | 53263                     | 22.3                      | 246              | 16.1                    | 2837                            | 26307.1   | 626.4  | 13037                                |
|                         | 100000-+      | GT      | 38            | 38   | 1.00                                     | 11610                    | 76730                     | 23.5                      | 262              | 16.8                    | 4302                            | 25366.1   | 538.7  | 7811                                 |
| Ferry-RoPax             | 0-1999        | GT      | 1634          | 495  | 0.30                                     | 400                      | 1541                      | 13.4                      | 87               | 10.8                    | 533.4                           | 187.6     | 0.0    | 3485                                 |
|                         | 2000-+        | GT      | 1273          | 987  | 0.78                                     | 3201                     | 15541                     | 22.0                      | 193              | 17.0                    | 9095.                           | 1333.6    | 0.0    | 38412                                |
| Refrigerated bulk       | 0-1999        | dwt     | 1221          | 903  | 0.74                                     | 5591                     | 5036                      | 16.3                      | 146              | 13.6                    | 2758.                           | 2220.3    | 447.1  | 20234                                |
| Ro-Ro                   | 0-4999        | dwt     | 1277          | 455  | 0.36                                     | 1675                     | 1819                      | 11.6                      | 152              | 9.7                     | 1221.                           | 2301.7    | 296.7  | 14538                                |
|                         | 5000-+        | dwt     | 486           | 456  | 0.94                                     | 11718                    | 11352                     | 18.0                      | 222              | 14.5                    | 7624.                           | 3447.8    | 350.7  | 16758                                |
| Vehicle                 | 0-3999        | vehicle | 349           | 311  | 0.89                                     | 10494                    | 9458                      | 20.1                      | 226              | 14.8                    | 6116.                           | 1420.7    | 286.5  | 7724                                 |
|                         | 4000-+        | vehicle | 516           | 507  | 0.98                                     | 20862                    | 14945                     | 21.8                      | 238              | 16.2                    | 8779.                           | 1472.6    | 282.7  | 15710                                |
| Yacht                   | 0-+           | GT      | 1436          | 768  | 0.53                                     | 322                      | 2835                      | 16.7                      | 37               | 12.2                    | 273.5                           | 243.0     | 0.0    | 2304                                 |
| Service - tug           | 0-+           | GT      | 13462         | 3673 | 0.27                                     | 275                      | 2329                      | 12.0                      | 61               | 7.8                     | 295.7                           | 92.8      | 0.0    | 16504                                |
| Miscellaneous - fishing | 0-+           | GT      | 23421         | 2806 | 0.12                                     | 151                      | 911                       | 11.5                      | 94               | 8.8                     | 287.2                           | 327.3     | 0.0    | 44452                                |
| Offshore                | 0-+           | GT      | 5671          | 3883 | 0.68                                     | 1758                     | 4317                      | 14.4                      | 71               | 9.2                     | 609.4                           | 595.8     | 0.0    | 20399                                |
| Service - other         | 0-+           | GT      | 3286          | 2186 | 0.67                                     | 2089                     | 2702                      | 12.4                      | 74               | 8.8                     | 528.8                           | 412.1     | 0.0    | 9153                                 |
| Miscellaneous - other   | 0-+           | GT      | 3755          | 158  | 0.04                                     | 78                       | 2010                      | 13.1                      | 90               | 9.0                     | 759.9                           | 358.8     | 0.0    | 13178                                |

## 2008 Detailed Results

| Ship type             | Size category | Units | Number active |      | Decimal AIS Coverage of in-service ships | Avg. deadweight (tonnes) | Avg. installed power (kW) | Avg. design speed (knots) | Avg. days at sea | Avg.* sea speed (knots) | Avg.* consumption ('000 tonnes) |           |        | Total carbon emissions ('000 tonnes) |
|-----------------------|---------------|-------|---------------|------|--|--------------------------|---------------------------|---------------------------|------------------|-------------------------|---------------------------------|-----------|--------|--------------------------------------|
|                       |               |       | IHSF          | AIS  |  |                          |                           |                           |                  |                         | main                            | auxiliary | Boiler |                                      |
| Bulk carrier          | 0-9999        | dwt   | 1151          | 470  | 0.41                                     | 3100                     | 1654                      | 11.6                      | 173              | 10.3                    | 1.2                             | 0.5       | 0.1    | 6328                                 |
|                       | 10000-34999   | dwt   | 2177          | 1993 | 0.92                                     | 25515                    | 6633                      | 14.7                      | 251              | 12.2                    | 5.7                             | 0.5       | 0.0    | 40377                                |
|                       | 35000-59999   | dwt   | 2030          | 1957 | 0.96                                     | 48249                    | 8611                      | 15.0                      | 249              | 12.7                    | 7.3                             | 0.6       | 0.1    | 48479                                |
|                       | 60000-99999   | dwt   | 1616          | 1593 | 0.99                                     | 75867                    | 10261                     | 14.9                      | 265              | 13.1                    | 10.0                            | 1.0       | 0.2    | 54465                                |
|                       | 100000-199999 | dwt   | 724           | 718  | 0.99                                     | 165582                   | 15500                     | 14.7                      | 273              | 13.2                    | 16.0                            | 1.0       | 0.1    | 37983                                |
|                       | 200000+       | dwt   | 129           | 128  | 0.99                                     | 252904                   | 19666                     | 15.6                      | 268              | 12.5                    | 15.8                            | 1.0       | 0.2    | 6422                                 |
| Chemical tanker       | 0-4999        | dwt   | 1514          | 769  | 0.51                                     | 2163                     | 1364                      | 12.1                      | 166              | 10.5                    | 1.0                             | 0.2       | 0.2    | 6023                                 |
|                       | 5000-9999     | dwt   | 728           | 682  | 0.94                                     | 8164                     | 3602                      | 14.4                      | 227              | 11.8                    | 2.9                             | 0.5       | 0.3    | 7803                                 |
|                       | 10000-19999   | dwt   | 770           | 747  | 0.97                                     | 16737                    | 5838                      | 15.7                      | 233              | 12.8                    | 4.8                             | 0.5       | 0.3    | 12314                                |
|                       | 20000+        | dwt   | 1177          | 1154 | 0.98                                     | 43482                    | 9859                      | 15.9                      | 241              | 13.6                    | 8.8                             | 1.3       | 0.2    | 35333                                |
| Container             | 0-999         | TEU   | 1200          | 1082 | 0.90                                     | 9284                     | 6187                      | 17.0                      | 178              | 13.2                    | 3.0                             | 0.8       | 0.2    | 14564                                |
|                       | 1000-1999     | TEU   | 1275          | 1253 | 0.98                                     | 21824                    | 13367                     | 20.3                      | 179              | 15.2                    | 5.8                             | 2.2       | 0.4    | 32098                                |
|                       | 2000-2999     | TEU   | 745           | 733  | 0.98                                     | 37556                    | 22678                     | 22.3                      | 178              | 16.7                    | 9.5                             | 3.1       | 0.5    | 29362                                |
|                       | 3000-4999     | TEU   | 797           | 779  | 0.98                                     | 56036                    | 37246                     | 24.7                      | 253              | 18.1                    | 20.9                            | 13.3      | 2.8    | 60102                                |
|                       | 5000-7999     | TEU   | 484           | 472  | 0.98                                     | 80503                    | 58986                     | 26.5                      | 246              | 19.7                    | 32.6                            | 3.8       | 0.5    | 53345                                |
|                       | 8000-11999    | TEU   | 172           | 172  | 1.00                                     | 117315                   | 76127                     | 28.4                      | 250              | 20.3                    | 41.3                            | 4.1       | 0.6    | 22853                                |
|                       | 12000-14500   | TEU   | 8             | 8    | 1.00                                     | 163136                   | 83302                     | 25.7                      | 249              | 19.2                    | 44.0                            | 5.1       | 0.7    | 1237                                 |
|                       | 14500+        | TEU   | 0             | 0    | 0.00                                     | 0                        | 0                         | 0.0                       | 0                | 0.0                     | -                               | -         | -      | 0                                    |
| General cargo         | 0-4999        | dwt   | 12990         | 5283 | 0.41                                     | 1904                     | 1081                      | 11.4                      | 169              | 9.2                     | 0.6                             | 0.1       | 0.0    | 29685                                |
|                       | 5000-9999     | dwt   | 2763          | 2288 | 0.83                                     | 7321                     | 3445                      | 14.0                      | 258              | 11.3                    | 2.9                             | 0.4       | 0.1    | 27708                                |
|                       | 10000+        | dwt   | 2006          | 1780 | 0.89                                     | 21444                    | 7416                      | 15.9                      | 251              | 12.9                    | 6.1                             | 1.2       | 0.1    | 43905                                |
| Liquefied gas tanker  | 0-49999       | cbm   | 1021          | 804  | 0.79                                     | 6544                     | 3643                      | 14.1                      | 174              | 12.2                    | 2.7                             | 0.6       | 0.4    | 11423                                |
|                       | 50000-199999  | cbm   | 415           | 408  | 0.98                                     | 69872                    | 22749                     | 19.7                      | 247              | 15.0                    | 16.1                            | 4.0       | 0.5    | 23043                                |
|                       | 200000+       | cbm   | 21            | 20   | 0.95                                     | 188232                   | 61990                     | 33.4                      | 225              | 17.5                    | 20.1                            | 3.0       | 0.8    | 1212                                 |
| Oil tanker            | 0-4999        | dwt   | 3722          | 1133 | 0.30                                     | 1909                     | 1172                      | 11.3                      | 158              | 9.6                     | 0.8                             | 0.6       | 0.1    | 17211                                |
|                       | 5000-9999     | dwt   | 527           | 367  | 0.70                                     | 6857                     | 2925                      | 13.2                      | 166              | 10.1                    | 1.5                             | 0.9       | 0.2    | 4090                                 |
|                       | 10000-19999   | dwt   | 227           | 177  | 0.78                                     | 16073                    | 5115                      | 14.3                      | 163              | 10.8                    | 2.6                             | 1.6       | 0.4    | 2961                                 |
|                       | 20000-59999   | dwt   | 714           | 664  | 0.93                                     | 44502                    | 9023                      | 15.8                      | 227              | 12.7                    | 6.5                             | 1.8       | 0.6    | 18408                                |
|                       | 60000-79999   | dwt   | 358           | 341  | 0.95                                     | 74030                    | 11962                     | 15.5                      | 224              | 13.4                    | 9.9                             | 1.8       | 0.5    | 12841                                |
|                       | 80000-119999  | dwt   | 773           | 755  | 0.98                                     | 109452                   | 13925                     | 15.7                      | 244              | 13.2                    | 11.7                            | 2.3       | 0.7    | 33550                                |
|                       | 120000-199999 | dwt   | 369           | 363  | 0.98                                     | 156778                   | 17912                     | 15.5                      | 258              | 13.6                    | 16.5                            | 2.9       | 0.9    | 22222                                |
|                       | 200000+       | dwt   | 526           | 519  | 0.99                                     | 312723                   | 26450                     | 16.4                      | 262              | 14.6                    | 27.1                            | 3.4       | 1.0    | 48545                                |
| Other liquids tankers | 0+            | dwt   | 165           | 26   | 0.16                                     | 775                      | 606                       | 10.0                      | 76               | 7.7                     | 0.3                             | 1.1       | 0.4    | 866                                  |

| Ship type               | Size category | Units   | Number active |      | Decimal AIS Coverage of in-service ships | Avg. deadweight (tonnes) | Avg. installed power (kW) | Avg. design speed (knots) | Avg. days at sea | Avg.* sea speed (knots) | Avg.* consumption ('000 tonnes) |           |        | Total carbon emissions ('000 tonnes) |
|-------------------------|---------------|---------|---------------|------|--|--------------------------|---------------------------|---------------------------|------------------|-------------------------|---------------------------------|-----------|--------|--------------------------------------|
|                         |               |         | IHSF          | AIS  |  |                          |                           |                           |                  |                         | main                            | auxiliary | Boiler |                                      |
| Ferry-pax only          | 0-1999        | GT      | 2988          | 620  | 0.21                                     | 162                      | 1877                      | 22.8                      | 207              | 18.7                    | 1.7                             | 0.3       | 0.0    | 17961                                |
|                         | 2000-+        | GT      | 80            | 35   | 0.44                                     | 1643                     | 6587                      | 16.9                      | 207              | 13.1                    | 4.0                             | 0.9       | 0.0    | 1152                                 |
| Cruise                  | 0-1999        | GT      | 194           | 50   | 0.26                                     | 241                      | 1048                      | 13.0                      | 165              | 9.3                     | 0.5                             | 0.9       | 0.4    | 1045                                 |
|                         | 2000-9999     | GT      | 78            | 57   | 0.73                                     | 1174                     | 4366                      | 15.9                      | 205              | 11.4                    | 2.5                             | 1.0       | 0.4    | 920                                  |
|                         | 10000-59999   | GT      | 129           | 123  | 0.95                                     | 4687                     | 19888                     | 20.3                      | 213              | 14.8                    | 10.2                            | 8.9       | 1.3    | 7874                                 |
|                         | 60000-99999   | GT      | 77            | 75   | 0.97                                     | 8810                     | 55376                     | 22.9                      | 230              | 16.3                    | 27.1                            | 26.6      | 0.7    | 12834                                |
|                         | 100000-+      | GT      | 31            | 30   | 0.97                                     | 11088                    | 74258                     | 22.8                      | 265              | 17.1                    | 45.4                            | 25.6      | 0.5    | 6754                                 |
| Ferry-RoPax             | 0-1999        | GT      | 1633          | 395  | 0.24                                     | 1000                     | 1599                      | 13.4                      | 188              | 11.8                    | 1.6                             | 0.2       | 0.0    | 8533                                 |
|                         | 2000-+        | GT      | 1263          | 909  | 0.72                                     | 3400                     | 15520                     | 21.8                      | 201              | 17.2                    | 9.7                             | 1.3       | 0.0    | 39746                                |
| Refrigerated bulk       | 0-1999        | dwt     | 1243          | 930  | 0.75                                     | 5681                     | 5095                      | 16.5                      | 155              | 13.7                    | 3.0                             | 2.3       | 0.4    | 20898                                |
| Ro-Ro                   | 0-4999        | dwt     | 1224          | 396  | 0.32                                     | 1310                     | 1803                      | 11.6                      | 164              | 9.9                     | 1.3                             | 2.2       | 0.3    | 13901                                |
|                         | 5000-+        | dwt     | 472           | 449  | 0.95                                     | 11399                    | 11050                     | 17.7                      | 215              | 14.4                    | 7.2                             | 3.6       | 0.4    | 16021                                |
| Vehicle                 | 0-3999        | vehicle | 347           | 308  | 0.89                                     | 9315                     | 8345                      | 17.9                      | 263              | 14.9                    | 7.3                             | 1.4       | 0.2    | 9390                                 |
|                         | 4000-+        | vehicle | 468           | 464  | 0.99                                     | 20306                    | 14114                     | 20.7                      | 282              | 16.7                    | 11.8                            | 1.4       | 0.2    | 18706                                |
| Yacht                   | 0-+           | GT      | 1263          | 610  | 0.48                                     | 461                      | 2814                      | 16.9                      | 95               | 12.7                    | 0.7                             | 0.2       | 0.0    | 3813                                 |
| Service - tug           | 0-+           | GT      | 12618         | 2969 | 0.24                                     | 243                      | 2253                      | 12.0                      | 167              | 8.5                     | 0.9                             | 0.1       | 0.0    | 41321                                |
| Miscellaneous - fishing | 0-+           | GT      | 23622         | 2177 | 0.09                                     | 149                      | 908                       | 11.5                      | 217              | 9.4                     | 0.8                             | 0.3       | 0.0    | 80361                                |
| Offshore                | 0-+           | GT      | 5140          | 3292 | 0.64                                     | 1666                     | 4115                      | 14.4                      | 200              | 9.7                     | 2.0                             | 0.8       | 0.0    | 39293                                |
| Service - other         | 0-+           | GT      | 3014          | 1879 | 0.62                                     | 1941                     | 2643                      | 12.2                      | 136              | 9.1                     | 1.0                             | 0.4       | 0.0    | 13128                                |
| Miscellaneous - other   | 0-+           | GT      | 3902          | 140  | 0.04                                     | 101                      | 1957                      | 12.7                      | 135              | 8.3                     | 0.8                             | 0.4       | 0.0    | 14454                                |

## 2007 Detailed Results

| Ship type             | Size category | Units | Number active |      | Decimal AIS Coverage of in-service ships | Avg. deadweight (tonnes) | Avg. installed power (kW) | Avg. design speed (knots) | Avg. days at sea | Avg.* sea speed (knots) | Avg.* consumption ('000 tonnes) |           |        | Total carbon emissions ('000 tonnes) |
|-----------------------|---------------|-------|---------------|------|--|--------------------------|---------------------------|---------------------------|------------------|-------------------------|---------------------------------|-----------|--------|--------------------------------------|
|                       |               |       | IHSF          | AIS  |  |                          |                           |                           |                  |                         | main                            | auxiliary | Boiler |                                      |
| Bulk carrier          | 0-9999        | dwt   | 1136          | 382  | 0.34                                     | 3001                     | 1601                      | 11.6                      | 168              | 10.3                    | 1.2                             | 0.5       | 0.1    | 6053                                 |
|                       | 10000-34999   | dwt   | 2115          | 1916 | 0.91                                     | 25405                    | 6631                      | 14.6                      | 245              | 12.2                    | 5.6                             | 0.5       | 0.0    | 38324                                |
|                       | 35000-59999   | dwt   | 1911          | 1849 | 0.97                                     | 47402                    | 8494                      | 14.9                      | 248              | 12.7                    | 7.3                             | 0.6       | 0.1    | 45407                                |
|                       | 60000-99999   | dwt   | 1532          | 1511 | 0.99                                     | 75373                    | 10204                     | 14.9                      | 258              | 13.0                    | 9.9                             | 1.0       | 0.2    | 50373                                |
|                       | 100000-199999 | dwt   | 694           | 688  | 0.99                                     | 166172                   | 15516                     | 14.8                      | 271              | 12.8                    | 15.1                            | 1.0       | 0.2    | 34187                                |
|                       | 200000+       | dwt   | 102           | 100  | 0.98                                     | 247529                   | 18925                     | 15.6                      | 267              | 11.5                    | 13.3                            | 1.0       | 0.2    | 4319                                 |
| Chemical tanker       | 0-4999        | dwt   | 1481          | 680  | 0.46                                     | 2032                     | 1303                      | 12.0                      | 170              | 10.6                    | 1.0                             | 0.2       | 0.2    | 6014                                 |
|                       | 5000-9999     | dwt   | 650           | 602  | 0.93                                     | 7633                     | 3418                      | 13.8                      | 225              | 11.9                    | 3.1                             | 0.5       | 0.3    | 7263                                 |
|                       | 10000-19999   | dwt   | 636           | 619  | 0.97                                     | 16200                    | 5688                      | 15.3                      | 232              | 12.9                    | 5.1                             | 0.5       | 0.3    | 10804                                |
|                       | 20000+        | dwt   | 1057          | 1037 | 0.98                                     | 42758                    | 9631                      | 15.8                      | 242              | 13.7                    | 9.0                             | 1.3       | 0.2    | 32561                                |
| Container             | 0-999         | TEU   | 1138          | 1015 | 0.89                                     | 8976                     | 6004                      | 16.7                      | 178              | 13.3                    | 3.1                             | 0.9       | 0.2    | 14177                                |
|                       | 1000-1999     | TEU   | 1159          | 1142 | 0.99                                     | 21644                    | 13153                     | 20.0                      | 180              | 15.2                    | 6.0                             | 2.2       | 0.4    | 29855                                |
|                       | 2000-2999     | TEU   | 691           | 684  | 0.99                                     | 36869                    | 22228                     | 21.9                      | 178              | 16.8                    | 9.9                             | 3.2       | 0.5    | 28440                                |
|                       | 3000-4999     | TEU   | 726           | 720  | 0.99                                     | 56198                    | 37068                     | 24.7                      | 257              | 18.6                    | 22.8                            | 3.6       | 0.5    | 58439                                |
|                       | 5000-7999     | TEU   | 436           | 432  | 0.99                                     | 79567                    | 58342                     | 26.3                      | 248              | 20.6                    | 37.2                            | 3.8       | 0.5    | 54287                                |
|                       | 8000-11999    | TEU   | 135           | 135  | 1.00                                     | 116415                   | 76214                     | 28.2                      | 249              | 21.3                    | 48.0                            | 4.1       | 0.5    | 20417                                |
|                       | 12000-14500   | TEU   | 7             | 7    | 1.00                                     | 245802                   | 125669                    | 38.4                      | 249              | 20.6                    | 46.6                            | 4.1       | 0.6    | 889                                  |
|                       | 14500+        | TEU   | 0             | 0    | 0.00                                     | 0                        | 0                         | 0.0                       | 0                | 0.0                     | -                               | -         | -      | 0                                    |
| General cargo         | 0-4999        | dwt   | 12931         | 4934 | 0.38                                     | 1796                     | 1053                      | 11.3                      | 170              | 9.3                     | 0.6                             | 0.1       | 0.0    | 29888                                |
|                       | 5000-9999     | dwt   | 2658          | 2146 | 0.81                                     | 7214                     | 3416                      | 13.9                      | 257              | 11.4                    | 3.0                             | 0.4       | 0.1    | 27187                                |
|                       | 10000+        | dwt   | 1912          | 1672 | 0.87                                     | 21106                    | 7424                      | 15.8                      | 250              | 12.9                    | 6.3                             | 1.2       | 0.1    | 43063                                |
| Liquefied gas tanker  | 0-49999       | cbm   | 985           | 707  | 0.72                                     | 6027                     | 3452                      | 13.9                      | 174              | 12.4                    | 2.8                             | 0.6       | 0.4    | 11265                                |
|                       | 50000-199999  | cbm   | 380           | 374  | 0.98                                     | 68516                    | 22601                     | 19.5                      | 240              | 14.8                    | 15.8                            | 4.0       | 0.6    | 21027                                |
|                       | 200000+       | cbm   | 4             | 4    | 1.00                                     | 410794                   | 149277                    | 78.0                      | 250              | 15.4                    | 6.3                             | 1.1       | 0.3    | 96                                   |
| Oil tanker            | 0-4999        | dwt   | 3703          | 887  | 0.24                                     | 1759                     | 1110                      | 11.2                      | 158              | 9.7                     | 0.8                             | 0.6       | 0.1    | 17566                                |
|                       | 5000-9999     | dwt   | 497           | 310  | 0.62                                     | 6735                     | 2836                      | 13.0                      | 162              | 10.3                    | 1.5                             | 0.9       | 0.2    | 3849                                 |
|                       | 10000-19999   | dwt   | 228           | 168  | 0.74                                     | 15910                    | 5069                      | 14.0                      | 161              | 10.8                    | 2.6                             | 1.5       | 0.4    | 2907                                 |
|                       | 20000-59999   | dwt   | 709           | 644  | 0.91                                     | 42177                    | 8702                      | 15.4                      | 211              | 12.7                    | 6.4                             | 1.8       | 0.5    | 17592                                |
|                       | 60000-79999   | dwt   | 347           | 329  | 0.95                                     | 74629                    | 11973                     | 15.7                      | 220              | 13.4                    | 10.2                            | 1.8       | 0.5    | 12341                                |
|                       | 80000-119999  | dwt   | 741           | 717  | 0.97                                     | 107004                   | 13507                     | 15.3                      | 241              | 13.3                    | 12.0                            | 2.3       | 0.7    | 32893                                |
|                       | 120000-199999 | dwt   | 378           | 371  | 0.98                                     | 156240                   | 17787                     | 15.4                      | 255              | 13.7                    | 17.1                            | 2.9       | 0.9    | 23099                                |
|                       | 200000+       | dwt   | 518           | 511  | 0.99                                     | 304950                   | 25549                     | 16.0                      | 267              | 14.6                    | 27.5                            | 3.5       | 1.0    | 49848                                |
| Other liquids tankers | 0+            | dwt   | 163           | 16   | 0.10                                     | 798                      | 612                       | 9.9                       | 183              | 9.0                     | 0.6                             | 1.2       | 0.4    | 1113                                 |

| Ship type             | Size category | Units   | Number active |      | Decimal AIS Coverage of in-service ships | Avg. deadweight (tonnes) | Avg. installed power (kW) | Avg. design speed (knots) | Avg. days at sea | Avg.* sea speed (knots) | Avg.* consumption ('000 tonnes) |           |        | Total carbon emissions ('000 tonnes) |
|-----------------------|---------------|---------|---------------|------|--|--------------------------|---------------------------|---------------------------|------------------|-------------------------|---------------------------------|-----------|--------|--------------------------------------|
|                       |               |         | IHSF          | AIS  |  |                          |                           |                           |                  |                         | main                            | auxiliary | Boiler |                                      |
| Ferry-pax only        | 0-1999        | GT      | 2974          | 450  | 0.15                                     | 143                      | 1824                      | 22.7                      | 205              | 18.9                    | 1.7                             | 0.3       | 0.0    | 18639                                |
|                       | 2000-+        | GT      | 80            | 27   | 0.34                                     | 1574                     | 7020                      | 16.5                      | 109              | 11.4                    | 2.1                             | 0.7       | 0.0    | 516                                  |
| Cruise                | 0-1999        | GT      | 182           | 43   | 0.24                                     | 189                      | 1017                      | 12.8                      | 142              | 9.4                     | 0.5                             | 0.9       | 0.3    | 873                                  |
|                       | 2000-9999     | GT      | 78            | 60   | 0.77                                     | 1155                     | 4289                      | 15.7                      | 177              | 10.9                    | 2.0                             | 1.0       | 0.3    | 735                                  |
|                       | 10000-59999   | GT      | 127           | 120  | 0.94                                     | 4629                     | 19222                     | 19.9                      | 224              | 14.7                    | 10.3                            | 9.0       | 1.3    | 8028                                 |
|                       | 60000-99999   | GT      | 73            | 72   | 0.99                                     | 8663                     | 54947                     | 22.8                      | 227              | 16.4                    | 28.2                            | 26.7      | 0.7    | 12188                                |
|                       | 100000-+      | GT      | 28            | 28   | 1.00                                     | 11262                    | 74422                     | 22.9                      | 264              | 16.9                    | 43.0                            | 25.7      | 0.6    | 5947                                 |
| Ferry-RoPax           | 0-1999        | GT      | 1611          | 306  | 0.19                                     | 317                      | 1484                      | 13.2                      | 185              | 11.0                    | 1.1                             | 0.2       | 0.0    | 6085                                 |
|                       | 2000-+        | GT      | 1248          | 809  | 0.65                                     | 3068                     | 15126                     | 21.5                      | 195              | 17.4                    | 10.0                            | 1.3       | 0.0    | 40092                                |
| Refrigerated bulk     | 0-1999        | dwt     | 1237          | 932  | 0.75                                     | 5500                     | 5060                      | 16.3                      | 148              | 13.6                    | 2.9                             | 2.3       | 0.4    | 20513                                |
| Ro-Ro                 | 0-4999        | dwt     | 1194          | 332  | 0.28                                     | 1212                     | 1803                      | 11.6                      | 157              | 10.2                    | 1.5                             | 2.1       | 0.3    | 13637                                |
|                       | 5000-+        | dwt     | 470           | 432  | 0.92                                     | 11401                    | 10985                     | 17.8                      | 216              | 14.6                    | 7.6                             | 3.5       | 0.4    | 16121                                |
| Vehicle               | 0-3999        | vehicle | 334           | 289  | 0.87                                     | 8935                     | 8079                      | 17.5                      | 262              | 14.9                    | 7.4                             | 1.4       | 0.2    | 9227                                 |
|                       | 4000-+        | vehicle | 422           | 417  | 0.99                                     | 19364                    | 13869                     | 20.5                      | 282              | 16.8                    | 12.2                            | 1.4       | 0.2    | 17393                                |
| Yacht                 | 0-+           | GT      | 1120          | 453  | 0.40                                     | 115                      | 2597                      | 16.6                      | 94               | 12.6                    | 0.7                             | 0.2       | 0.0    | 3276                                 |
| Service tug           | 0-+           | GT      | 12079         | 2182 | 0.18                                     | 84                       | 2158                      | 11.9                      | 168              | 8.6                     | 1.0                             | 0.1       | 0.0    | 41172                                |
| Miscellaneous fishing | 0-+           | GT      | 23658         | 1699 | 0.07                                     | 101                      | 880                       | 11.4                      | 216              | 9.7                     | 0.9                             | 0.3       | 0.0    | 86119                                |
| Offshore              | 0-+           | GT      | 4761          | 2545 | 0.53                                     | 1032                     | 3864                      | 14.1                      | 195              | 9.7                     | 2.0                             | 0.6       | 0.0    | 36037                                |
| Service other         | 0-+           | GT      | 2681          | 1546 | 0.58                                     | 1786                     | 2624                      | 12.2                      | 137              | 9.4                     | 1.1                             | 0.4       | 0.0    | 12430                                |
| Miscellaneous other   | 0-+           | GT      | 4027          | 58   | 0.01                                     | 34                       | 1905                      | 12.6                      | 119              | 8.7                     | 0.9                             | 0.3       | 0.0    | 15300                                |



## Annex 3 (details for Section 1.4, bottom-up QA/QC)

### Activity estimate quality of spatial coverage

It can be seen from Table 5 that the amount of messages per year usable for the bottom-up emission study is the largest in 2012, including sets from two different satellite sources (Kystverket, Exact Earth) and several terrestrial sources. The total number of AIS-messages successfully processed (all years) is over 8.3 billion. However, this number may include duplicate messages, especially near European coastal regions. The annual amount of messages is significantly smaller for 2007 – 2009 and for these years there were no S-AIS sources available.

The effect of the increase in messages is that coverage increases both temporally and geographically from 2007 to 2012. This section focused specifically on the geographical coverage.

Figure 10 and Figure 11 show the coverage of the AIS and LRIT datasets respectively with the same scale to facilitate comparability through the period. Most noticeable is that from 2010 to 2012 there are marked improvements particularly over ocean regions due to the inclusion of S-AIS. Europe is very well covered in all years but particularly from 2010 onwards. MarineTraffic and IHS are global coverage terrestrial-AIS sources, with the former substituting for the latter from 2010 onwards, resulting in what appears to be consistently improved shorebased message reception.

The 2012 and 2011 AIS dataset provides good global coverage with shipping routes clearly noticeable at this scale.

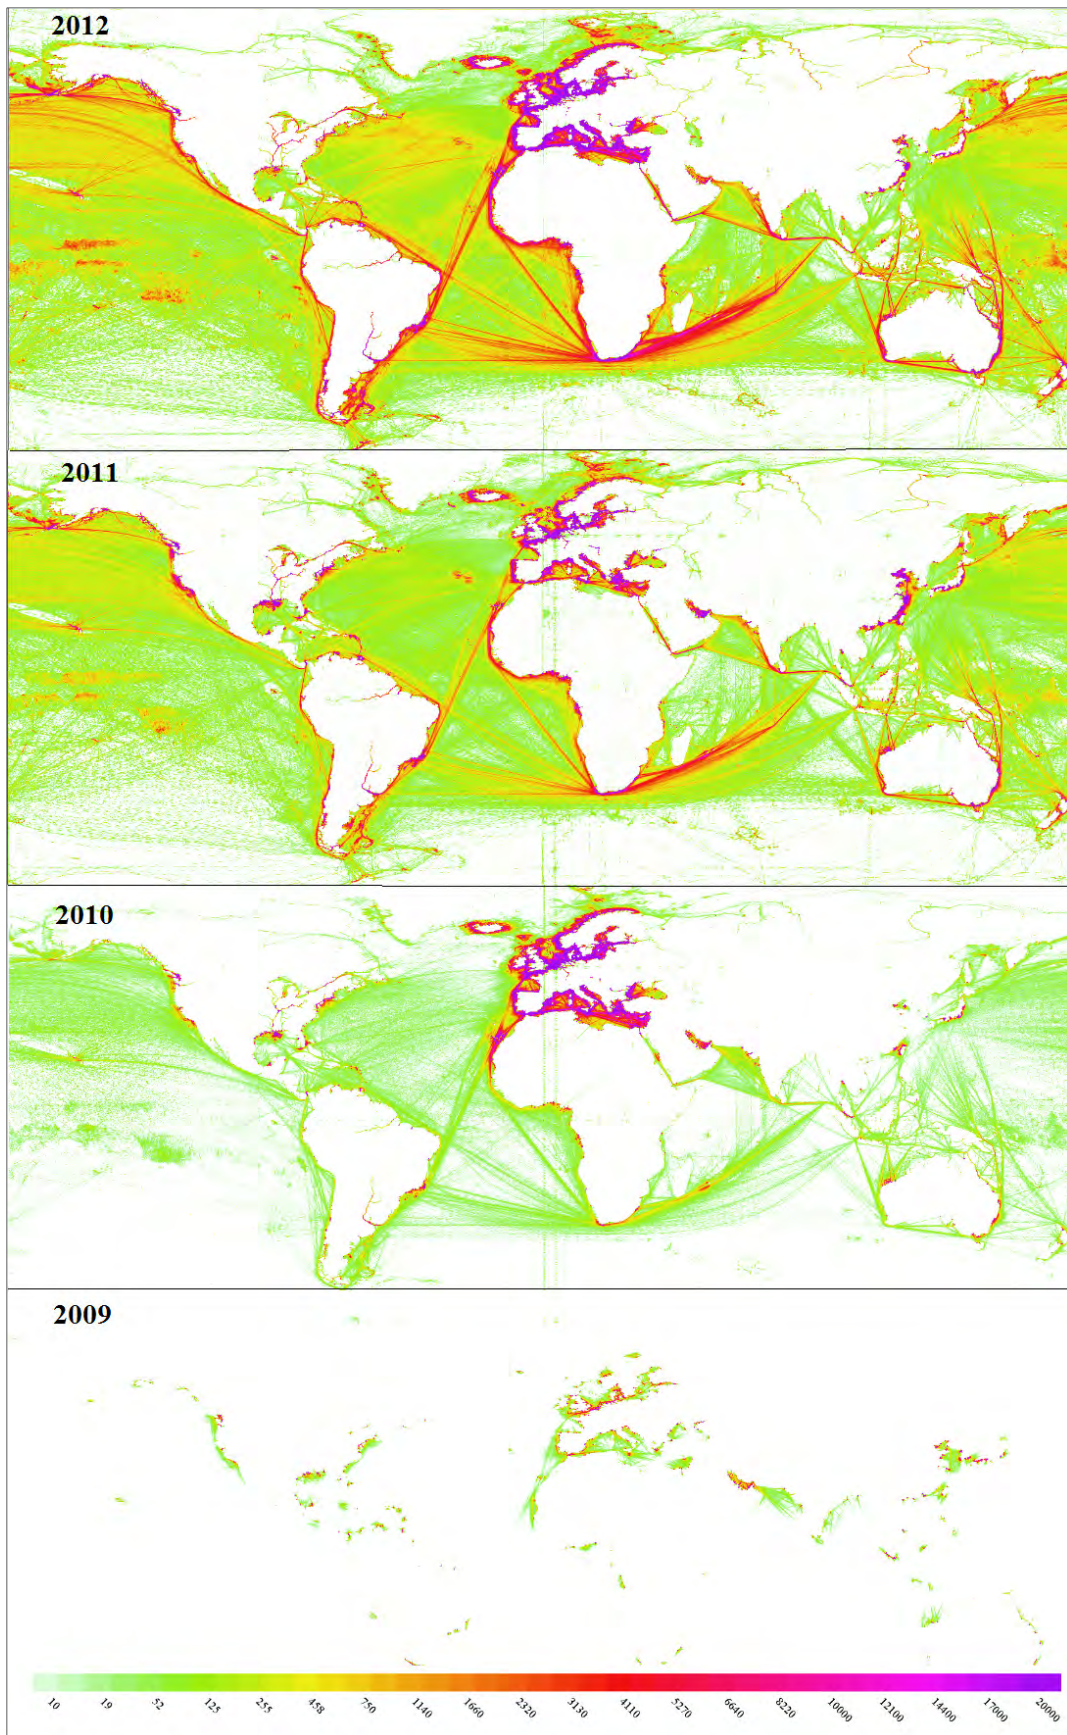


Figure 10: Geographical distribution of AIS-messages processed by the Pre-processor for 2009 – 2012. All available AIS datasets (both satellite and terrestrial) have been combined. Unit: total amount of messages per grid cell with an area of 0.2 x 0.2 degrees.

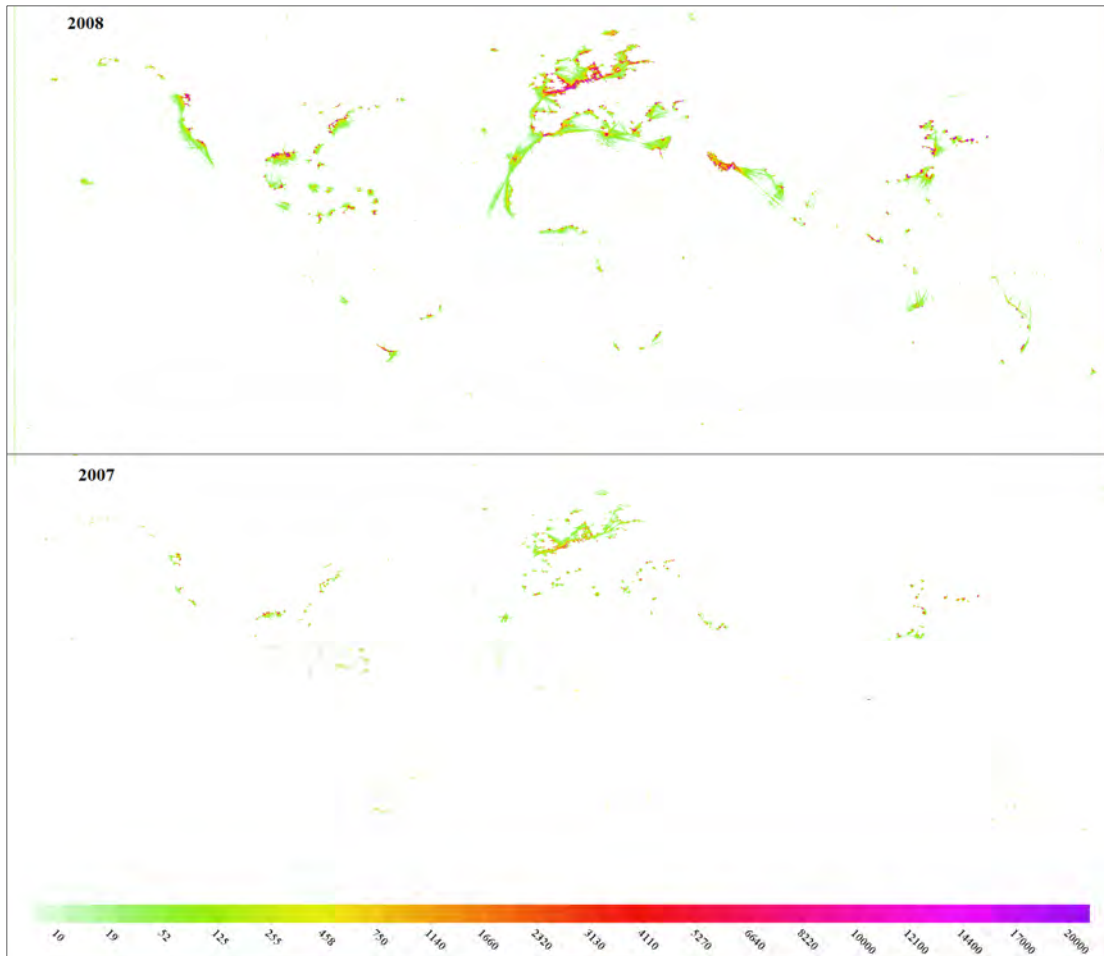


Figure 11: Repeat plots for 2008 and 2007 as for Figure 4 with the same scale.

As discussed in Annex 1, LRIT data was processed in a consistent way to the AIS sources. LRIT as a data source is discussed in more detail in the proceeding section on temporal coverage. Comparing LRIT with the AIS coverage, it's immediately apparent that the coverage is adequate for LRIT in the North Atlantic and Indian Ocean but poor in the Pacific. For the most part it is suitable as a corroborating dataset for coastal regions. The major areas of traffic highlighted by LRIT are the European sea area and the Far East (Singapore, China, Japan and South Korea) and the shipping lane connecting them. These areas and routes are well covered in the AIS from 2010. There are no regions that LRIT identifies that are not covered adequately by the 2010 to 2012 datasets.

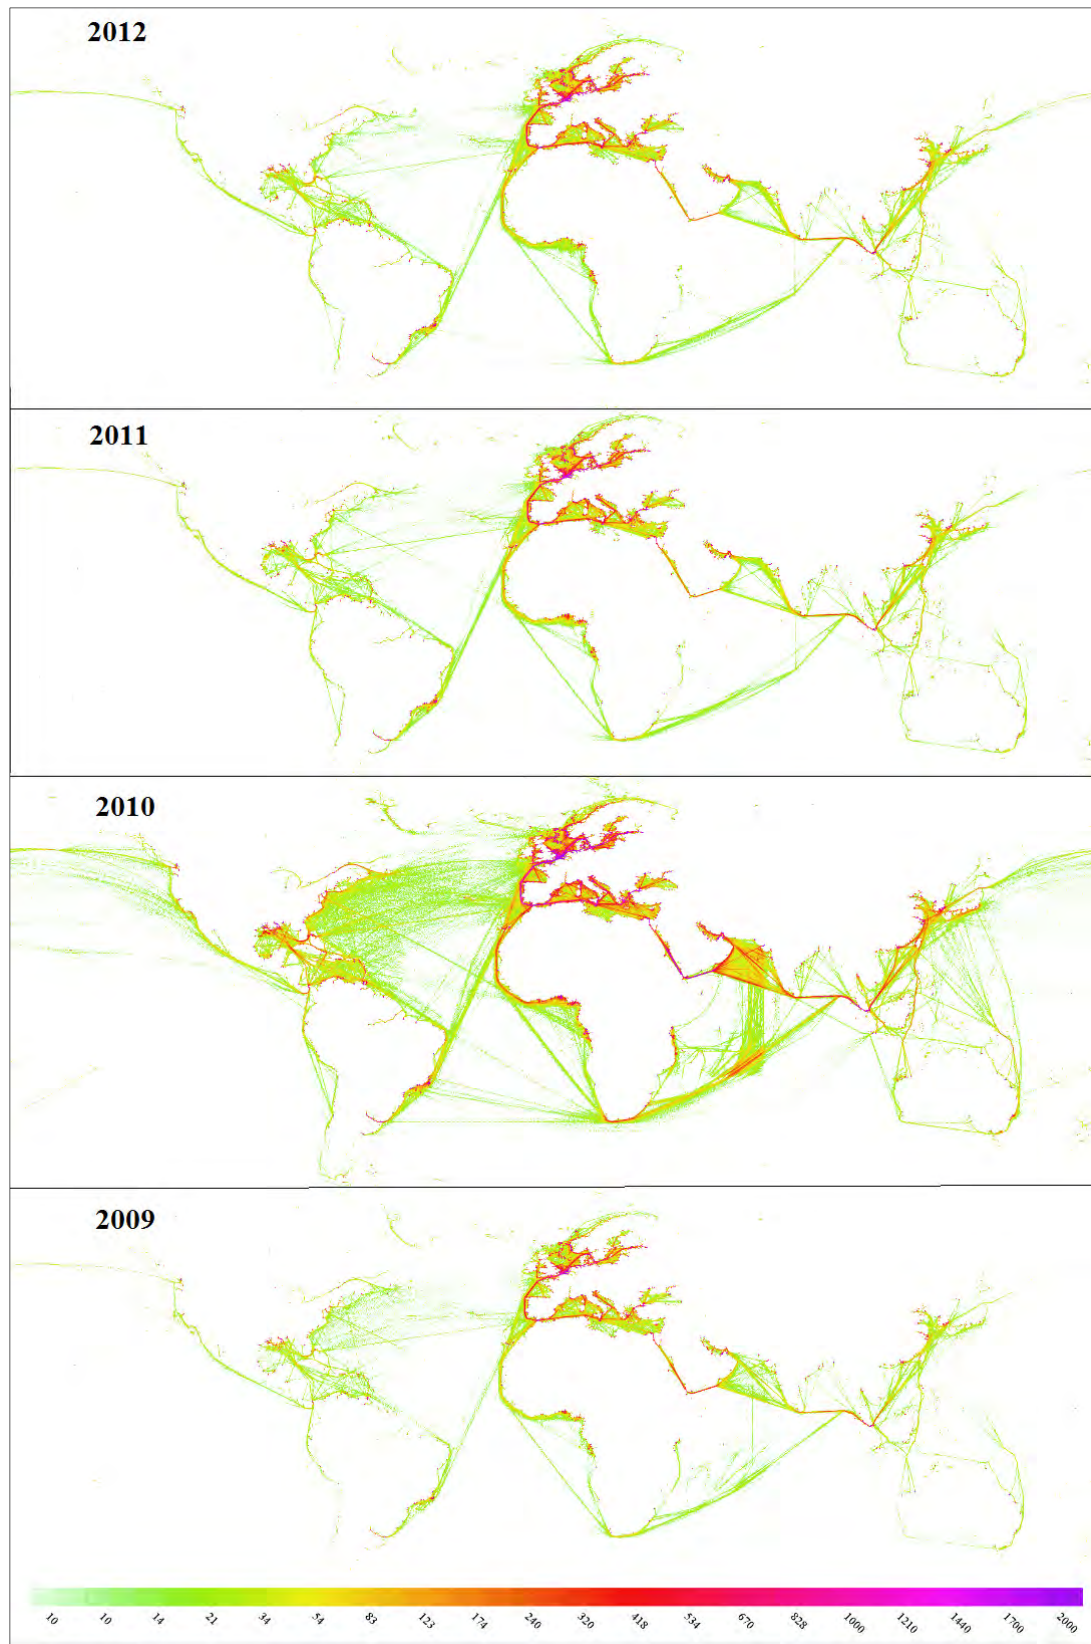


Figure 12: Geographical distribution of LRIT-messages processed by the Pre-processor for 2009 – 2012. Unit: total amount of messages per grid cell with an area of 0.2 x 0.2 degrees.

Further examination of specific regions can be found in Figure 13, which shows the average volume of AIS activity reports for a region reported by a VLCC. Note it is not the volume of reports that is important but the change in the volume, as one would

expect the volume of messages to vary across regions. It is also important to note that the regions that ships call at varies year to year but any bias is assumed to be removed through the sample size selection and the ship categories selected.

The reduction in the Persian Gulf and Singapore Strait regions following 2009 is due to the change in dataset from IHS to other terrestrial datasets. Notwithstanding this reduction, the coverage remains significant, but for some coastal regions, 2010 has the poorest coverage. However, this improves significantly in 2011. For ocean regions, the coverage dramatically improves from 2010 onwards.

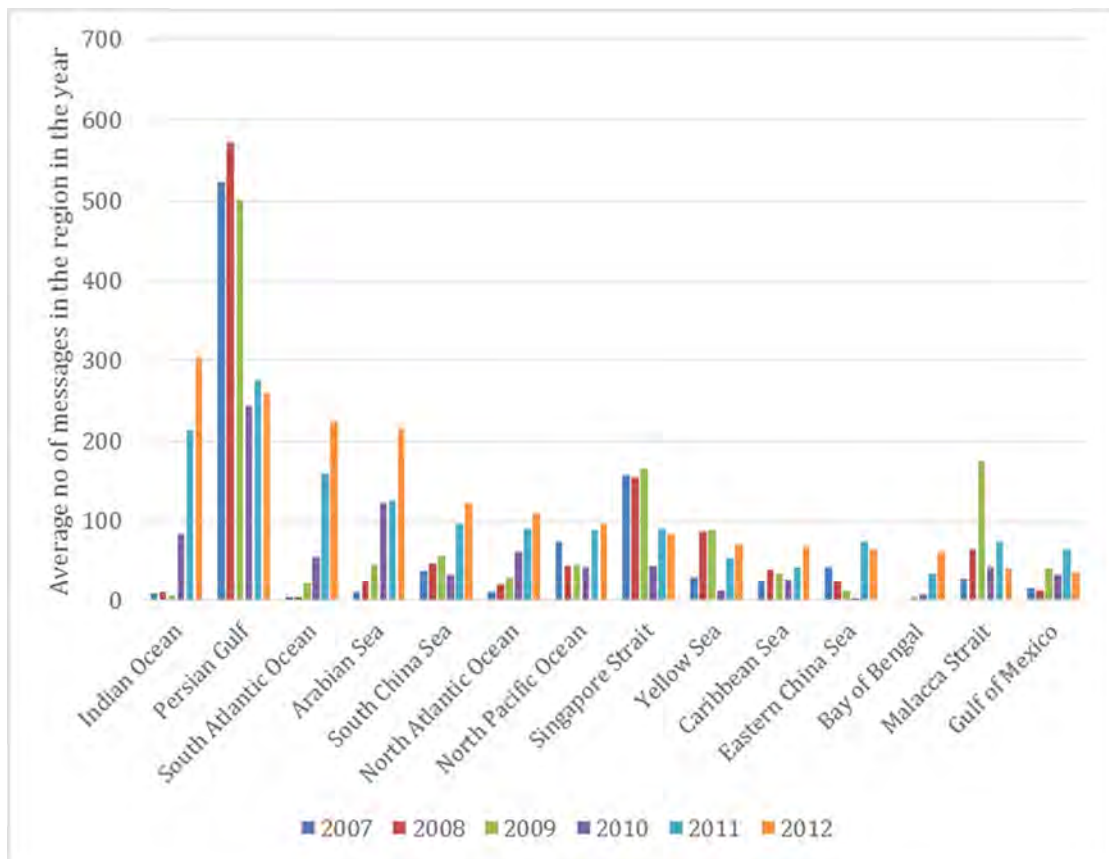


Figure 13: The average volume of AIS activity reports for a region reported by a ship for up to 300 randomly selected VLCC's from 2007 to 2012.

Figure 14 shows a similar plot but in this instance is focused on the largest bulk carrier category. It shows a consistent message to the previous figure with consistent coverage around China and highly improved coverage in ocean areas over time.

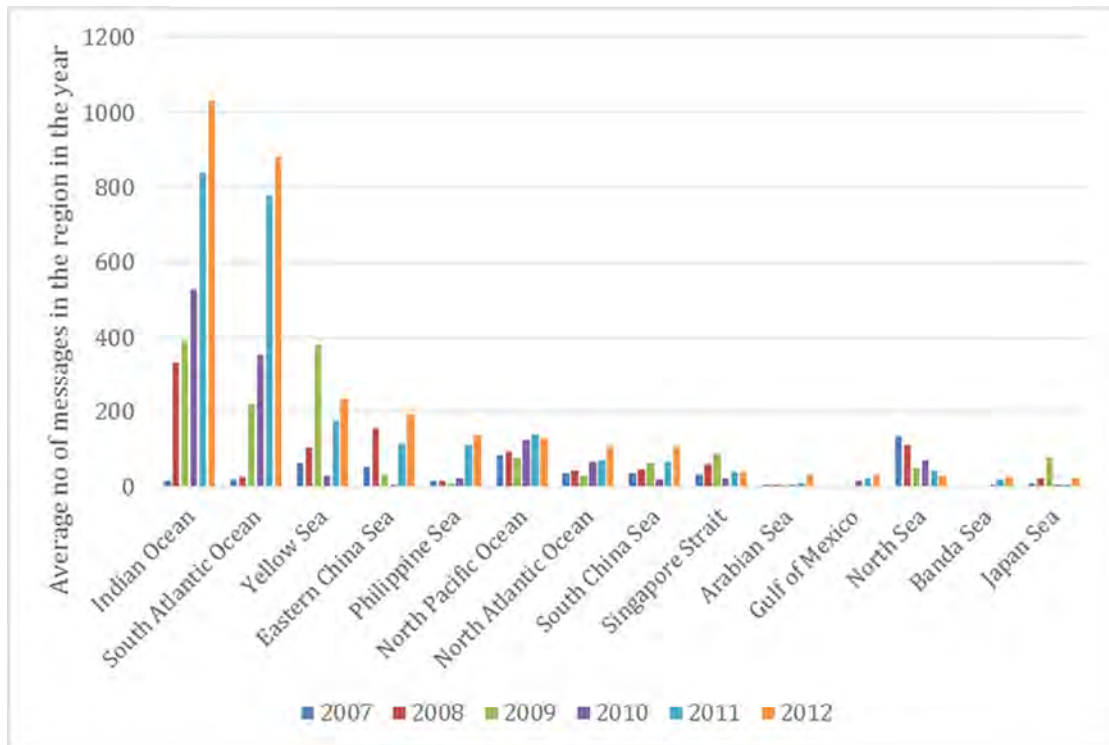


Figure 14: The average volume of AIS activity reports for a region reported by a ship for up to 300 randomly selected capesize bulk carriers from 2007 to 2012.

In summary, the coverage of AIS in 2011 and 2012 can be considered to be very rich. There are no areas identified in this analysis for which there is no coverage available, although the volume of reports in some areas has decreased with a drop in coverage in some coastal regions from 2009 to 2010, but this greatly improves in following years.

### Activity estimates temporal coverage QA/QC

To test and verify the number of days at sea and the speed profiles derived from the AIS data, results are compared to LRIT data. LRIT data complements AIS data by providing an independent data source against which the quality of the AIS data can be tested. Under LRIT, ships must send position reports to their flag administration at least four times a day, or every six hours. The transmission process is different to that of AIS so that LRIT is not subject to the same constraints that can limit the AIS coverage. In particular, recording of AIS messages depends on the ship being located in the field of view of either a land- or a space-based AIS-receiver and the successful reception of the message by that receiver. LRIT messages are not recorded by the same receivers and the coverage by LRIT is therefore largely independent from coverage by AIS data.


The datasets hold LRIT messages from 6441 distinct ships in 2009, from 8716 ships in 2010, 8127 in 2011, and 8838 in 2012 (see Table 5). If four position reports per day are considered full coverage, this would correspond to 1460 messages (1464 in 2012) per year per ship. Table 11 shows the mean number of LRIT reports per ship. In 2010-12, most ships come close, with more than four reports per day from very few ships and with fewer than four reports per day from some ships. In 2009, there are fewer reports per ship as LRIT was still coming into operation during that year. There are different reasons why there may be fewer than 1460 (1464) reports per year from a ship. For example, some reports might be lost and, of course, ships entering into service in a given year would not have the full number of reports in that year. It could also be the case that ships are laid-up and inactive for some part of the

year, and the LRIT signal is only transmitted at times when the ship is active / in-service.

**Table 11: Mean number of messages by ship for LRIT ships used in the analysis.**

|                             | 2012 | 2011 | 2010 | 2009 |
|-----------------------------|------|------|------|------|
| <b>Mean No. of messages</b> | 1194 | 1161 | 1118 | 342  |

In summary, the data do not fulfill the assumption of four reports per day exactly. But for the most part, the assumption that there is one LRIT position report every six hours per ship found in the data is met reasonably well. To quantify the latter point, the fraction of time intervals between consecutive LRIT messages that are in the range from five to seven hours is shown for each ship category in Figure 15. So the majority of LRIT reports are recorded at a frequency of about one every six hours, with most consistency in 2012.

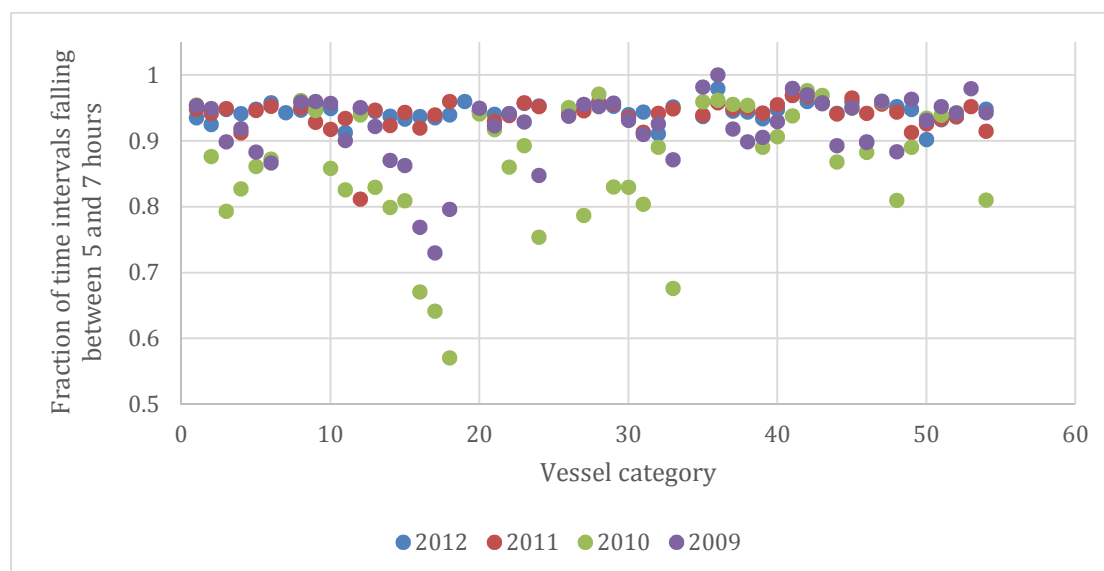

**Figure 15: fraction of time intervals between consecutive messages that fall between 5 and 7 hours for each ship type and size category.<sup>1</sup>**

The key point is that the coverage of LRIT position reports is largely independent from the coverage of AIS reports. Therefore, the LRIT data can shed light on the validity or otherwise of the days at sea and speed profiles estimated from extrapolated AIS data.

The LRIT data contain six parameters: a unique ship identification number Ref\_ID (generated in the merging and anonymisation process with fleet technical data), a time stamp, speed, draught, region, and organization source id. In this section, Ref\_ID, time, and speed are the only variables used. The original, raw LRIT data contain geographic location. That information has been stripped out of the data used for this report and replaced with the speed that is calculated as the great circle distance between the geographic locations given in the respective LRIT report and in

<sup>1</sup> 1-6 bulk carrier, 7 combination carrier, 8-11 chemical Tanker, 12-19 container, 20-22 general cargo, 23-25 liquefied gas tanker, 26-33 oil tanker, 34 other liquids tanker, 35-36 ferry-pax only, 37-41 cruise, 42-43 ferry-ropax, 44 refrigerated cargo, 45-46 ro-ro, 47-48 vehicle, 49 yacht, 50 service - tug, 51 miscellaneous - fishing, 52 offshore, 53 miscellaneous - other, 54 service - other

the consecutive one, divided by the time difference between the reports. For a ship travelling at constant speed over the open oceans, the resulting speed value is accurate. For a ship that changes its course within the time interval between consecutive position reports, its speed is underestimated.

In order to compare ship activity estimated from AIS and LRIT data, respectively, the ships appearing in the LRIT data are matched to the AIS data and to entries in the ship fleet database, from which the ship category to which they belong is determined. Table 12 shows how many of the ships identified in the LRIT data are also found in both the AIS data and the ship database.

**Table 12: AIS to LRIT ship mapping.**


|  | 2009 | 2010 | 2011 | 2012 |
|--|------|------|------|------|
| LRIT Ships   | 6441 | 8716 | 8127 | 8838 |
| LRIT Ships matched to AIS                          | 6402 | 8640 | 7261 | 8776 |
| 3-way matches (LRIT, AIS, and IHS ship parameters) | 5283 | 8562 | 7261 | 7322 |

Every LRIT report is labelled 'at sea' if the stored speed value is greater or equal 3.0 knots. If the speed value is below 3.0 knots, the LRIT report is labelled 'in port'. The same criteria are applied to the corresponding AIS data. The AIS data are in the format of hourly messages that include a reliability flag, set to 1 if the AIS data at that time are 'reliable' and to 0 if they rely more heavily on the extrapolation algorithm. To investigate any bias that may be introduced by accounting for the cases of low AIS coverage, time spent at sea according to the LRIT data is compared to time spent at sea according to AIS data, for ships that are more or less well observed in the AIS data. To this end, for each ship in each year, the parameter AIS-coverage is defined as the ratio of AIS messages with reliability=1 to all AIS messages.

The plots in Figure 16, show the comparisons over each year for the estimates of days at sea. Perfect agreement would result in a value of 0 for the mean difference in days at sea. For 2010 to 2012, with good AIS coverage, we see convergence between LRIT and AIS days at sea, with a slightly higher value for AIS. However, in each year, as the AIS coverage deteriorates, it underestimates the number of days at sea, compared to LRIT for all years.


For the comparison in 2009, it should be noted that the extrapolation algorithm applies a correction factor to the AIS data in order to attempt to correct for the expectation of bias when shore-based AIS data is used. For the comparison shown in Figure 16, the correction factor used is derived from the days at sea reported in the IMO GHG Study 2009 for the year 2007. The poor quality observed in that comparison, showing that the AIS derived days at sea consistently overestimates days at sea relative to the LRIT data, reflects the inadequacy of the assumption that IMO GHG Study 2009 data (for 2007) is representative of the activity of shipping in 2009. Whether this is because the IMO GHG Study 2009 data is inaccurate, or cannot be assumed approximately constant over the period 2007-2009, cannot be identified. However, following observation of the poor quality of the starting assumption, the assumptions were revised and the extrapolation algorithm uses the LRIT data to calibrate observed days at sea in 2009 rather than the IMO GHG Study 2009 data and this definition is provided in Annex 1. This assumption is tested in the uncertainty section to determine the effect on final results.



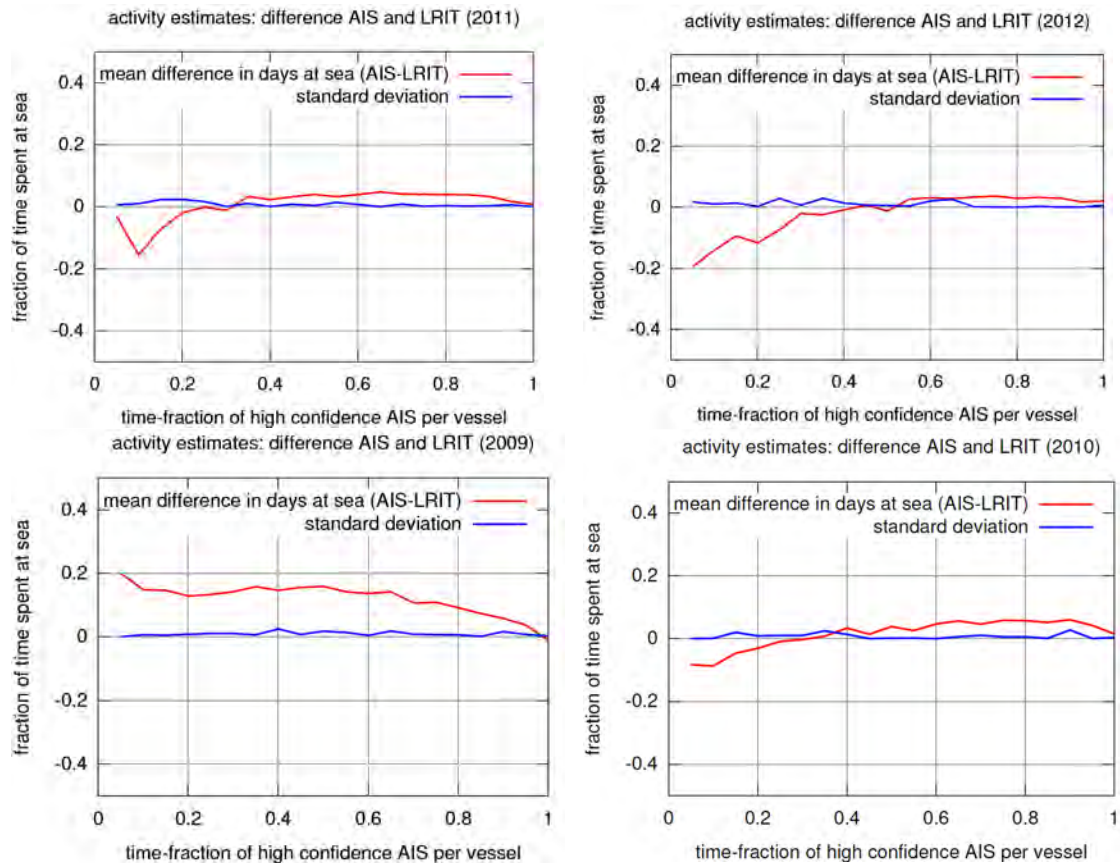


**Figure 16: Plots of difference in fraction of time spent at sea for all ships with increasing high confidence AIS count over the year. For each ship in one of these 5%-wide bins, the difference between fraction of time at sea between AIS and LRIT is calculated. The mean of this difference per bin is plotted (red). And the standard deviation of the difference values in each bin is plotted (blue).**

Speed is also compared from AIS derived estimates to the LRIT estimates. During the processing and extrapolating of AIS, the AIS is resampled to hourly bins. This introduces uncertainty into the estimate of the speed of the ship as the ship speed is not constant throughout the hour. To highlight this uncertainty, Figure 17 shows the distribution of the difference between reported speed and resampled speed for a ship travelling at its average speed.

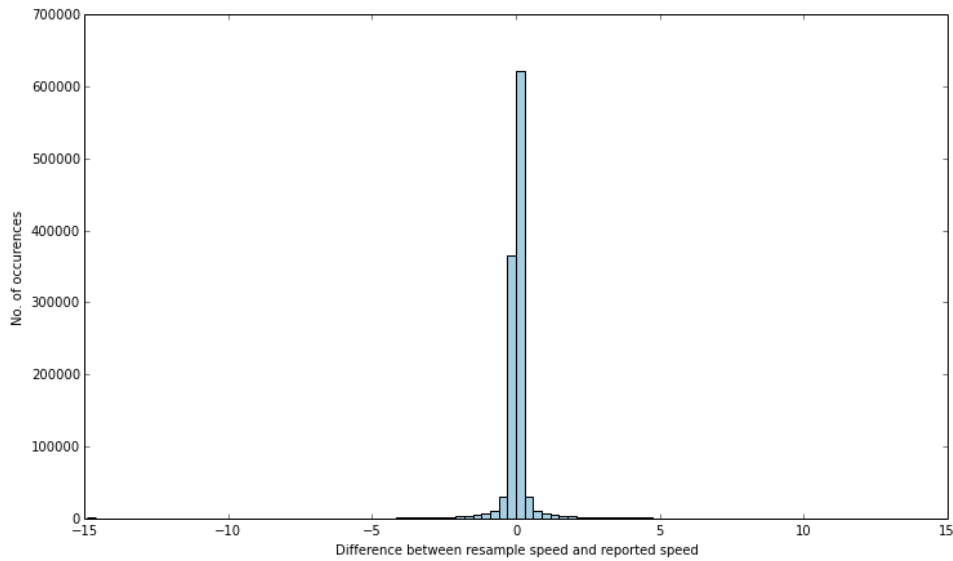

**Figure 17: Distribution of difference between resampled hourly speeds and the reported speed within the hour sampled across 10 VLCCs in 2011. The standard deviation was calculated as 0.75nm/hr.**


Similarly, Figure 18 shows the distribution of speed change for a time difference of two hours.

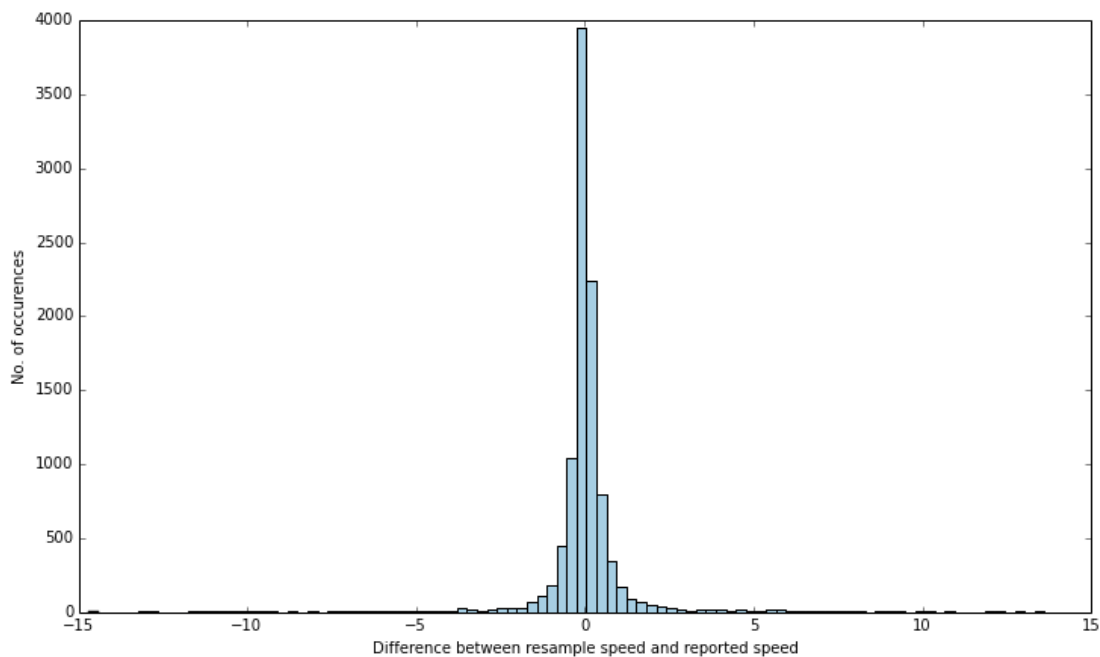

**Figure 18: Distribution of difference between reported speeds when the time difference in reporting is between 2hours (sampled as message from 105 mins to 120 mins from the original message) for all VLCC ships captured in AIS. The standard deviation of the sample was 1.85nm/hr.**

Figure 19 shows the comparison of LRIT speed and AIS derived mean speed at sea for each ship category. In most cases and years, AIS derived speed is higher than that provided by LRIT. This is not unsurprising as the LRIT speed is calculated from shortest path between points, which is not necessarily the route the ship will have taken. Moreover, there will most likely be bias towards reported shore-side speeds, which are typically lower. The extreme outliers occur when there is a low count of LRIT messages for ships within a type and size category. Notwithstanding the extreme outliers, there is generally good agreement between the speed estimates. From 2009 to 2012 the number of categories where the difference in mean category

speed is less than 1 is 19, 34, 33 and 37 respectively. The differences observed in 2009 are attributable to the fact that there is no satellite derived activity data in this year.

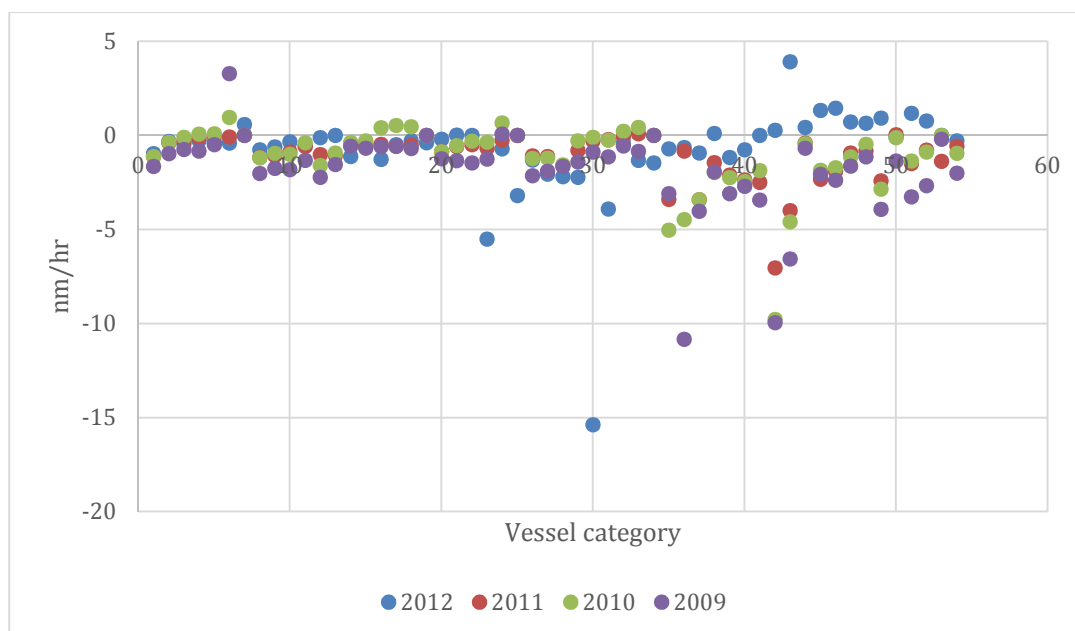

**Figure 19: Difference between average speed at sea for each ship size and type category. Negative values indicate that LRIT provides a lower estimate of speed than the extrapolated AIS.**

In summary, there is good confidence about the days at sea and speeds estimates for 2010 to 2012, both regarding a lack of bias and convergence in estimates of these variables when there is high confidence in the AIS extrapolation. However, for 2009 and for low confidence AIS extrapolation estimates (less than 40%), bias is evident tending to increase the days at sea percentage.

### Fleet technical data quality

Evaluating the technical fields from 2007 through 2012 used for estimating ship emissions, the fields with over 99% coverage over the study timeframe include: Statcode3, Statcode5, gross tonnage (gt), propulsion type, number of screws, and date of build. The fields with the poorest coverage (under 50%) over the study timeframe include: length, main engine (ME) fuel consumption, and total fuel consumption. It should be noted that the IHSF database did not include keel laid date until 2012. A qualitative field quality was initially assigned based on consortium members' evaluation/use of fields in previous projects and input from IHS Marine. The qualitative designations include representative and speculative. Representative designates that based on previous work with this field on other projects the field is generally found to be representative of the actual ship characteristic and reliably reported across numerous ships. Speculative designates that based on previous work with this field on other projects the field is generally found to be inconsistent of the actual ship characteristic and/or not reliably reported across numerous ships. Again, at this time the quality designations are based on past experience and judgment of the consortium for a particular field, with input from IHS Marine.

A comparison was conducted for the 2007 through 2012 observed cargo-carrying ships (identified with AIS and satellite AIS activity), which showed improvements in the coverage several of the fields. Fields in which coverage is improving are beam and RPM, while dwt, max draught, ship speed, and ME installed power had similar coverage across the study timeframe. The coverage of the cargo-carrying fleet with respect to the various fields utilized for this study are presented in Table 13.

**Table 13: Analysis of 2011 & 2012 Observed Cargo Carrying Fleet.**

| Field              | % IHSF Coverage |       |       |       |       |       | Qualitative Field Quality |
|--------------------|-----------------|-------|-------|-------|-------|-------|---------------------------|
|                    | 2007            | 2008  | 2009  | 2010  | 2011  | 2012  |                           |
| Statcode3          | 100%            | 100%  | 100%  | 100%  | 100%  | 100%  | Representative            |
| Statcode5          | 100%            | 100%  | 100%  | 100%  | 100%  | 100%  | Representative            |
| gt                 | 100%            | 100%  | 100%  | 100%  | 100%  | 100%  | Representative            |
| dwt                | 99.1%           | 98.9% | 98.7% | 98.3% | 98.0% | 98.1% | Representative            |
| length             | 30.5%           | 31.9% | 38.9% | 40.6% | 39.7% | 43.2% | Speculative               |
| beam               | 77.6%           | 79.8% | 86.6% | 86.6% | 88.9% | 93.5% | Speculative               |
| max draught        | 99.0%           | 98.7% | 98.7% | 98.6% | 98.3% | 98.5% | Representative            |
| ship speed         | 90.2%           | 88.1% | 89.1% | 89.6% | 87.7% | 93.3% | Representative            |
| installed ME power | 99.3%           | 99.2% | 99.3% | 99.4% | 99.0% | 99.1% | Representative            |
| RPM                | 55.6%           | 61.9% | 79.9% | 90.0% | 90.3% | 91.6% | Speculative               |
| ME consumption     | 35.0%           | 32.9% | 31.0% | 28.8% | 27.1% | 24.7% | Speculative               |
| total consumption  | 33.0%           | 31.0% | 28.9% | 26.5% | 24.8% | 22.3% | Speculative               |
| propulsion type    | 100%            | 100%  | 100%  | 100%  | 100%  | 99.1% | Representative            |
| number of screws   | 100%            | 100%  | 100%  | 100%  | 100%  | 100%  | Representative            |
| date of build      | 100%            | 100%  | 100%  | 100%  | 100%  | 100%  | Representative            |
| keel laid date     | na              | na    | na    | na    | na    | 91.9% | Representative            |

An evaluation of the cargo capacity fields was also conducted for the 2011 and 2012 IHSF datasets. TEU capacity coverage for the container sub class was nearly 100% for both years, but reefer slot capacity coverage was less than 1% in both years. There was 100% coverage for cbm capacity for the liquefied gas carrier sub class in both years. There was over 90% coverage for vehicle capacity for auto carriers (pure car carriers) in both years, but there was less than 55% coverage for vehicle capacity for all the rest of the ro-ro cargo sub class.

## Noon report data for activity and fuel consumption quality assurance

### Description of noon report data

Noon reports are records kept by the crew of a ship with the information used for a variety of management processes both onboard and assure. There is no standard report format, but most operators collect very similar data, and in most cases the reporting frequency (every day at noon when at sea), is the same, in some cases per voyage aggregate data only is available. The data used in this report, and the ship types it includes has been generously donated by the operators listed in Table 14. The composition of the fleets used (number of ships by ship type category) after filtering out ships where noon report coverage over the entire quarter is incomplete, is listed in Table 15. The total number of observations is approximately 60000 day's operation.

**Table 14: List of the operators and their fleets (number of ships) used in this analysis (note that operator names are left blank in this final draft as we await their final review of the presentation of their data, and permission that their name can be included here).**

| Operator        | 2007      | 2008      | 2009      | 2010      | 2011       | 2012       |
|-----------------|-----------|-----------|-----------|-----------|------------|------------|
| Gearbulk        | 0         | 0         | 0         | 0         | 0          | 63         |
| V.Ships         | 2         | 2         | 5         | 11        | 14         | 42         |
| Shell           | 0         | 0         | 0         | 0         | 61         | 0          |
| Carbon Positive | 16        | 18        | 18        | 26        | 46         | 65         |
| <b>Totals</b>   | <b>16</b> | <b>18</b> | <b>23</b> | <b>37</b> | <b>156</b> | <b>168</b> |

**Table 15: List of the ship types (number of ships) used in this analysis.**

| Ship Type            | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 |
|----------------------|------|------|------|------|------|------|
| Bulk Carrier         | 3    | 3    | 6    | 9    | 39   | 52   |
| Chemical Tanker      | 0    | 0    | 3    | 1    | 17   | 1    |
| Container            | 1    | 1    | 0    | 4    | 4    | 10   |
| General Cargo        | 0    | 0    | 0    | 0    | 0    | 57   |
| Liquefied Gas Tanker | 1    | 3    | 2    | 7    | 17   | 10   |
| Oil Tanker           | 11   | 11   | 12   | 16   | 54   | 40   |
| Service – tug        | 0    | 0    | 0    | 0    | 5    | 0    |
| Misc - fishing       | 0    | 0    | 0    | 0    | 2    | 0    |
| Offshore             | 0    | 0    | 0    | 0    | 1    | 0    |

The total number of ships for which data has been collected represents approximately 1% of the total number of ships in the fleet, and approximately 2% of the total fuel consumption of the fleet.

Noon report data contains inherent uncertainties because measurement on board ships is of variable quality depending on the techniques used. Many noon reports (including many of those used in this study) are populated using tank soundings which can have high measurement error (see Aldous et al. 2013). To address this issue, we have discussed quality procedures with the companies from whom the data is collected (many of which have processes in place to assure the quality of the data). Furthermore, we have aggregated the data to quarterly totals (main engine and auxiliary engine fuel consumed, days at sea and in port, and distance travelled) and averages (speed, draught and tonne per day fuel consumption). This process of aggregation controls for the uncertainty in daily observations, providing there is no systemic bias in the reporting of any of the data. Whilst systemic bias (e.g. consistent under-reporting of fuel consumed by the crew) cannot be ruled out, the magnitude of the error that this could create is not considered likely to be large relative to the level of assurance that is sought from these comparisons.

#### **Method for processing noon report data in preparation of comparison against bottom-up model output**

The noon report data for each ship was aggregated per quarter, and summary statistics on activity and fuel consumption were output for comparison with the bottom-up method.

Only ships for which the noon report data is fully populated for a full quarter (+/- 5 days) is suitable for comparison, incomplete quarters are filtered out. Obvious outliers, usually due to human error in the reporting are identified manually and removed.

There are a small number of observations for which ship speed and distance travelled is logged but fuel consumption is not recorded, in this instance the fuel consumption is filled in by conditional mean imputation. That is, fuel consumption is predicted based on information from fully observed variables (ship speed, loading condition and weather) through multiple regressions. Filtering for part days precedes the regression in order to avoid skewness arising from maneuvering/in port operations. If none of the coefficients from the regression are found to be statistically significant then simply the mean 'at sea' fuel consumption for that ship is used. Overall, this approach introduces additional uncertainty in the comparison however since fuel consumption is compared on an aggregate basis this is on balance an improvement. Only a small number of observations are adjusted in this way (approximately 2.3% of all observations).



Where a time and distance travelled is logged but there is no speed recorded then the speed is calculated from these two fields and filled in, this is in 0.3% of observations.



Generally, the noon report fuel consumption fields cover only days at sea so, where EOSP or FAP are not explicitly defined in an 'activities' field (or similar) then port days are calculated when zero monitored fuel consumption coincides with zero speed and distance travelled.

Fuel consumption associated with part days, i.e. on a day when the ship is leaving or arriving in port, is included in the per quarter aggregates, and the hours steaming during part days are included in the time spent 'at sea' totals. However average 'at sea' ship speed is calculated from full days steaming only to ensure that maneuvering activities do not skew the results.

Results of noon report and bottom-up output quality assurance of activity estimate and fuel consumption (all years)


2011

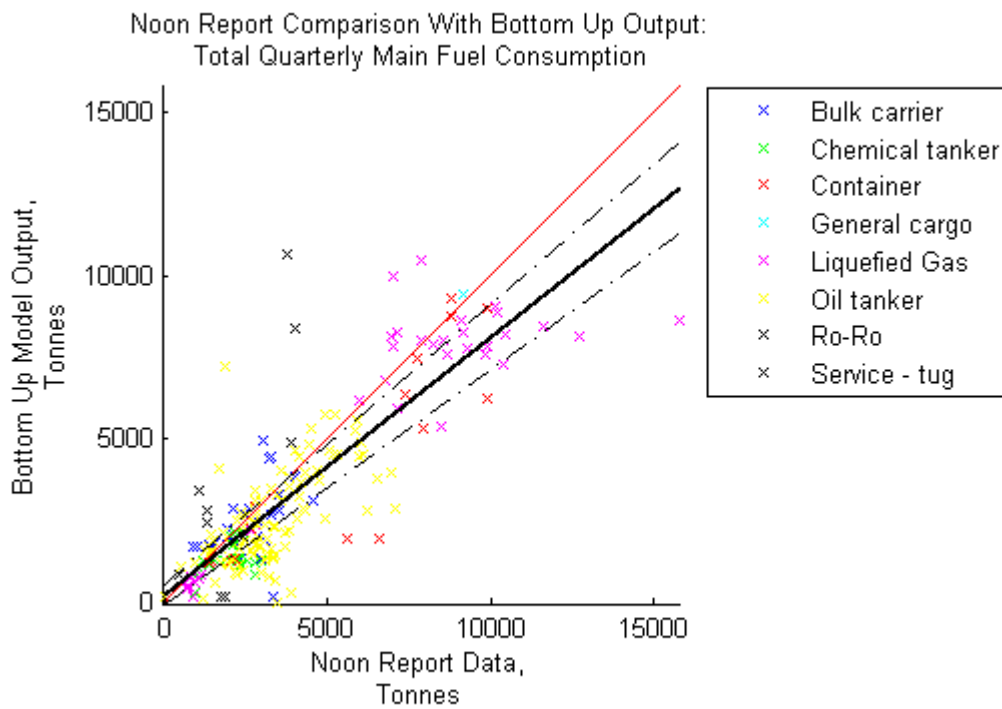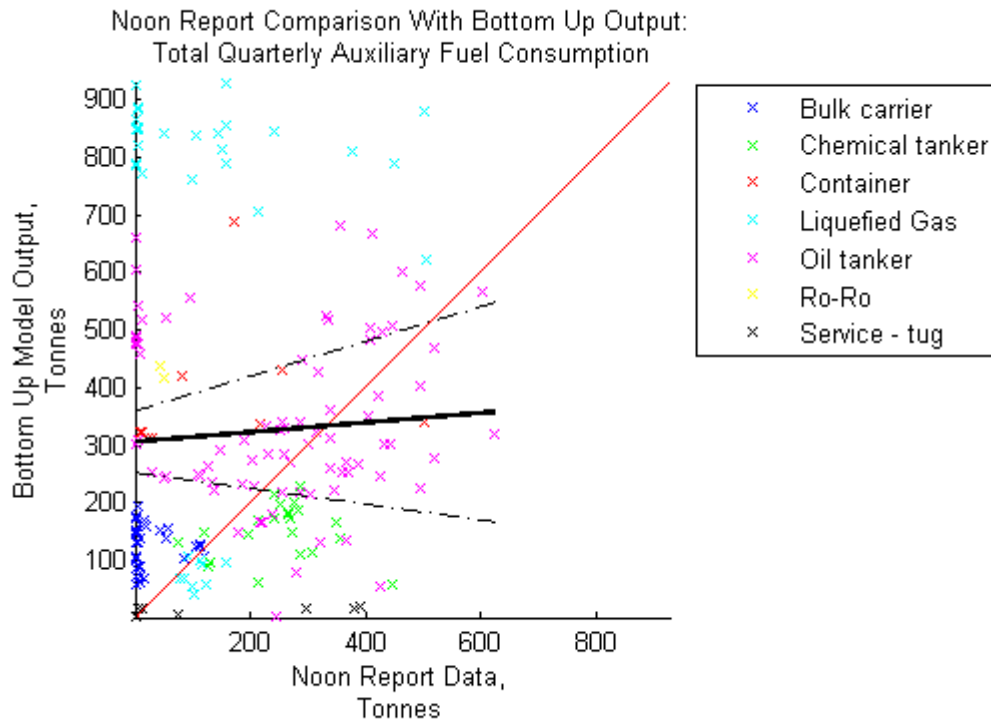

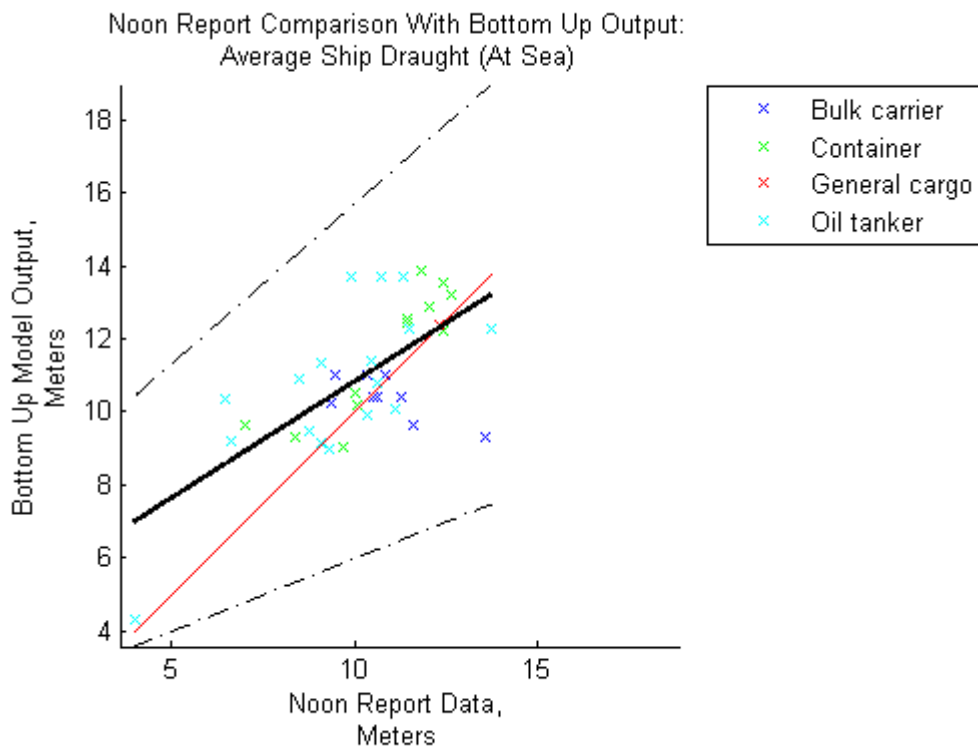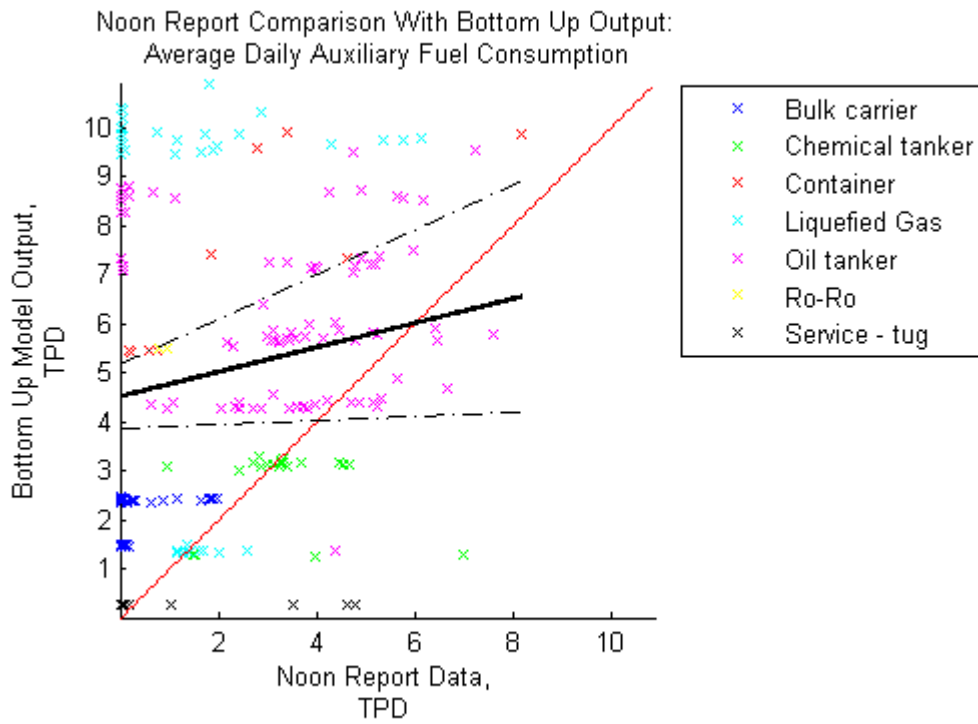








Noon Report Comparison With Bottom Up Output:  
Average Ship Speed (At Sea)


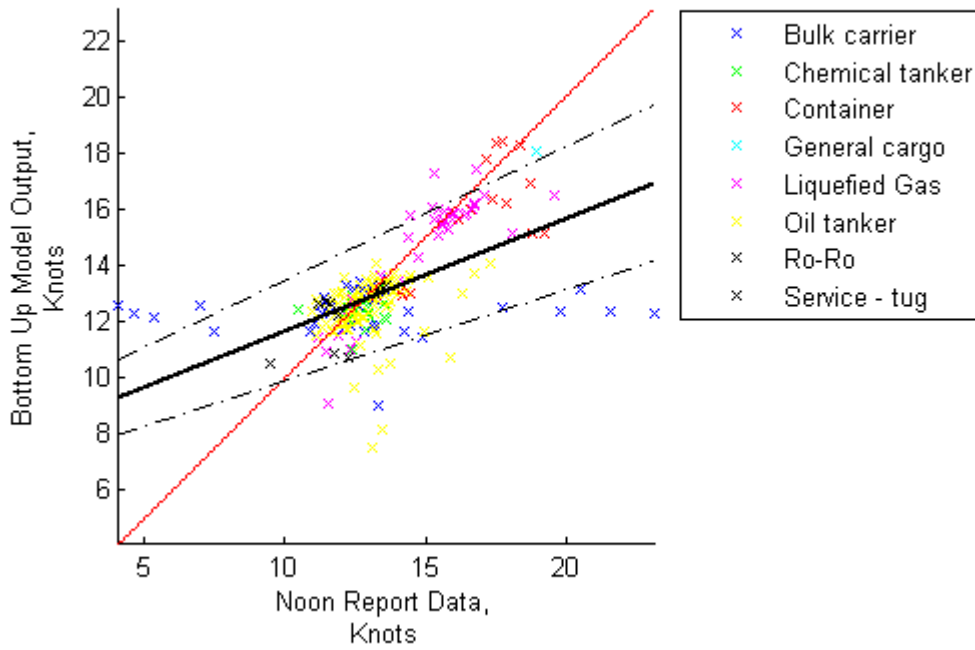


Noon Report Comparison With Bottom Up Output:  
Total Quarterly At Sea Days

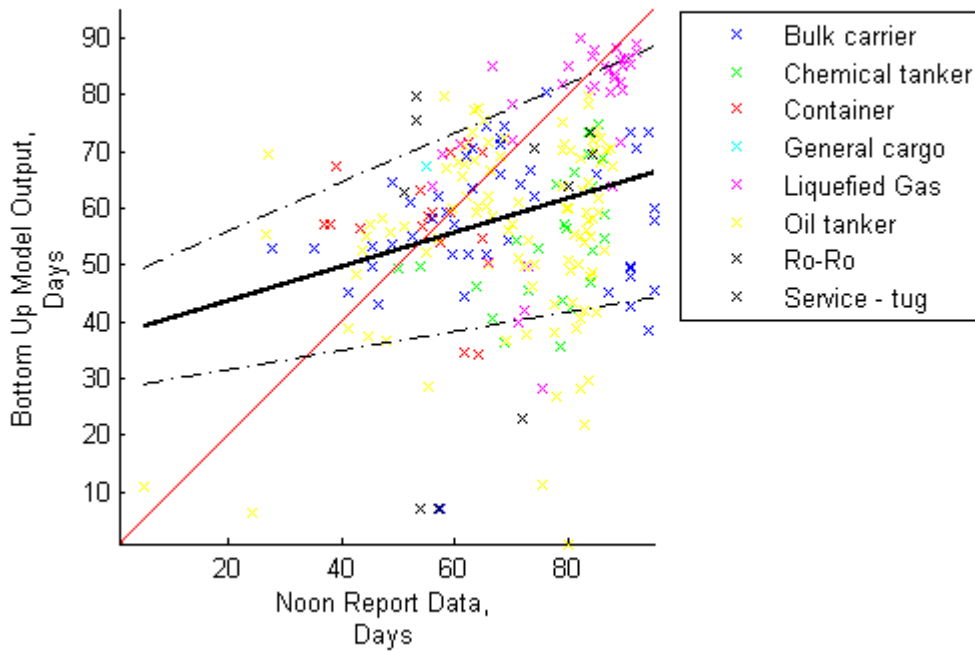


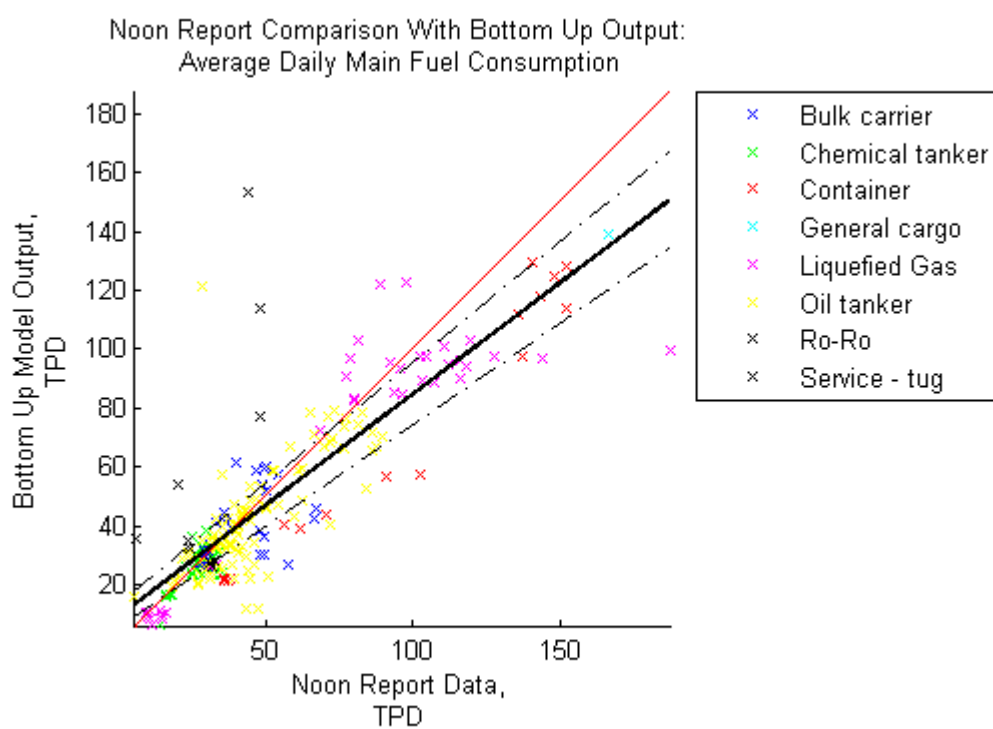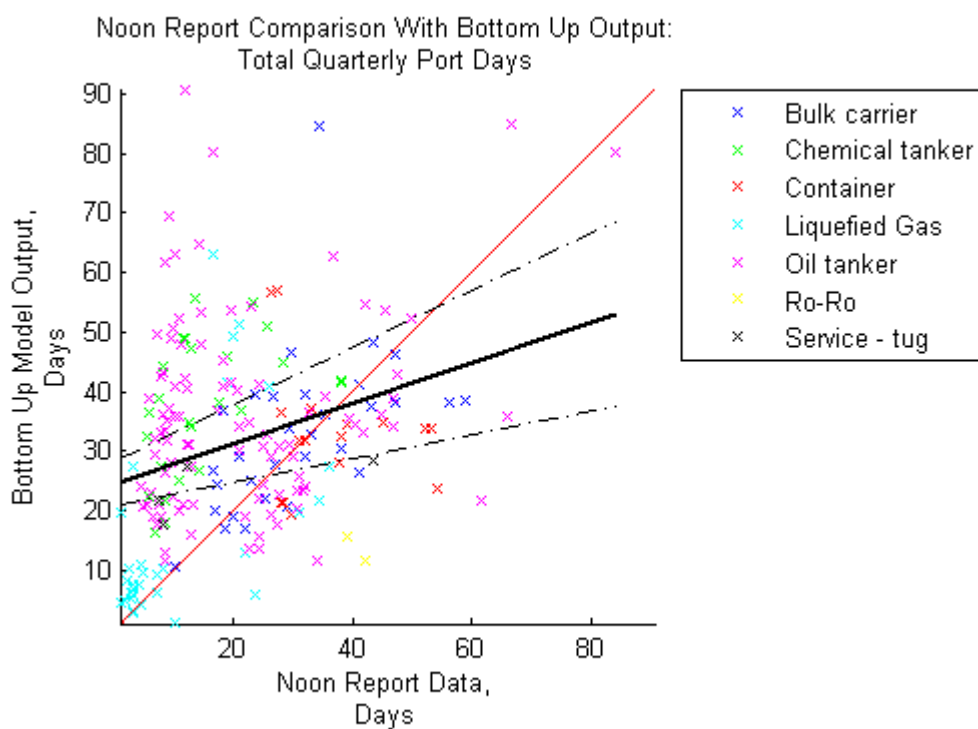

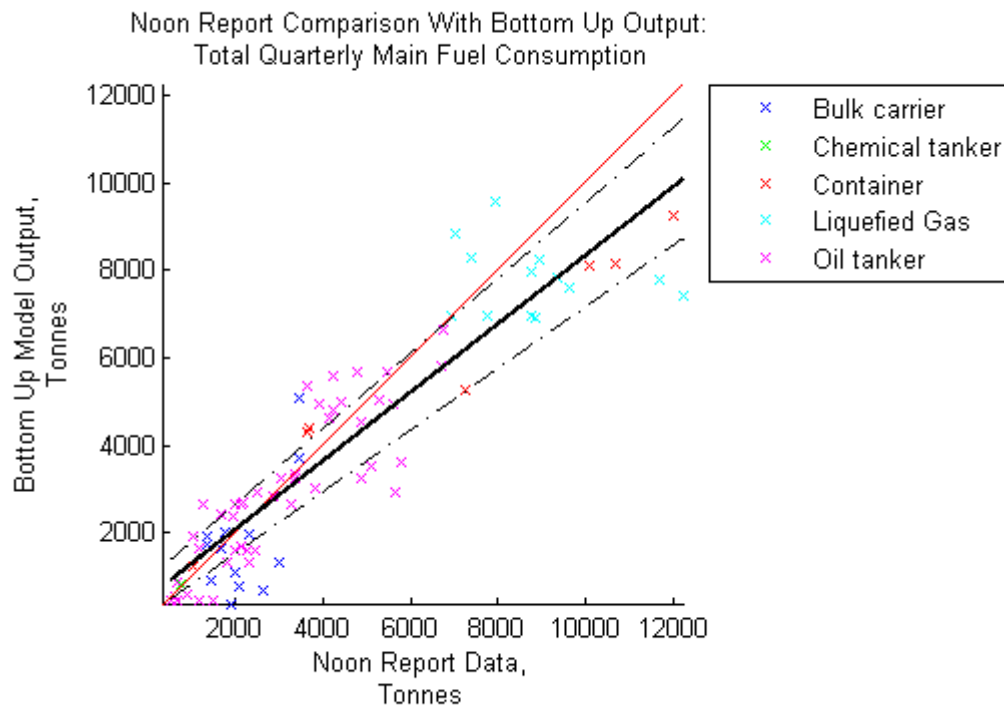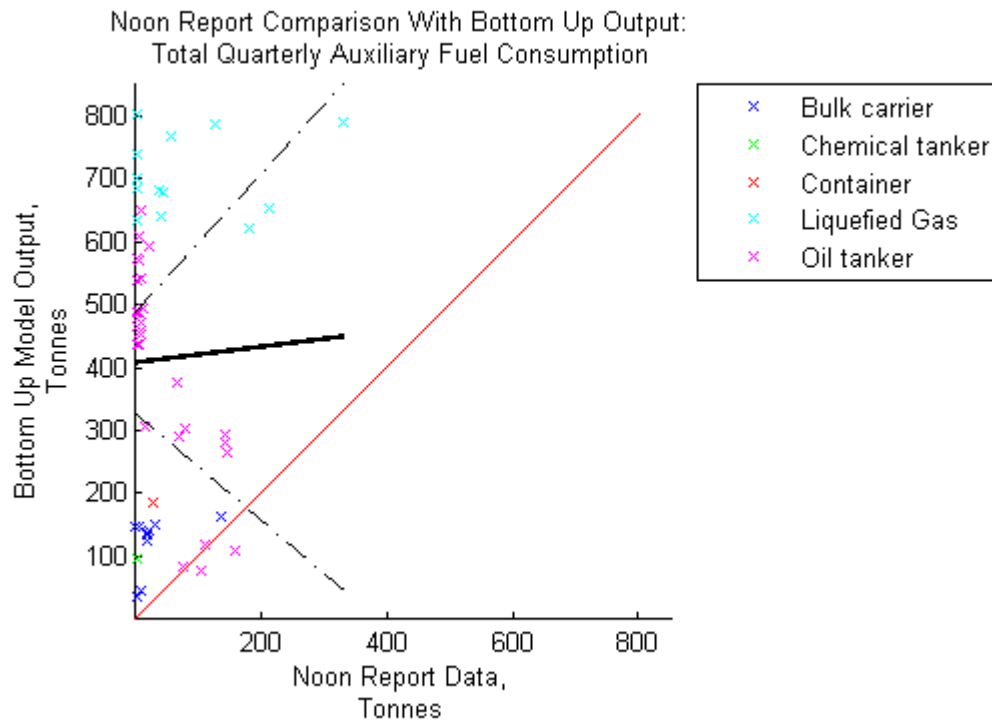


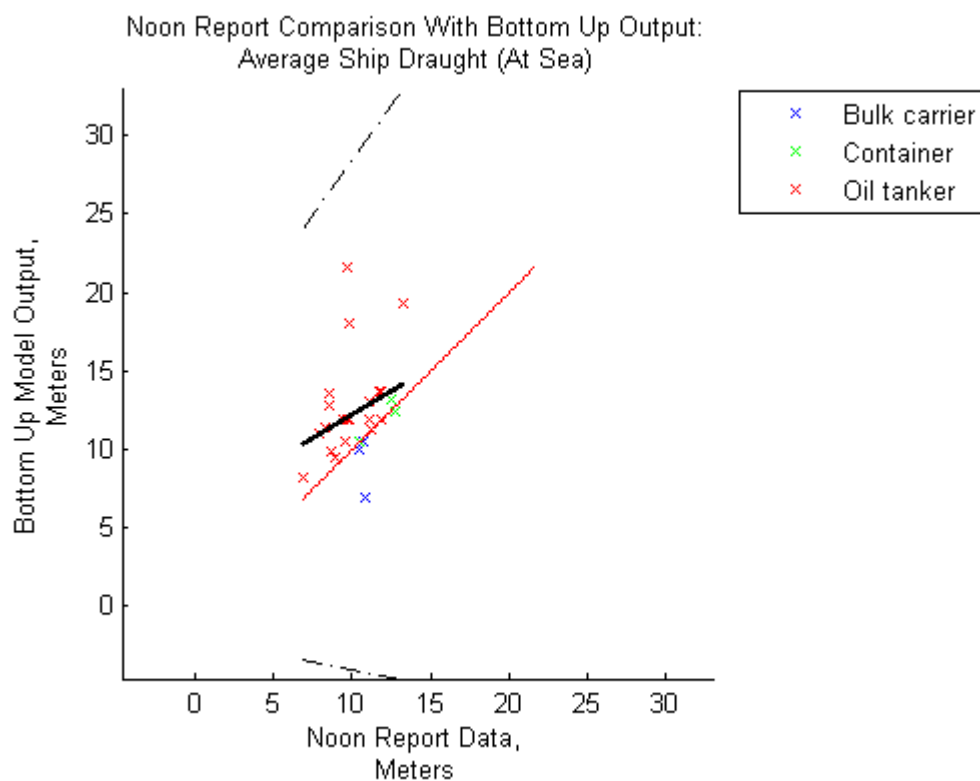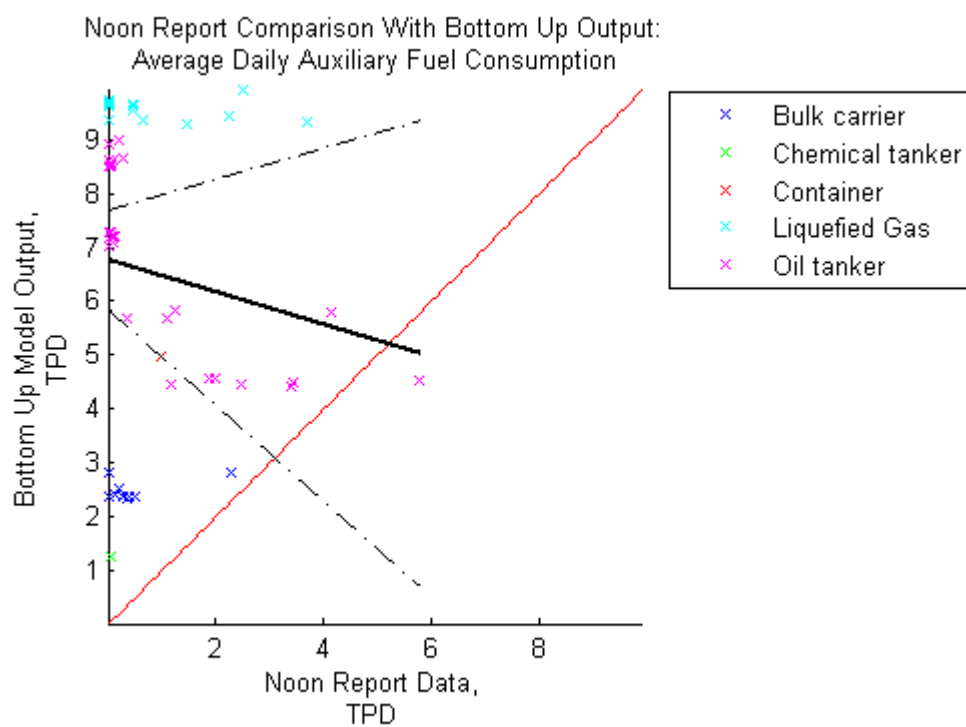


Noon Report Comparison With Bottom Up Output:  
Average Ship Speed (At Sea)

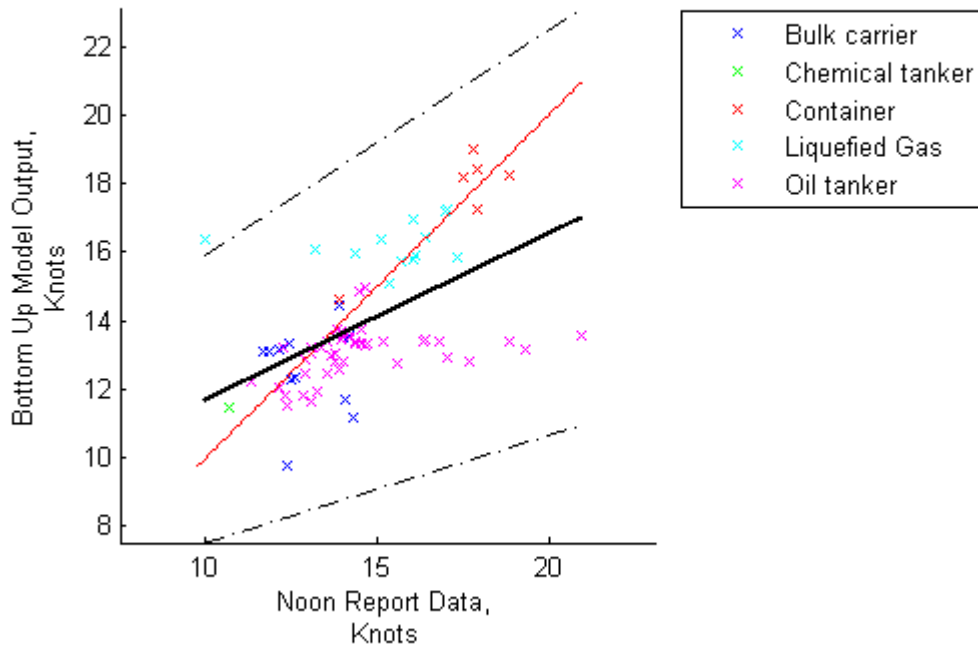


Noon Report Comparison With Bottom Up Output:  
Total Quarterly At Sea Days


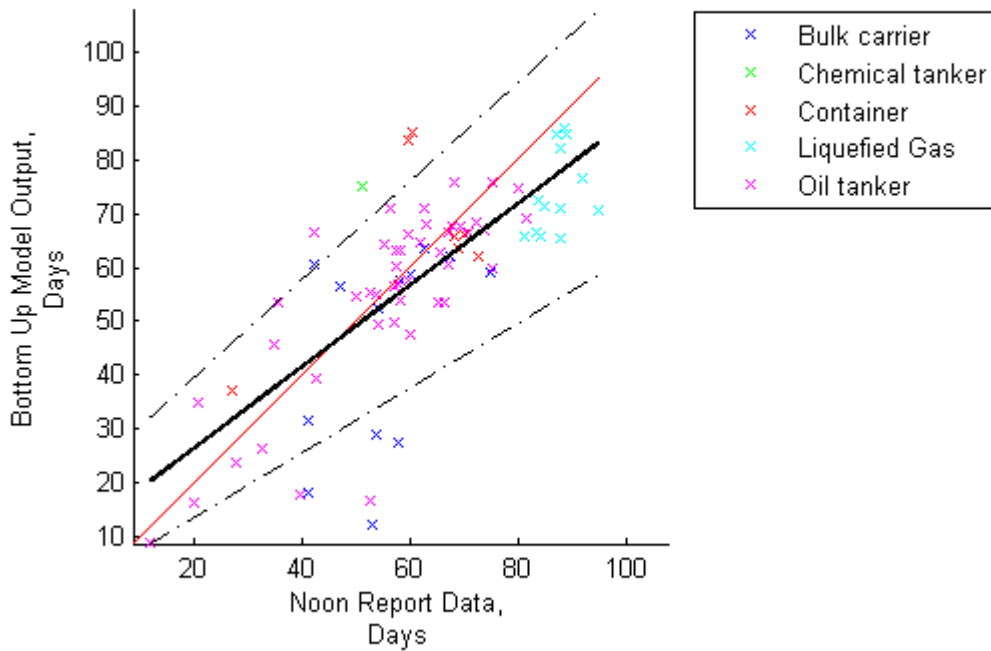


Noon Report Comparison With Bottom Up Output:  
Total Quarterly Port Days

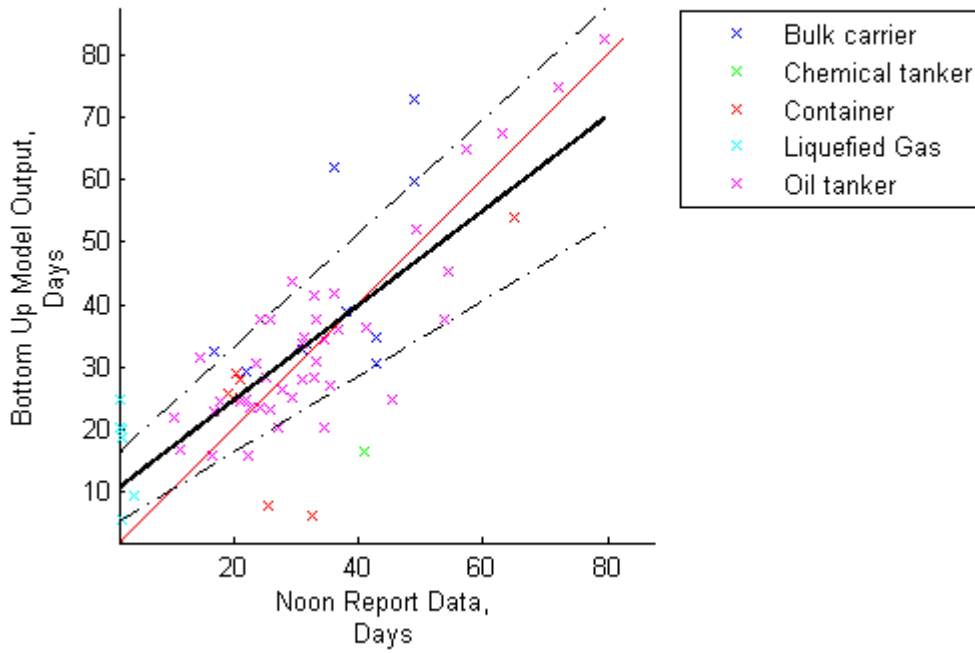

Noon Report Comparison With Bottom Up Output:  
Average Daily Main Fuel Consumption

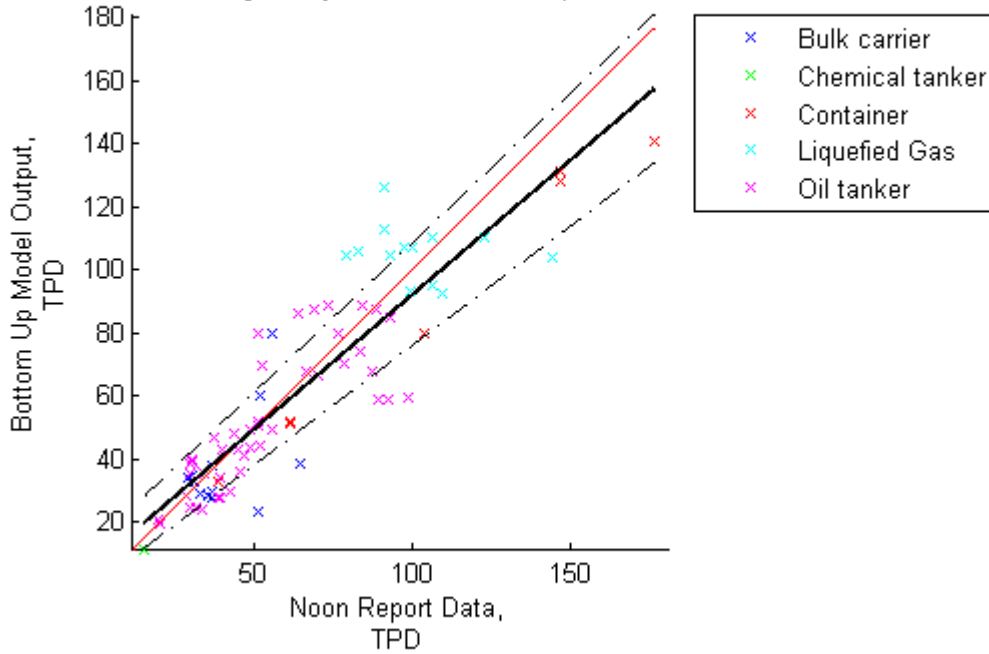


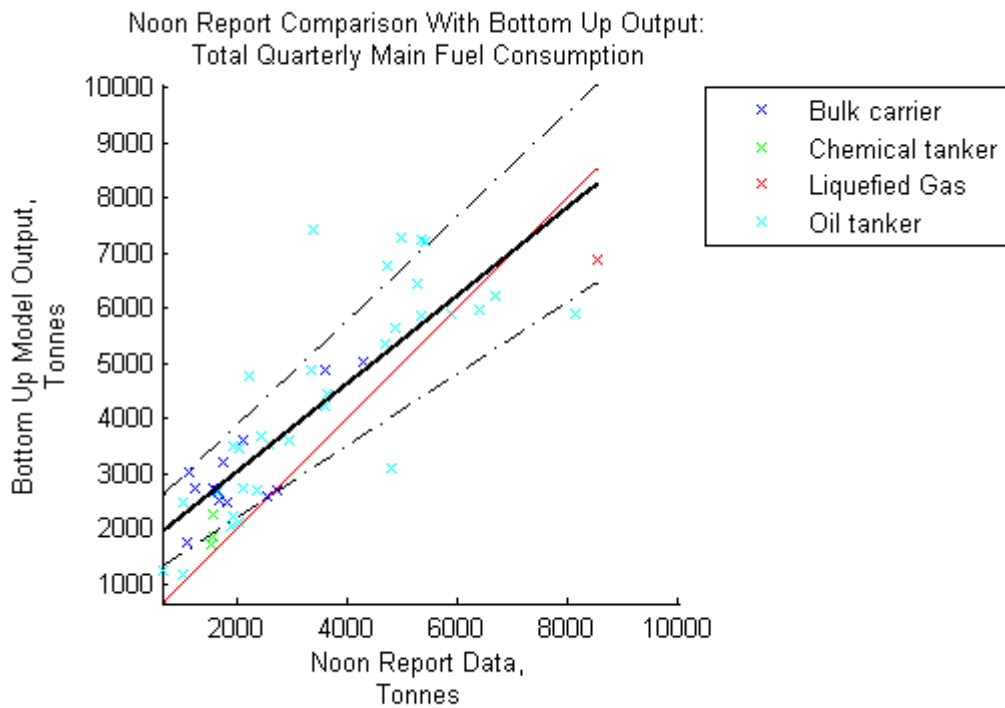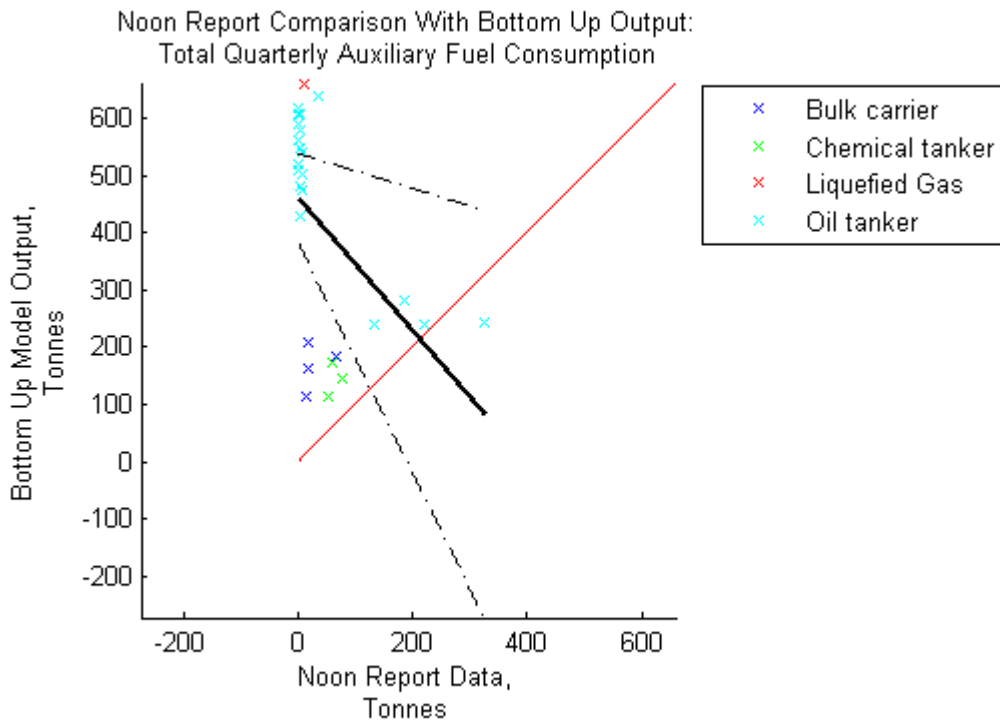










Noon Report Comparison With Bottom Up Output:  
Average Ship Speed (At Sea)


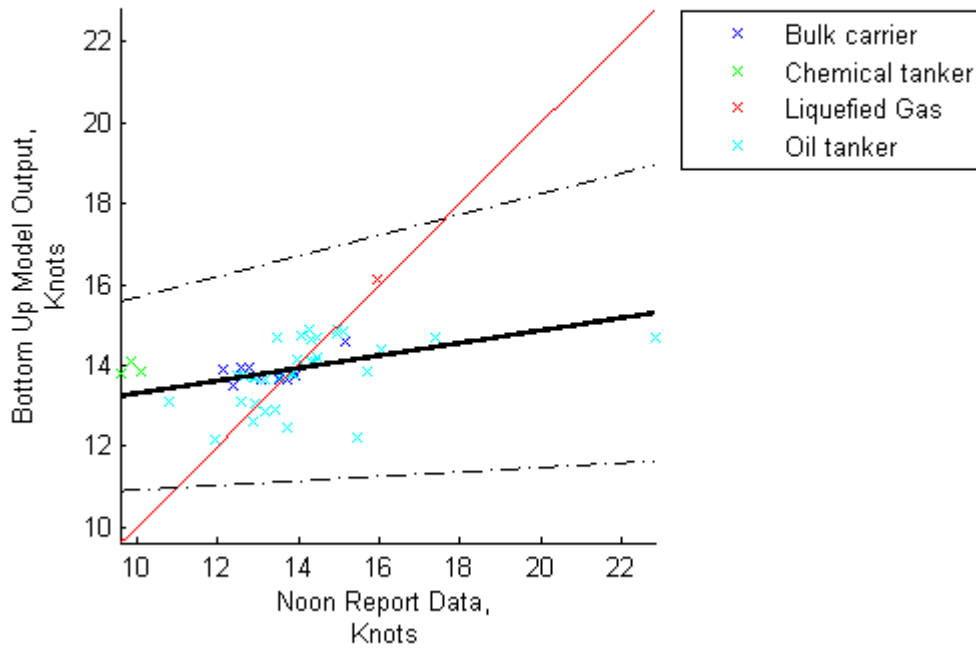




Noon Report Comparison With Bottom Up Output:  
Total Quarterly At Sea Days

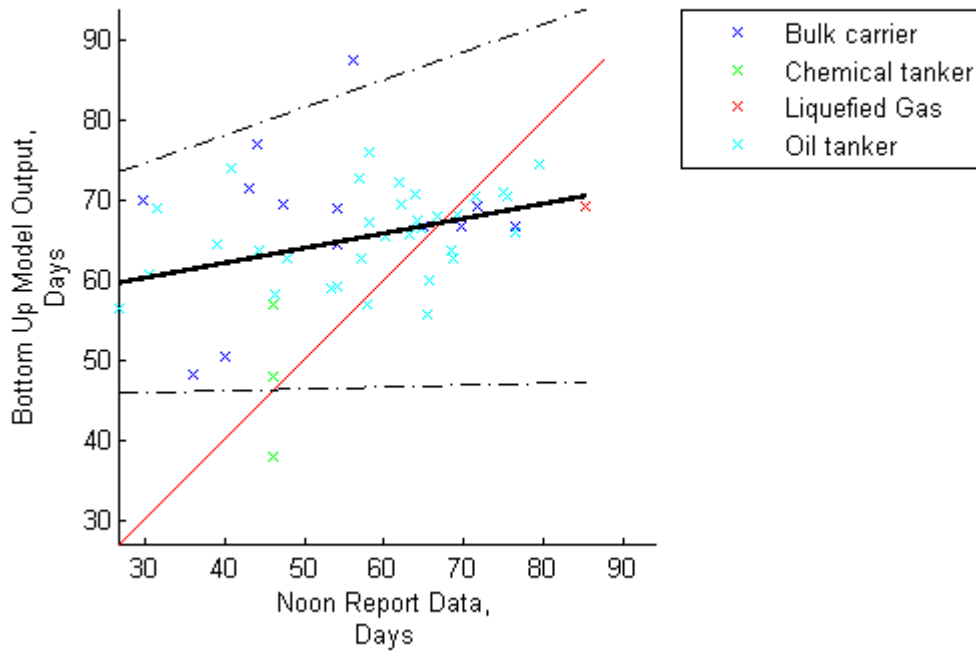

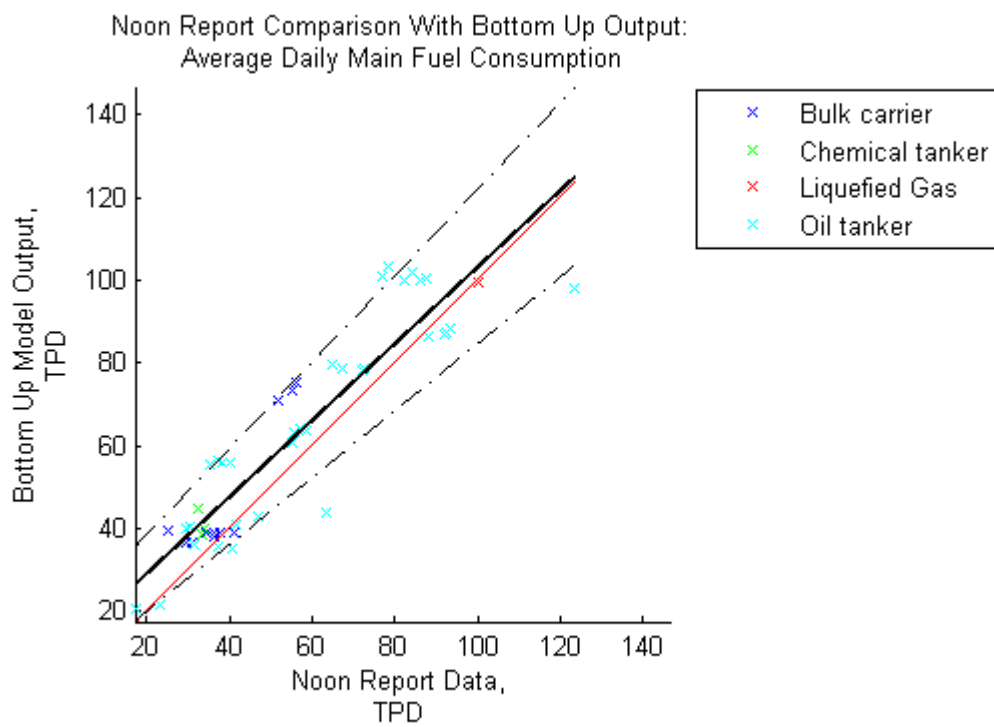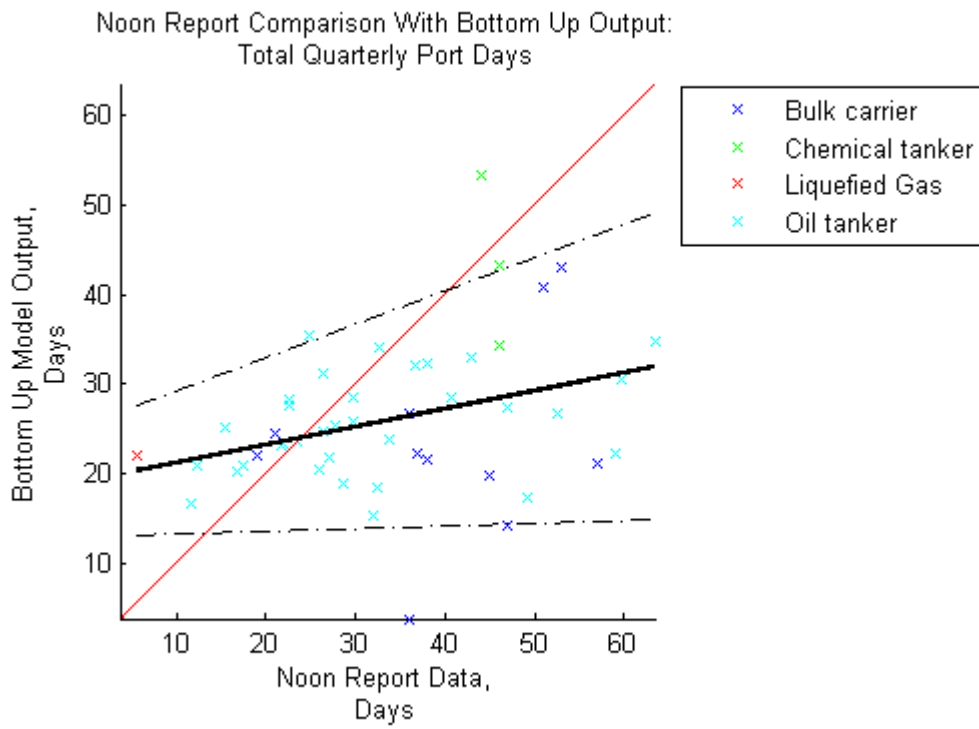


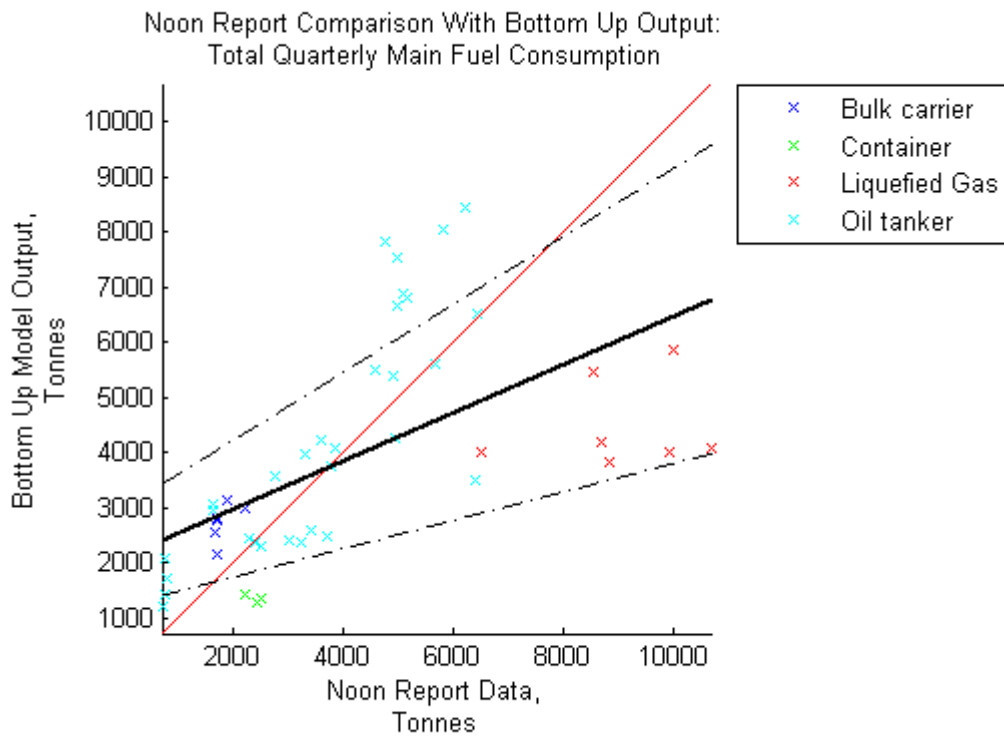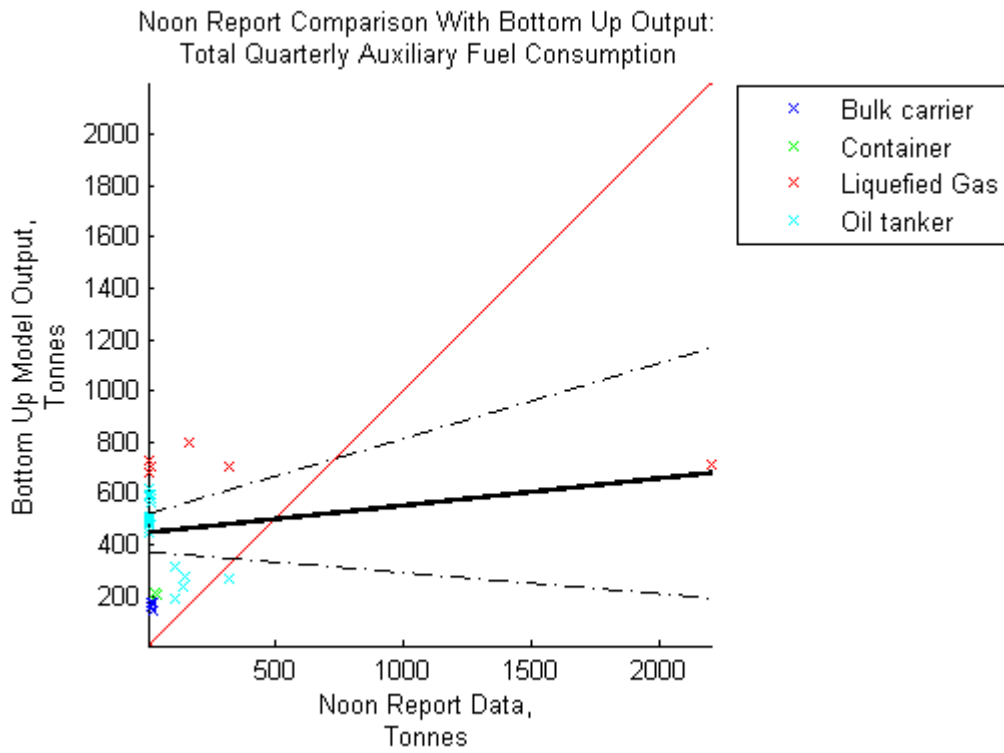

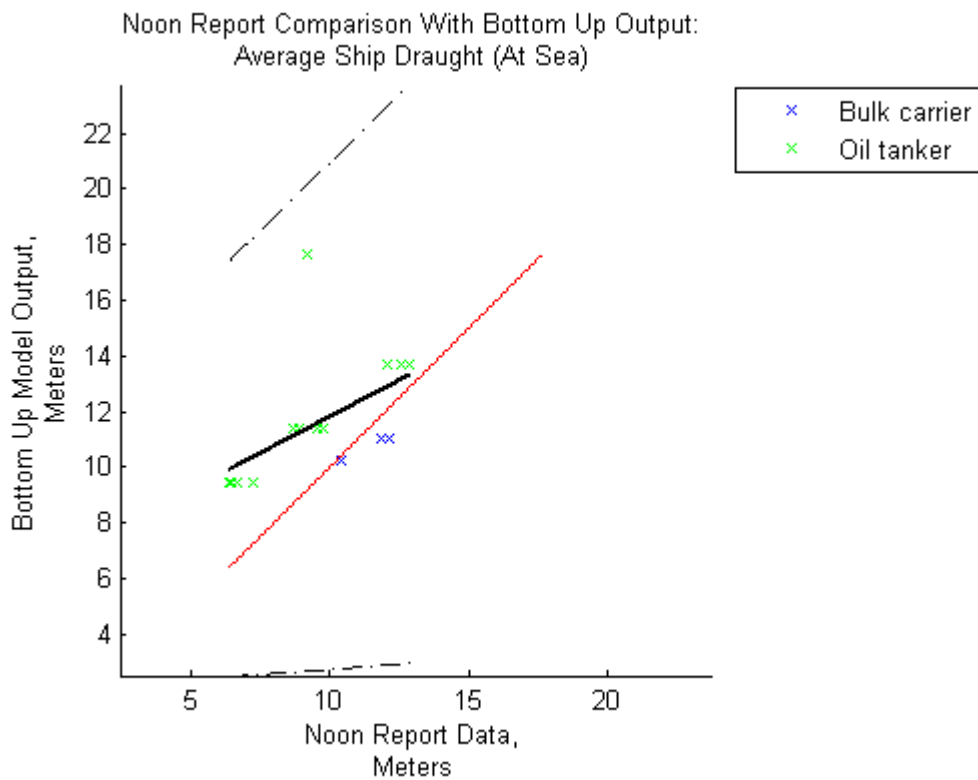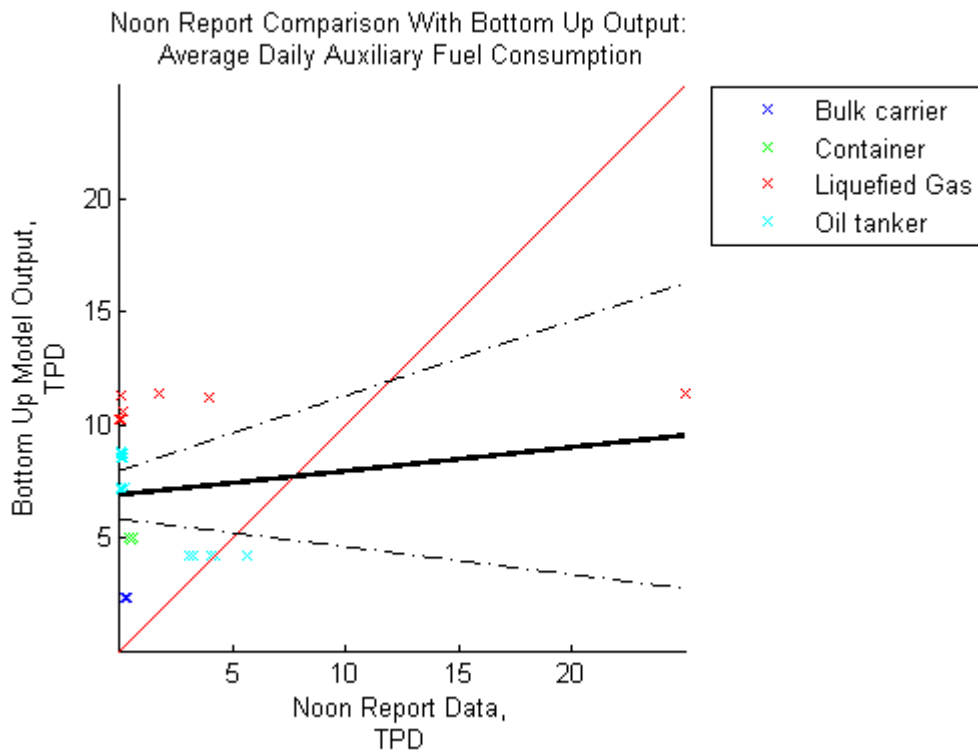


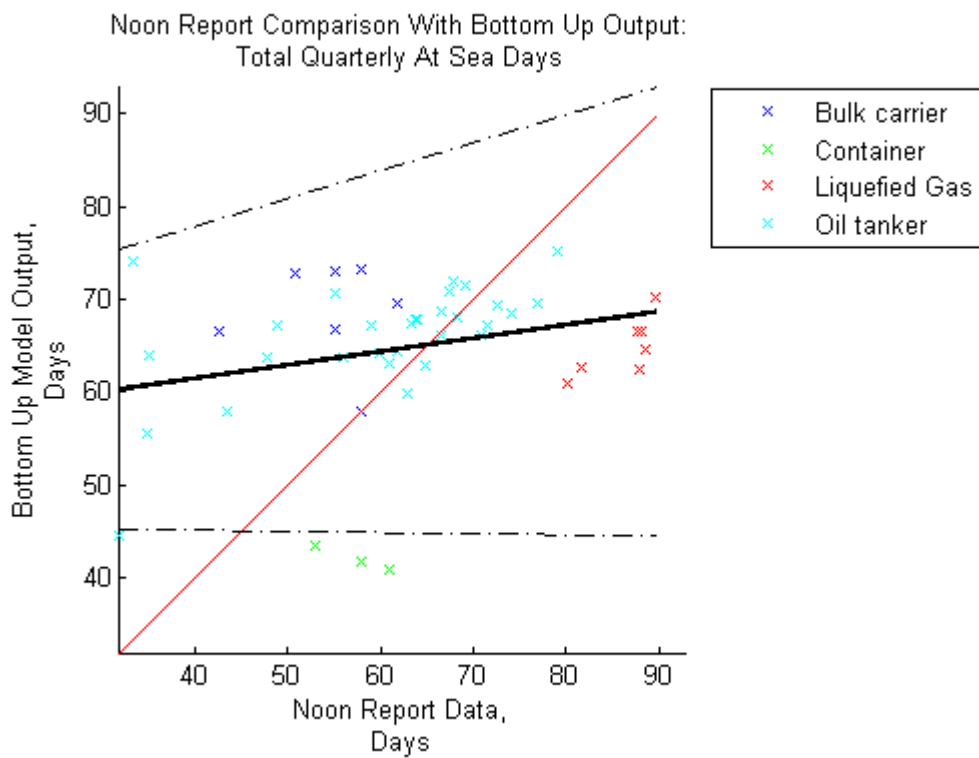
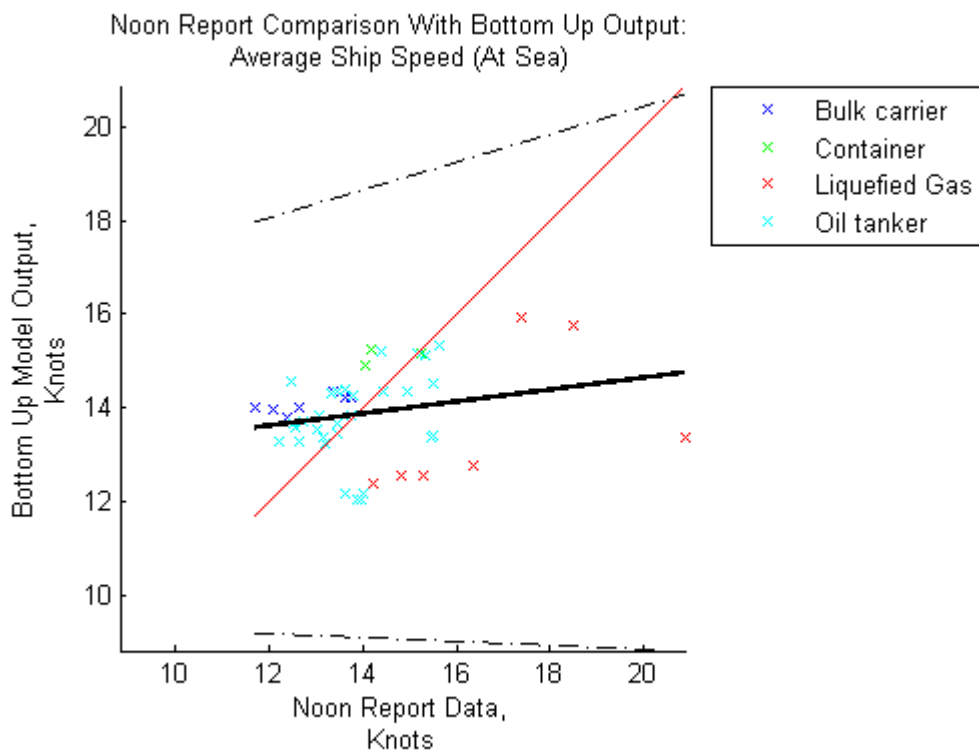




Noon Report Comparison With Bottom Up Output:  
Total Quarterly Port Days

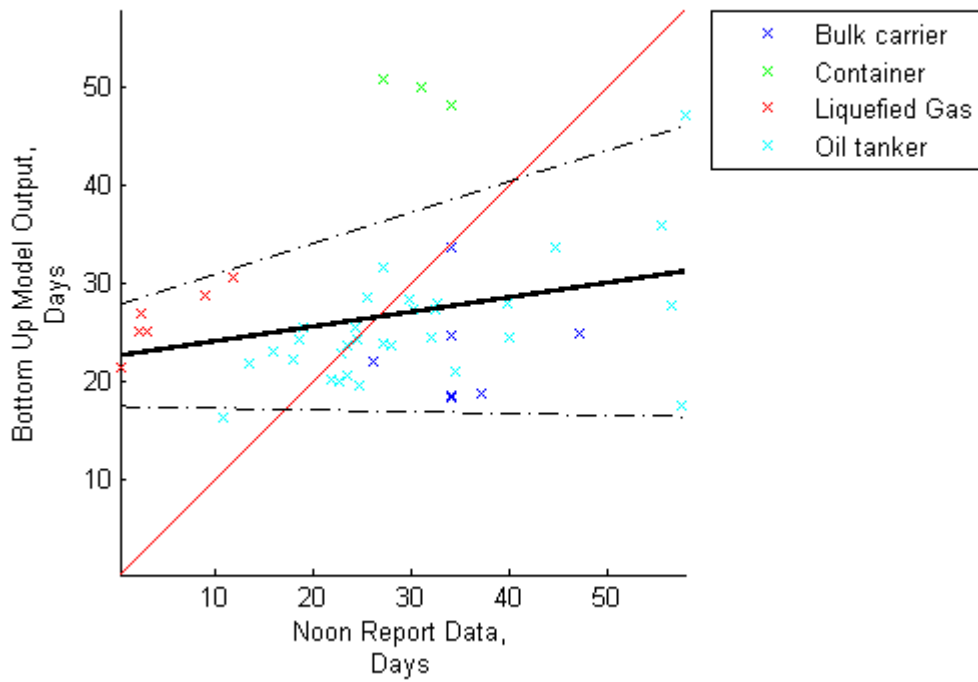

Noon Report Comparison With Bottom Up Output:  
Average Daily Main Fuel Consumption

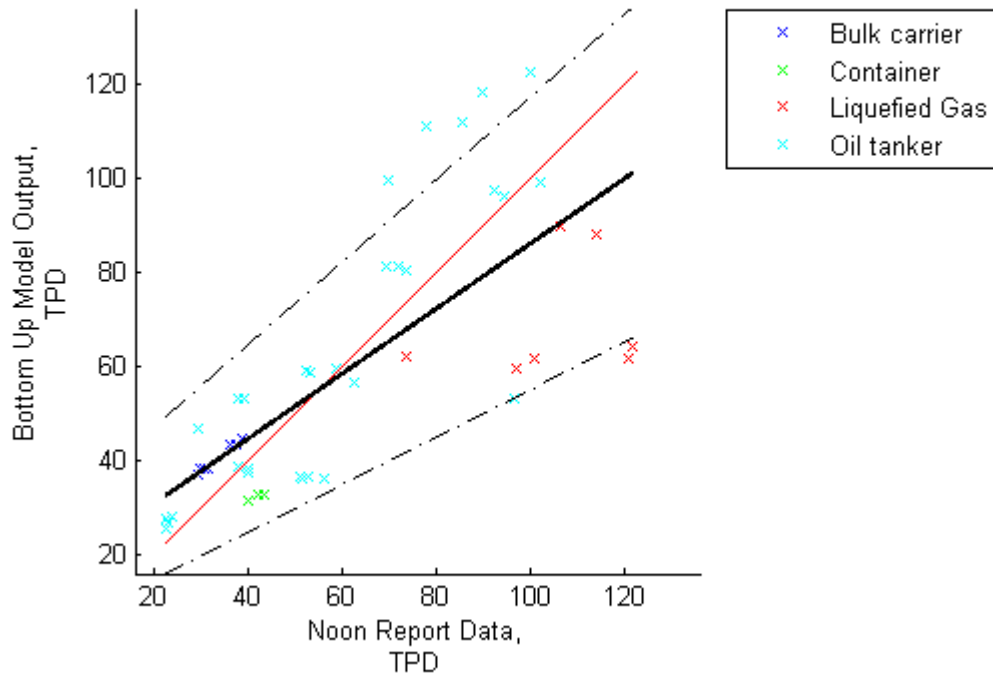


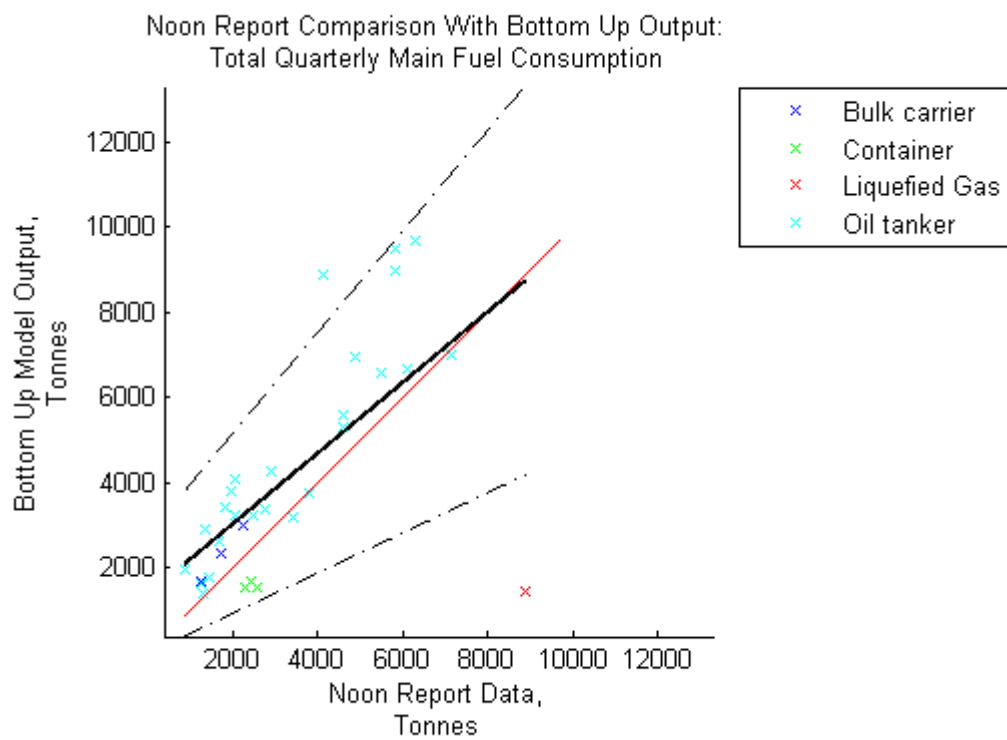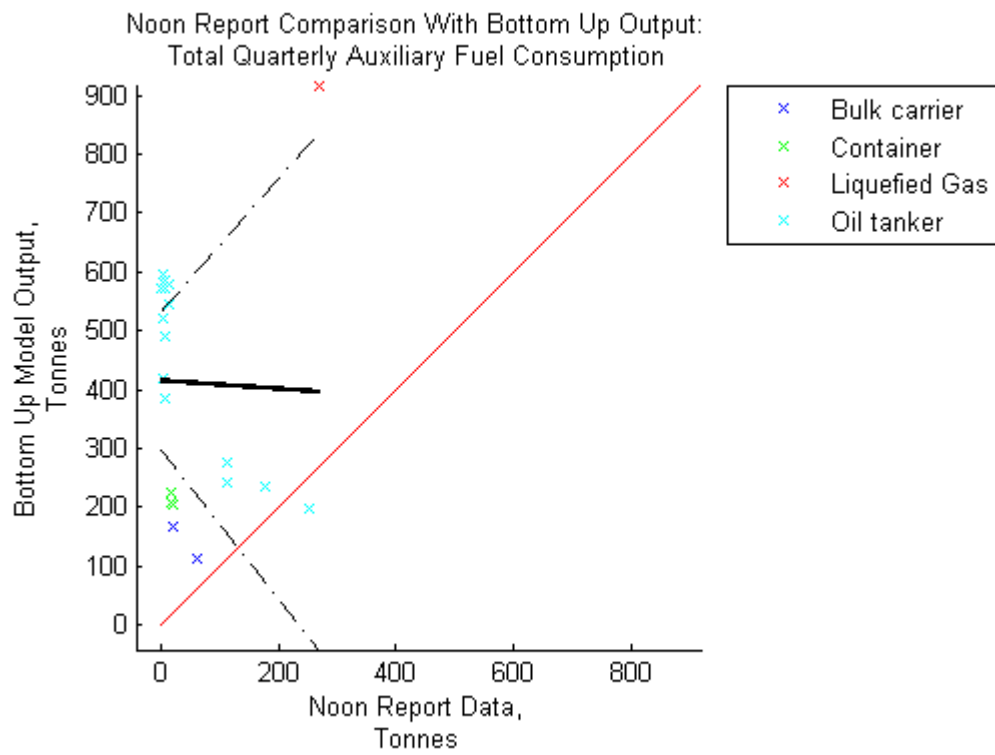

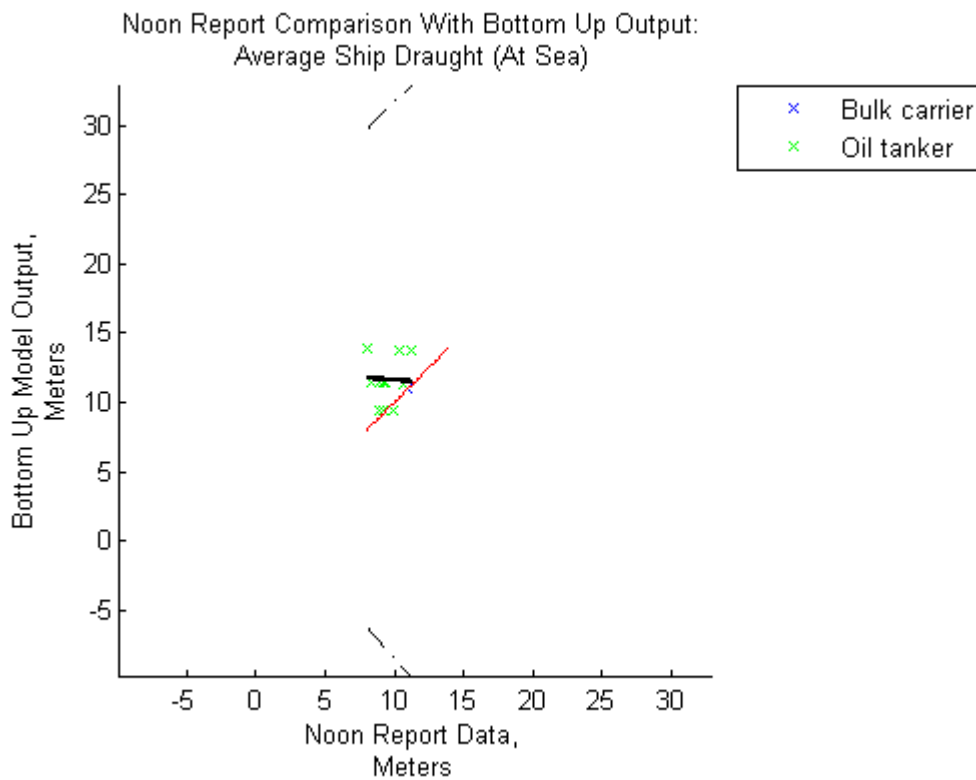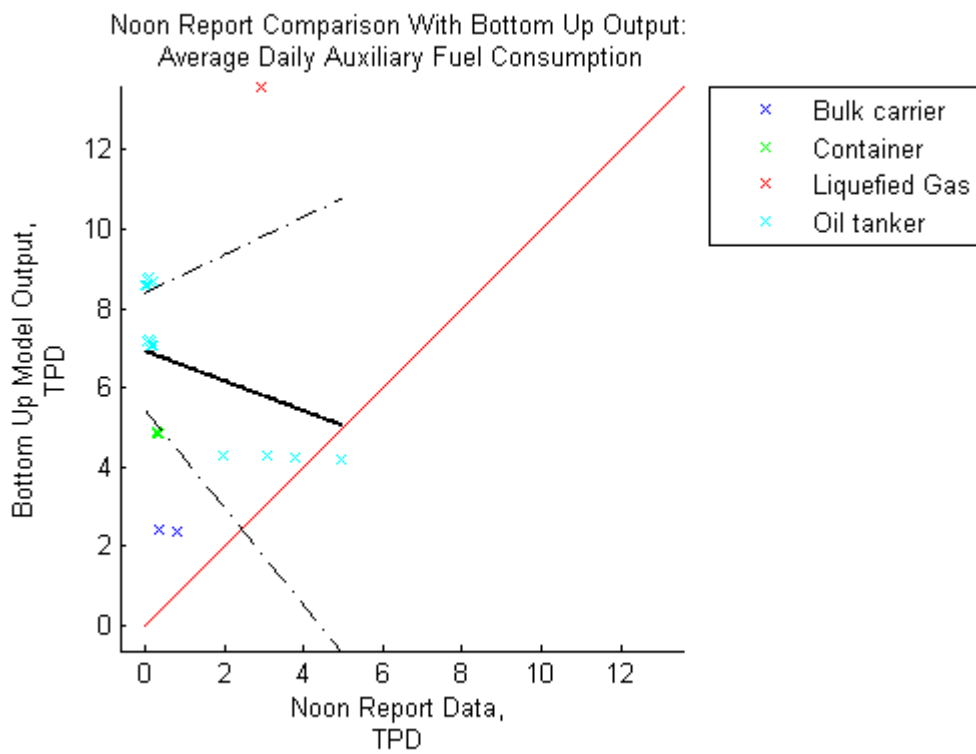





Noon Report Comparison With Bottom Up Output:  
Average Ship Speed (At Sea)

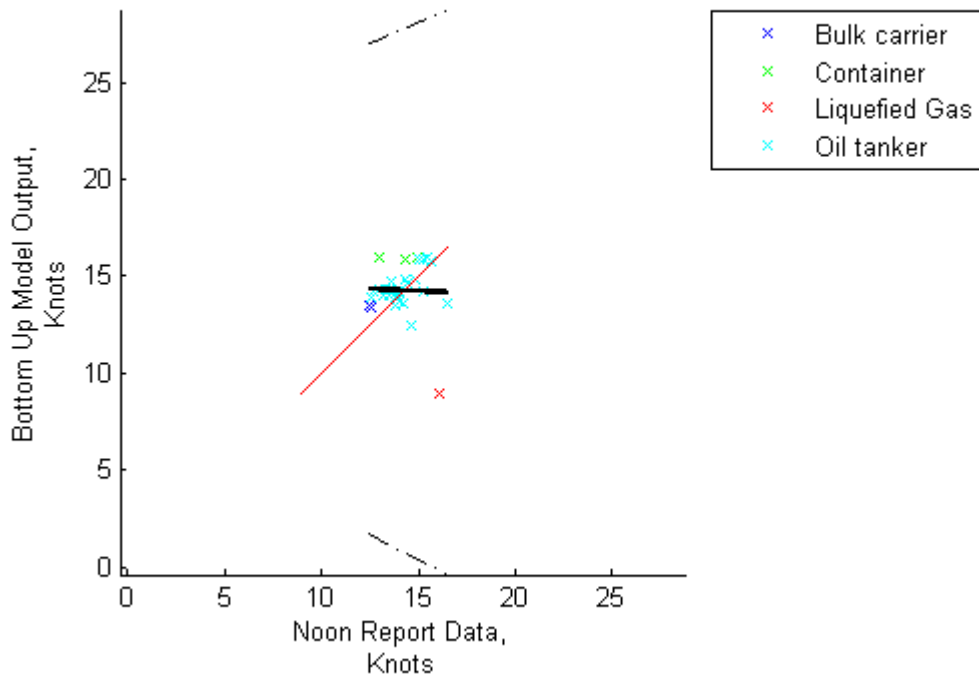


Noon Report Comparison With Bottom Up Output:  
Total Quarterly At Sea Days

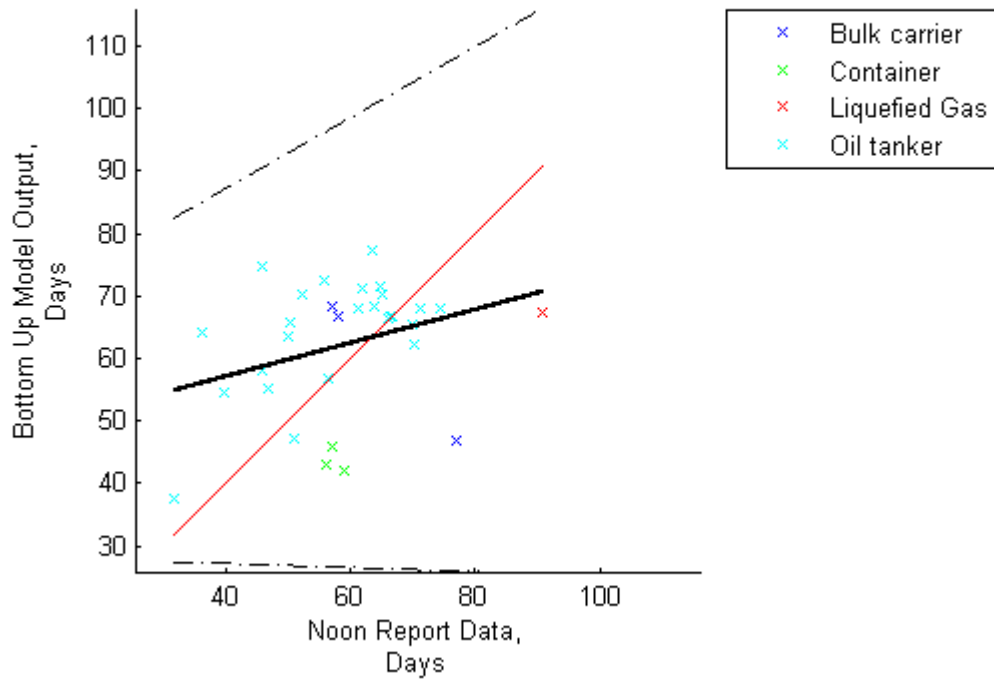

Noon Report Comparison With Bottom Up Output:  
Total Quarterly Port Days

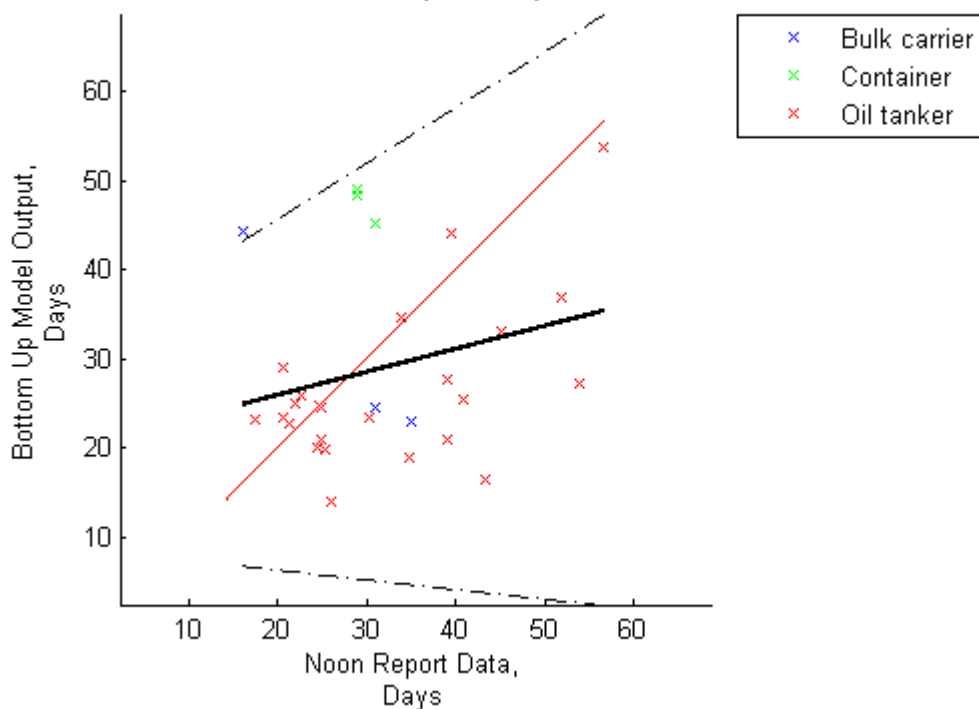

Noon Report Comparison With Bottom Up Output:  
Average Daily Main Fuel Consumption

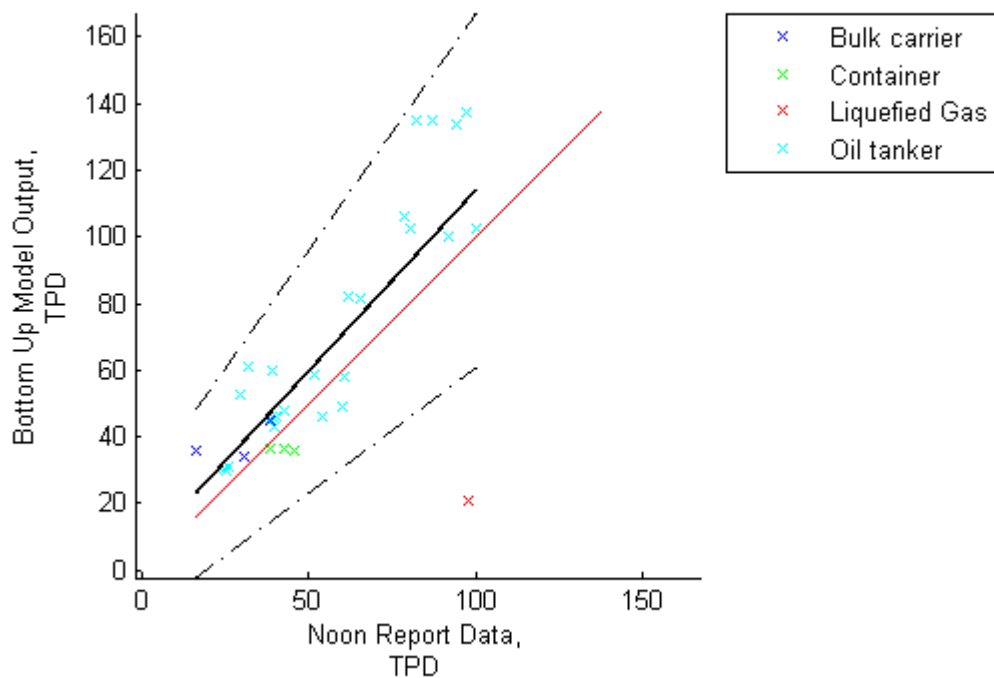

## **Annex 4 (details for Section 1.5.1, top-down uncertainty analysis)**

### **Organization of top-down uncertainty analysis**

The top-down uncertainty section begins with a review of ongoing data accuracy efforts in which the International Energy Agency (IEA) has participated, and data accuracy reports produced by the Energy Information Administration (EIA), an energy statistics activity independent from the IEA. We also summarize some additional literature that helps to understand uncertainty in energy statistics. We then summarize four specific sources of uncertainty in IEA data. With this information, we present our work to estimate possible sources and quantities of uncertainties that may adjust reported statistics. Our quantification of potential adjustments to fuel statistics distinguishes sources with the greatest impact on fuel statistic uncertainty as primary (or first-order) sources from secondary and tertiary sources.

### **Ongoing data quality efforts related to uncertainty in fuel sales**

The Joint Organisations Data Initiative (JODI) has worked since 2001 to produce a database to provide more transparency in oil market data. The data effort includes “the collection of monthly oil statistics from each organisation’s member countries by means of a harmonised questionnaire on 42 key oil data points.” More than 90 countries/economies, Members of the six pioneer organisations (APEC, EUROSTAT, IEA, OLADE, OPEC and UNSD) participate in JODI Oil, representing around 90% of global oil supply and demand. Among the important work this group is performing, JODI is engaged in data quality assessment. That work appears to be focused on uncertainties related to several elements, including:

1. data validation;
2. intercomparison with other energy statistics;
3. data collection; and
4. metadata.

While much of the current work seems to be engaging knowledge transfer through workshops and training exchanges, the group has produced two approaches to characterizing data participation and content quality. These are available in what JODI reports as smiley-face assessments, produced every six months since 2012 (Barcelona, 2012). Currently, these are qualitative assessments only, and could not be used in the quantitative uncertainty analysis required for this work.

### **Review of EIA accuracy analyses (estimation of percentage error)**

Energy Information Administration (EIA) resources were evaluated for a) similarity to IEA statistics; and b) complementary data quality investigations. A discussion of the comparison of EIA similarity for fuel oil statistics was provided in the QA/QC section under Section 1.4. Here we discuss the EIA reports on data accuracy as independent and indirect evidence of sources and magnitude of uncertainty in top-down fuel consumption statistics.

A series of reports, titled Accuracy of Petroleum Supply Data, exists for EIA statistics that identify types of error that may exist in U.S. energy statistics (Heppner and French, 1996-2008; Heppner and Breslin, 2009). These include:

1. Sampling error (difference between the sample estimate and the population value); this arises because “surveys are administered to samples of the monthly populations to reduce respondent burden and to expedite the turnaround of data” (Heppner and Breslin, 2009).
2. Non-sampling error (two types)

- a. Random: “on average, and over time, values will be overestimated by the same amount they are underestimated. Therefore, over time, random errors do not bias the data, but they will give an inaccurate portrayal at any point in time” (Heppner and Breslin, 2009).
- b. Systematic: “a source of bias in the data, since these patterns of errors are made repeatedly.”

The series of reports by EIA identified specific sources of uncertainty (non-sampling errors) that may include:

1. insufficient respondents coverage of target population;
2. nonresponse;
3. response error; and
4. errors due to lack of survey clarity.

The EIA report identifies imports and exports as statistics with greater uncertainty, similar to the IEA. “Because of the irregularity of imports for crude oil and petroleum products, the magnitude and range of percent errors for both the monthly-from-weekly (MFW) and the petroleum supply monthly (PSM) imports numbers can be expected to be much larger and wider than for production and stocks” (Heppner and Breslin, 2009). No discussion assessing the accuracy of marine fuel statistics (domestic or international) is provided by EIA in these annual reports. However, fuel totals are expected to exhibit similar or greater uncertainty to imports, for reasons the IEA has identified in the QA/QC discussion.

For the IMO GHG Study 2014, the consortium specifically reviewed the 2009 report by Heppner and Breslin, because it was the most recent such report we obtained, and because it reported the U.S. imports percent error for distillate and fuel oil in 2007 – a common year for both IMO GHG Study 2009 and IMO GHG Study 2014. (Each of these reports presents a running series of five years’ data, so this report reported percent error statistics on imports for 2003-2007.)

For U.S. residual fuel oil imports, the EIA 2007 monthly-from-weekly (MFW) “range of percent errors was 57.38, ranging from -28.72 to 28.66 percent.” This error is much larger than the range of percent errors for production, or stocks, or even crude oil imports, which are all on the order of 10 percent or less. For example, “the 2007 range of the MFW percent errors [for fuel oil production], ranging between -5.16 and 3.86percent, was 9.02,” and “the 2007 range (2.02) of the PSM percent errors [for fuel oil stocks], ranging from -1.84 to 0.18 percent, was the smallest range over the 5-year period.” The percent error in monthly and annual statistics for U.S. distillate fuel imports was smaller than fuel oil imports, but bigger than error ranges for distillate production, stocks, etc.

Analysis of U.S. statistics provided two insights into our analysis of potential uncertainty in global top down inventories for shipping. First, imports and exports are confirmed as important sources of uncertainty even for a nation with very good statistical data on its energy balances. Second, uncertainties surrounding different fuel types can be dissimilar. We do not take any of the specific U.S. calculations on percent error to represent global statistical error, nor do we imply that the analysis done by EIA represents IEA percent error. Moreover, we recognize that maritime bunkers (indeed international bunkers for aviation and marine) are unaddressed in the U.S. evaluation of accuracy of energy data. Combined, these two insights provide independent evidence that import and export statistics can jointly contribute uncertainty in energy balances, also identified as a potential uncertainty by IEA.

## IEA sources of uncertainties that can be quantified for this work

As mentioned in Section 1.5.1 of the main report, IEA energy balance statistics represent the best available top-down numbers that include marine bunker fuels estimates on a global basis. We assess the quality of IEA by looking at possible source of uncertainties, and by estimating the potential correction when it is feasible.

We identify four important sources of top down marine fuel uncertainties:

1. Maritime Sector Reporting: fuel sales distinguish between international and domestic navigation categories with uncertainty. Errors can be made when fuels reported under different categories are combined. This type of error can be split in two cases:
  - a. Misallocations. Fuels that should be attributed to national navigation are allocated in International navigation or vice versa. In this case only the total (sum) of sales per type of fuel is correct, while the allocation is uncertain.
  - b. Duplications. Fuel sales could be allocated in both categories, double counting the amount of fuel sold. In this case, the allocation and fuel totals can contain errors contributing to uncertainty.
2. Other Sector Misallocation: marine fuels might be allocated to other non-shipping categories e.g. export, agriculture. In this case, marine fuels would be under-reported and other sectors may have their fuels over-reported.
3. Transfers category reporting: according with IEA this category comprises inter-product transfers, which results from reclassification of products either because their specification has changed or because they are blended into another product. The net balance of inter-product transfers should be zero, however “National stocks” can be used in blending residual bunkers to specification. This could increase the volume of fuel delivered to ships sometimes without statistical documentation (IEA 2013), resulting in under-reporting.
4. Data accuracy: IEA data may suffer of intrinsic accuracy due to the ways the data are collected.

These sources of discrepancy are not mutually exclusive, and not all of them can be identified and quantified given available data at the national levels.

## Estimates of potential adjustment to top-down statistics

Potential adjustments are evaluated by considering world energy statistical balances, and quantifying discrepancies in quantities most related to known top down uncertainty. We quantify sector misallocation specifically for cumulative volumes that could be misallocated marine bunkers, in whole or in part.


### Export-import misallocation

Some of energy allocation discrepancies can be identified through analysing IEA data in world balance format. We use these discrepancies to estimate potential corrections due to uncertainties that are under the category “other sector misallocation.”


As acknowledged by IEA, the difference between total exports and imports (net difference at world scale) indicates a possible misallocation of bunkers into exports for some countries. By collecting IEA data in world balance format, this net difference at world scale can be used to identify an upper bound of potential correction. Given evidence that at least part of this discrepancy could be from a misallocation of marine fuels, we expect that the best estimation of this uncertainty would adjust the fuel sale data. In other words, if excess exports are not recorded as imports, then excess fuel deducted as exports could be sold as marine bunkers without record.

The net discrepancies reported by IEA as “Statistical differences” are calculated as total consumption minus total supply. Figure 20, Figure 21, and Figure 22 show the marine fuels sales data and both discrepancies over the period 1971-2011. One should expect the net statistical difference to be smaller than any single contributor to the net differences. This is because net statistic difference includes the export-import discrepancy, and all other discrepancies that may be additive or offsetting, including unquantified discrepancies (uncertainties) in marine bunker statistics.


The export-import discrepancies represent a large fraction of marine fuel oil bunkers than distillate bunkers. Conversely, statistical differences are larger for distillate fuels than for fuel oil. These findings could be expected, given the larger presence of fuel oil in the maritime sector. For example, allocation of bunker sales as exports, if occurring equally frequently for all marine fuels, would produce a greater discrepancy for marine fuel oil. Moreover, given the greater world demand for distillate fuels (e.g., small statistical uncertainties in a larger fuel sector) statistical uncertainty could represent a larger fraction of distillate marine bunkers than import-export differences. Natural gas discrepancies vary around the zero value, and no international gas sales statistics exist; therefore, we will not quantify uncertainty for natural gas data.

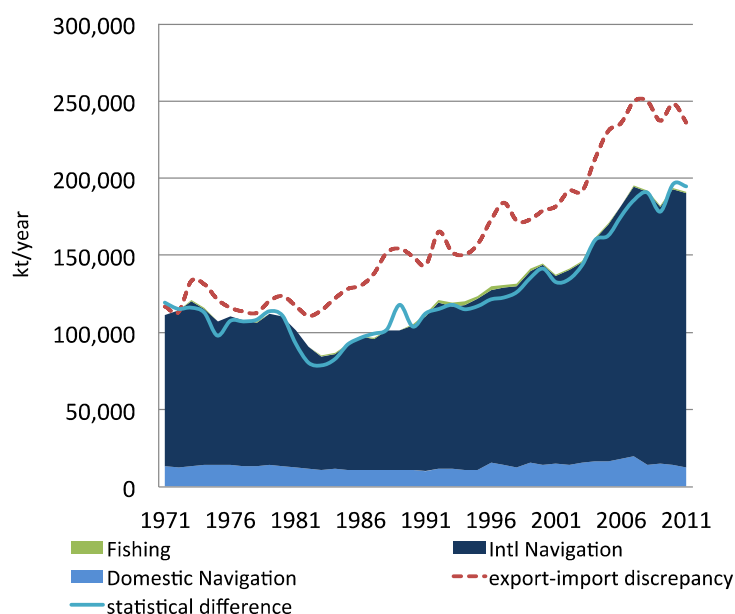

**Figure 20 Fuel oil shipping sales, export-import discrepancy and statistical difference at world balance.**

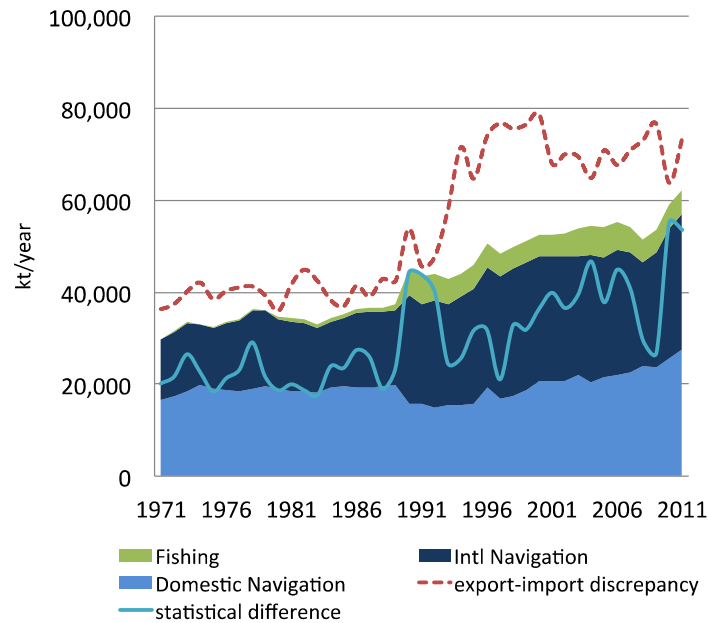

**Figure 21 Gas/diesel shipping sales, export-import discrepancy and statistical difference at world balance.**

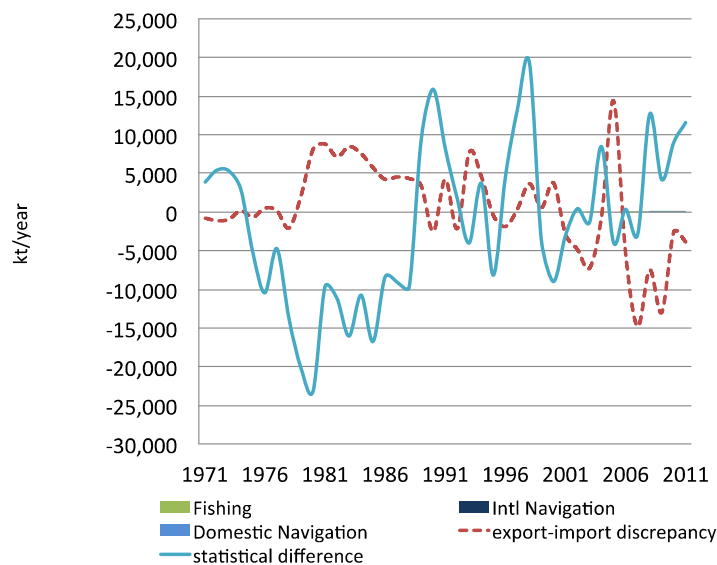

**Figure 22 World natural gas shipping sales, export-import discrepancy, and statistical difference.**

### Transfers category reporting

The IEA Transfers category:

“...comprises...products transferred and recycled products. Products transferred are intended for oil products imported for further processing in refineries. Recycled products are finished products, which pass a second time through the marketing network...”

Due to this definition the net balance of inter-product transfers cannot be checked if equal to zero, however the net balance of “Transfers” may be an indicator of a potential maximum discrepancy in the net balance of inter-product transfers figure.

We find that the world transfers balance also is greater than zero, meaning that net transfer statistics do not balance at the world scale – in other words, that additional fuel exists in the transfers data. If these transfers include significant volumes of fuel or other products that were later blended for marine bunkers, the statistical data could underreport marine bunkers consumption.

Our assessment indicates that the additional uncertainty contributed by such an allocation error would increase the Export-Import adjustment by some ~10% to ~20% since 1998. Figure 23 illustrates the comparative impact on uncertainty from the observed Export-Import discrepancy and the observed Transfers Balance discrepancy.

#### Data accuracy

The accuracy of the data depends from different statistical approach on data collection, reporting and validation. For example, Marland (2008) reports that

“...the United States national calculation of CO<sub>2</sub> emissions has an uncertainty (at the 95% confidence level) of –1% to 6%, and Environment Canada reported a comparable value of –4% to 0%. Olivier and Peters (2002) estimated that emissions from Organisation for Economic Co-operation and Development (OECD) countries might have—on average—an uncertainty of 5% to 10%, whereas the uncertainty may be 10% to 20% for other countries. The International Energy Agency did not report the uncertainty of its emissions estimates but relied on Intergovernmental Panel on Climate Change (IPCC) methodologies and cited the IPCC estimate that “for countries with good energy collection systems, this [IPCC Tier I method] will result in an uncertainty range of ±5%. The uncertainty range in countries with ‘less well-developed energy data systems’ may be on the order of ± 10%.”

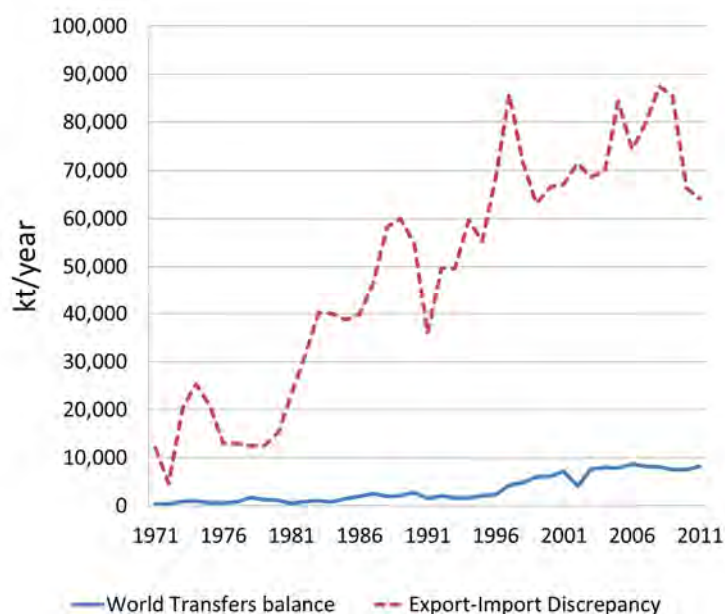


Figure 23 Stacked graph showing sum of fuel transfer balance and export-import discrepancy.

Only qualitative assumptions on the possible percentage of accuracy within the marine sectors can be attempted based on the available literature. La Quere et al



(2009) used an uncertainty in CO<sub>2</sub> emissions of ±6% for global inventories, but that necessarily means that some sectors and nations can have greater than 6% uncertainty, especially smaller sectors; conversely, small percent uncertainties in energy consuming nations or sectors may represent very large volumes of fuel. Marland (2008) reported that these types of uncertainties and errors showed “no systematic bias, and the global totals were very similar”. Relative differences were largest for countries with weaker national systems of energy statistics, and absolute differences were largest for countries with large emissions. Again, this literature did not assess marine fuel statistics specifically, but reported on overall energy balance integrity. Based on the literature we cannot quantify the remaining accuracy of marine fuel consumption from top-down statistics.

### **Results of top-down uncertainty analysis**

We present a modified estimate of top-down marine fuels totals by adding the fuel volumes attributed to export-import discrepancies for fuel oil and gas diesel and by adding the additional fuel volumes associated with the positive balance of world fuels transfers. These represent the primary and secondary sources of quantified uncertainty. We add these volumes to the sum of reported fuel sales for fuel oil and gas diesel, to assess the total additional fuel that may be considered part of the shipping demand for energy. Our logic in combining known and reported marine fuel consumption by international shipping, domestic shipping, and fishing ships is as follows:

1. The uncertainty in allocation of marine fuels among international voyages, domestic shipping, and fishing remains unquantified; therefore, we produce an assessment of uncertainty in top down estimates that is independent of the allocation uncertainty challenge.
2. The total marine fuels volumes reported in the IMO GHG Study 2009 included such a combined statistic as the consensus estimate for bounding 2007 bottom-up fuel consumption; therefore, our analysis is consistent with that study.
3. Such a general summary of the quantified uncertainty in top-down fuel consumption serves the important comparison tasks in this scope of work.

**Figure 24 presents a time-series of the quantified change in top-down fuel consumption by represented world net export-import discrepancies and world net fuel transfers balances as additive to the reported marine fuel totals for 1971-2011. Figure 25 and .**

Table 16 present these results for years 2007-2011.

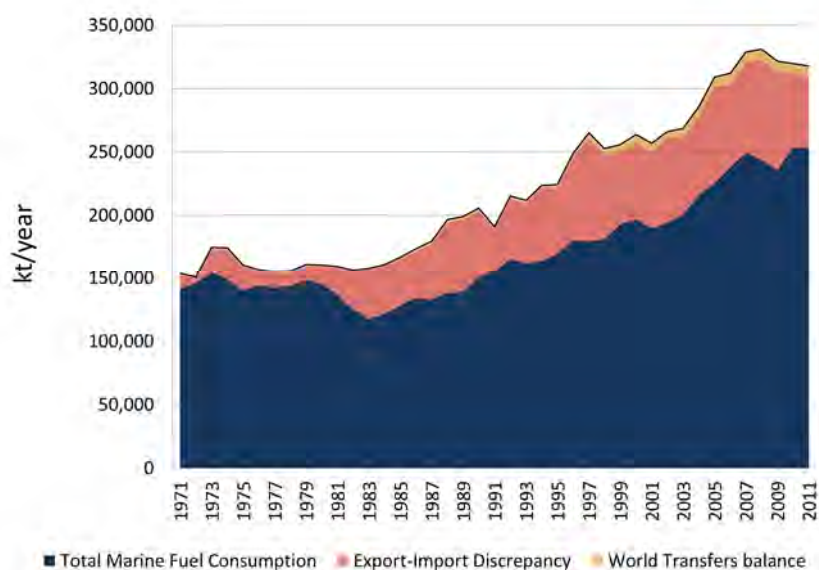


Figure 24: Time series of adjustments due to primary and secondary sources of uncertainty.

Table 16: results of quantitative uncertainty analysis on top-down statistics (million tonnes).

| Marine Sector                                 | 2007         | 2008         | 2009         | 2010         | 2011         |
|---|--------------|--------------|--------------|--------------|--------------|
| Total Marine Fuel Consumption (reported)      | 249.2        | 243.7        | 235.9        | 253.0        | 253.5        |
| Adjustment for Export-Import discrepancy      | 71.5         | 79.4         | 78.0         | 59.0         | 56.0         |
| Adjustment for Fuel Transfers balance         | 8.1          | 8.1          | 7.5          | 7.5          | 8.2          |
| <b>Adjusted Top-Down Marine Fuel Estimate</b> | <b>329.8</b> | <b>331.2</b> | <b>321.4</b> | <b>319.5</b> | <b>317.7</b> |

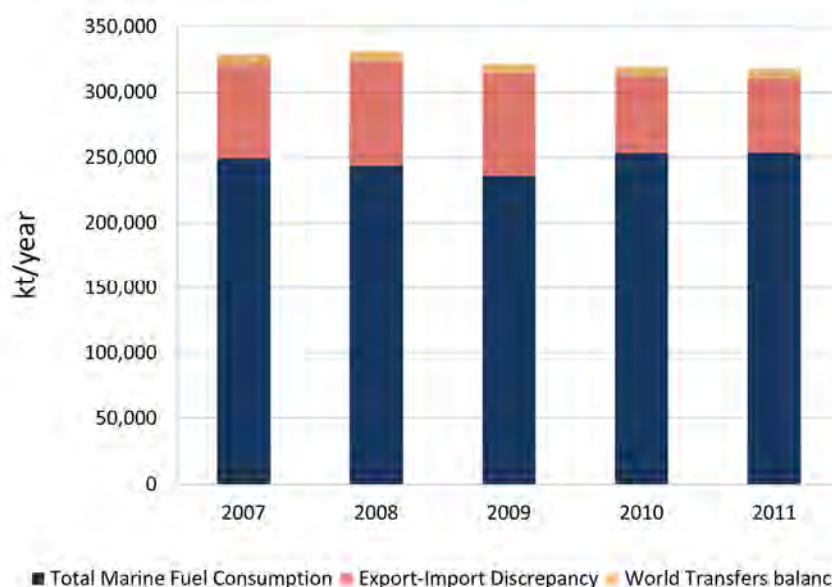


Figure 25: 2007-2011 adjusted marine fuel sales based on quantitative uncertainty results.

Export-import discrepancy represents the primary source of uncertainty, as measured by the quantity of adjustment that is supported by our analysis. This discrepancy exists because the

total fuel volumes reported as exports exceeds the total fuel volumes reported as imports. Evidence associating the export-import discrepancy with marine fuels includes the known but unquantified potential to misallocate bunker fuel sales as exports, as documented above. The magnitude of this error increased during the period of globalization, particularly since the 1980s. This is evident in Figure 24, where the percent of adjustment due to export-import discrepancies prior to 1980 never exceeded 10%, and where the percent adjustment due to export-import discrepancies after 1980 always exceeded 10%. In fact, the percent adjustment due to export-import allocation uncertainty has never been lower than 22% since 1982. More recently, .

Table 16 and Figure 25 illustrate the top-down adjustment for the years 2007-2011. During these years, the average adjustment due to export-import allocation uncertainty averaged 28%.

The secondary source of uncertainty, measured by the quantity of adjustment that is supported by our analysis, derives from the excess balance of fuels that were transferred among domestic consumption sectors in national inventories. This discrepancy exists because deduction reclassification of energy products in one or more fuel sectors remains undocumented as an addition reclassification in another sector. In other words, fuel-transfer deductions appear to *be blended into* marine bunkers to meet ship/engine fuel quality specifications without accompanying documentation reclassifying them as added to the marine fuel sales volumes. The trend on this error only slightly increased from the 1970s to mid-1990s and the magnitude of the error, as a percent of marine fuel sales never exceed 2% until 1997. Since 1997, the contribution to uncertainty in marine fuel statistics has more than doubled; nonetheless, during the 2007-2011 period the average impact on marine fuel statistics of ~3% of still remains small compared to export-import allocation uncertainty.

Tertiary sources of uncertainty exist, including different statistical approaches on data collection, reporting and validation. These have been observed and reported in the IMO GHG Study 2009 and in the first Study of Greenhouse Gas Emissions from Ships, 2000 (see Table 3-1 of that report). Data accuracy is an ongoing QA/QC effort by IEA and others to help minimize these sources of error and uncertainty. Our work for this update indicates three insights about the nature of uncertainties that we judge to be tertiary, or smaller than those discussed above.

1. The impact of these uncertainties cannot be shown to be consistently biased; in other words, the sign of a potential adjustment appears to vary from year to year;
2. Little evidence supports a cumulative effect on marine fuel sales statistics; in other words, the magnitude cannot be shown to be increasing or decreasing over time; and
3. No uncertainty adjustment can be quantified from the existing statistical differences.

The combined error in recent years associated with these uncertainties ranges from -64 to -87 million tonnes of fuel, as indicated in .

Table 16 for 2007-2011. Incidentally, the 2007 calculated adjustment would reconcile within 1.2% of the top-down statistics with the activity-based estimate of 333 million tonnes reported the IMO GHG Study 2009.

### Uncertainty in top-down allocations of international and domestic shipping

We anticipate limited ability to evaluate or reduce allocation uncertainty within top-down fuel types. This could mean that a remaining key uncertainty for IMO will be the designation of top-down marine bunker sales as domestic or international, without additional empirical data. Options include:

1. Treat reported allocations in existing IEA statistics as certain, and use these to allocate the fuel adjustments quantified in this uncertainty analysis;
2. Recognize that allocations in the statistics are also uncertain, and study ways to adjust both reported fuel volumes and the adjustments quantified here using the same top-down assumptions, evidence, and conclusions;
3. Treat as independent the marine fuel sales data and the adjustment quantified by uncertainty analysis using different top-down assumptions, evidence, and conclusions; and
4. Coordinate top-down and bottom-up allocation approaches to leverage insights and produce mutually consistent allocation algorithms.

## Annex 5 (details of Section 1.5.2 bottom-up inventory uncertainty analysis)

### Sources of uncertainty in IMO GHG Study 2009

In the IMO GHG Study 2009, the method relied upon weighted average values for each ship/size category. As such, much of the uncertainty in the prior study was related to aleatory uncertainty. This limited the ability of that work to quantitatively characterize uncertainty, although some key aleatory uncertainties could be characterized with distributions around computed average values.

The IMO GHG Study 2009 relied upon a set of independent estimates to define a confidence range on the central estimate for fleet wide fuel use and emissions. That study also discussed uncertainties in calculating total emissions (IMO GHG Study 2009, Table 3-1). The IMO GHG Study 2009 reported that a dominant source of uncertainty included assumptions about average main operating days, and that a secondary source of uncertainty was average main engine load. Both of these were applied in common to all ships in a type and size category. That study reported that better AIS collection and better quality control on AIS-reported speed were needed to reduce uncertainty. Lastly, the IMO GHG Study 2009 reported a number of uncertainties with auxiliary engine calculations.

### Overview of sources of uncertainty in current work

Figure 26 illustrates where potential uncertainty is introduced into the bottom-up model for this update. Table 17 (adapted from Jalkanen et al. (2013)) identifies examples of uncertainties and relates these to explicit QA/QC efforts that reduce uncertainty.

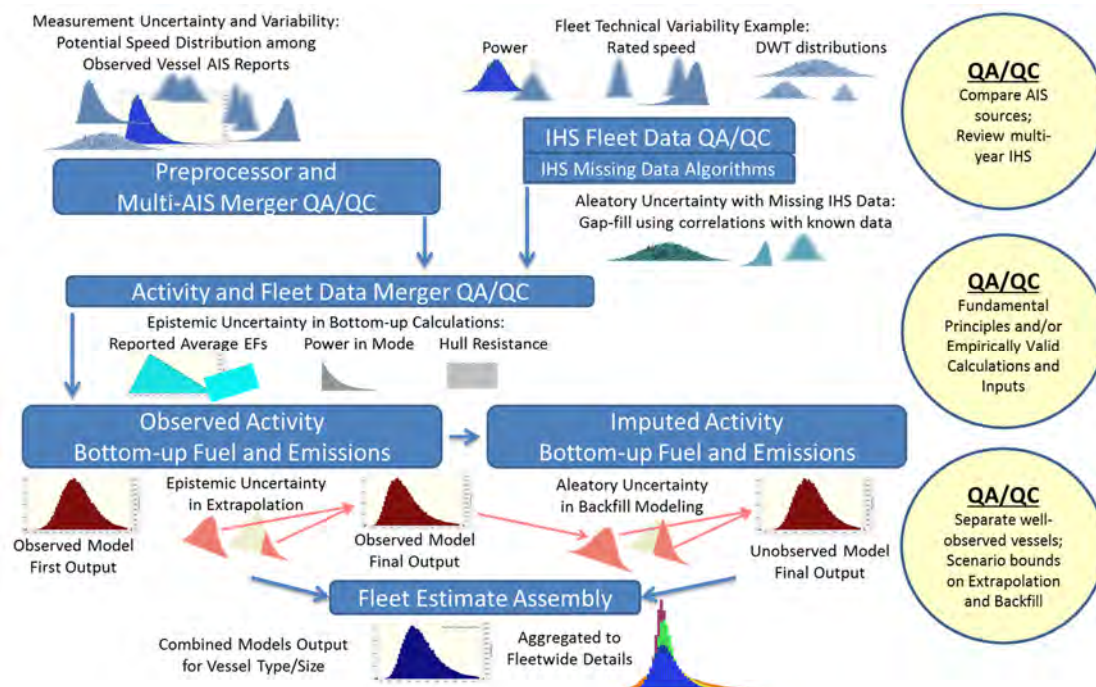


Figure 26: bottom-up model with overview of QA/QC and uncertainty characterization.

**Table 17: Characterization of uncertainty in bottom-up model.**

| Modelling Stage                                | Uncertainty (examples)   | QA/QC measures to reduce uncertainty                                  | Remaining uncertainty  |
|--|--|---|--|
| Pre-processor and Multi-AIS Merger             | Speed;<br>Draft;<br>Time observed  | Variability in observed activity at individual ship                   | Measurement  |
| IHSF Fleet data                                | Gaps in data   | Algorithm based on empirically valid data to gap-fill missing data    | Aleatory   |
| Activity and Fleet Data Merger                 | All Equations;<br>Load by mode;<br>SFOC by mode;<br>EFs;<br>Fuel properties; | Empirical validation; fundamental principles; noon reports comparison | Epistemic<br><br>Aleatory (aggregated measurement uncertainty) |
| Observed Activity bottom-up Fuel and Emissions | Extrapolation of known activity to unobserved periods in a year              | Select well-observed ships;<br>Quantify percent of year extrapolated  | Epistemic<br><br>Aleatory                                      |
| Imputed Activity bottom-up Fuel and Emissions  | Backfill of ship profile for unobserved ships                                | Characterize ships subject to backfill;<br>Quantify backfill fleet    | Epistemic<br><br>Aleatory                                      |
| Fleet Estimate Assembly                        | No new uncertainty   |   | Propagated from prior steps                                    |

From both the diagram in Figure 26, and Table 17, we have broken down the uncertainty in the total emissions estimate into three key interconnected components of uncertainty:

1. The uncertainty in the emissions from a ship in 1 hour
  - a. When the ship is observed on AIS
  - b. When the ship is not observed on AIS
2. The uncertainty in the aggregation of (uncertain) hourly emissions (both observed and unobserved hours) into annual estimates for each ship.
3. The uncertainty in estimating the total annual emissions from the (uncertain) annual estimate of emissions for a fleet of ships.

The bottom-up model uses a mixture of look-up data related to a ship's specification (e.g. engine, age of ship), physics in closed-form equations (e.g. relationships between speed and power), and empirical data (e.g. emissions factors) in order to derive emissions. The multiple sources of uncertainty in both input parameters and the relationships embedded in the model itself (some of which, e.g. speed and power, are non-linear), in combination with the aggregation of multiple observations (by hour and by ships in the fleet) mean that characterization of uncertainty on input parameters does not map straightforwardly onto the uncertainty of the outputs (annual emissions by fleet of ships). However, there is an established literature on this subject, which indicates that Monte Carlo simulation can be used to structure an estimate of the uncertainty of the bottom-up method's outputs from characterization of both the input and model uncertainties, and this literature was used to define the method employed in this study.

The following text in this annex outlines the approach taken to conduct a quantitative assessment of the CO<sub>2</sub> emissions inventory's uncertainty by considering the input

and model uncertainties at each of the three levels outlined above (hourly per ship, annual per ship and annual per fleet).

The characterization of uncertainty relies on knowledge about the measurement variable that is being used, and a benchmark or 'the truth' to which that measurement is being compared. For many of the parameters that are needed, we have used the best available data in our bottom-up model, which limits the availability of datasets that can be used as proxy benchmarks and therefore comparators. Deeper insight or higher quality datasets that are available are typically only available for a sample of ships, and this adds a risk that the sample used could contain bias. The process of deriving quantitative estimates of uncertainty therefore has to be viewed as approximate and not definitive (there is uncertainty in the quantification of uncertainty). This section therefore lays out the thought processes and data used as clearly and comprehensively as possible and focuses on those sources of uncertainty judged to be of greatest significance to the overall estimate.

### **Uncertainty in the emissions from a ship in 1 hour**

There are a number of sources of uncertainty in the estimate of the uncertainty of the emissions for a 'given' ship in a 'given' hour. These stem from both uncertainty in the technical parameters used to characterize the ship (its current specification in terms of hull and machinery, the condition of the hull etc) and the operational specification (the weather the ship has encountered, its speed through water and draught). The descriptions that follow are not the only parameters that are uncertain, but they are all components of the equations in Section 1.2 which are the core of the calculation of fuel consumption and emissions, and therefore of the highest significance in influencing the uncertainty of the estimated emissions.

#### **Estimate of uncertainty of the input parameters**

##### ***Speed through the water uncertainty***

A ship's aero and hydrodynamic resistance and therefore power requirements are a function of ship speed (among other things). Of these two sources of resistance, in calm weather it is the hydrodynamic resistance that dominates the total resistance and this is a function of a ship's speed through the water. The relationship is commonly approximated as a cubic (e.g. power is proportional to speed cubed), as described in Section 1.2. Consequently, small variations in ship speed are magnified into larger variations in power (and therefore fuel consumption and emissions). For periods of time when a ship is observed on AIS, the bottom-up method uses the ship's speed as reported in the AIS message (which is most commonly obtained from a ship's GPS, which measures speed over ground). For periods of time when the ship is not observed on AIS, the bottom-up method estimates the ship speed by extrapolating an operating profile based on the information gathered when the ship is observed (see Section 1.2). With relation to a ship's resistance, there are therefore three important and fundamental sources of uncertainty in the bottom-up method:

1. the uncertainty due to the approximation of a ship's speed through the water using a sensor measuring speed over ground
2. the uncertainty in the speed over ground, estimated as an hourly average speed:
  - a. from the weighted averaging of one or more instantaneous reports of speed obtained from AIS
  - b. from the extrapolation of observed activity to estimate the operating parameters when the ship is not observed.

The first of these is a function of a relative speed between the water and the ground e.g. tides and currents, and is therefore a function of the metocean conditions that

the ship is sailing in. These conditions cannot be easily generalized, some ships may spend all their time operating in areas of high tidal flows and current (typically coastal shipping) and others may spend little time operating in such areas (typically, although not necessarily, when a ship is in the open ocean). To estimate the variability, we have used operator data supplied for a fleet of twenty ships (a mixture of bulkers and tankers with a variety of ship sizes) for which measurements of average speed through the water and average speed over ground were available, averaged over 24 hours. The ships are owned by a variety of companies but managed by the same company and have consistent data reporting mechanisms. In total they represent approximately 80 ship year's of operation and data. Figure 27 displays the estimate of the probability density function of the difference between speed over ground and speed through the water. The average difference is -0.14 knots and the standard deviation is 0.95 knots. Implicit in this distribution is the measurement error associated with the speed logs used to obtain the speed through the water and the GPS' used to obtain the speed over ground, however these are assumed to be negligible relative to the uncertainty in the difference between the two measurements.

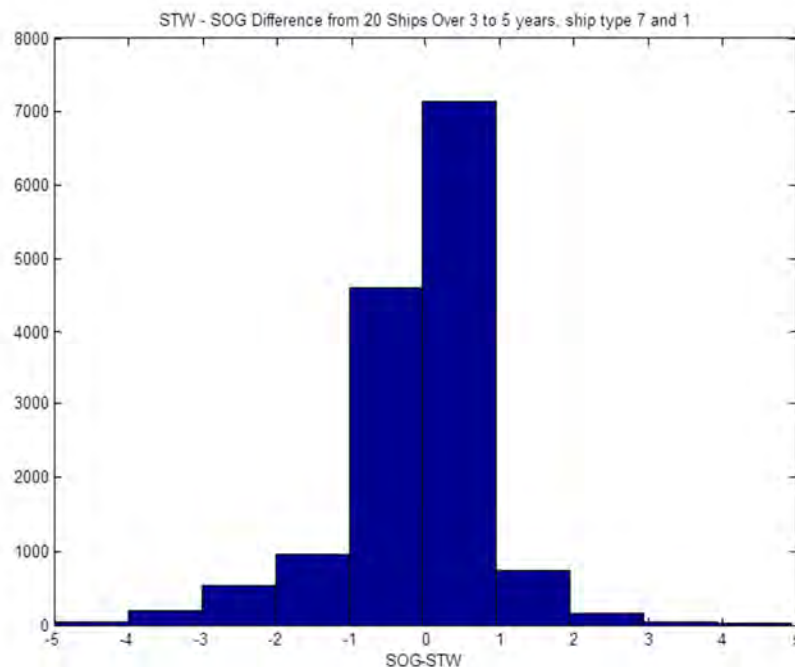


Figure 27: Relationship between speed over ground and speed through the water.

From the analysis described above in the section “Activity estimates temporal coverage QA/QC”, an estimate was found for the standard deviation of the uncertainty of speeds during an hour of operation. These values are:

- For an observed hour, 0.75kt
- For an unobserved hour, 1.85kt

*Combining these sources of uncertainty we can estimate the total uncertainty for the two types of observation (see*

Table 18).

#### ***Draught uncertainty***

Draught influences the underwater hull surface area and hull form. It varies during the course of a voyage and from one voyage to another. The measurement of



draught is obtained from the data reported in AIS messages (see Section 1.2). On some ships, the value is entered manually (from draught mark readings or a loading computer), and others it is reported from sensors. As the value is entered manually and rarely audited for quality, it is possible for spurious or null returns to be observed in the raw data. For the purposes of estimating the uncertainty of this parameter, the comparison between the noon report and the reported AIS data has been used. The data for both observed and unobserved hours can be seen in Figure 28. The dotted black lines are the 95% confidence bounds around the best fit line. Reading from the chart, these confidence bounds imply that the standard deviation of the error between the bottom-up estimate of draught and the noon report value is approximately 10%. This value is used both for the observed and the unobserved hours.

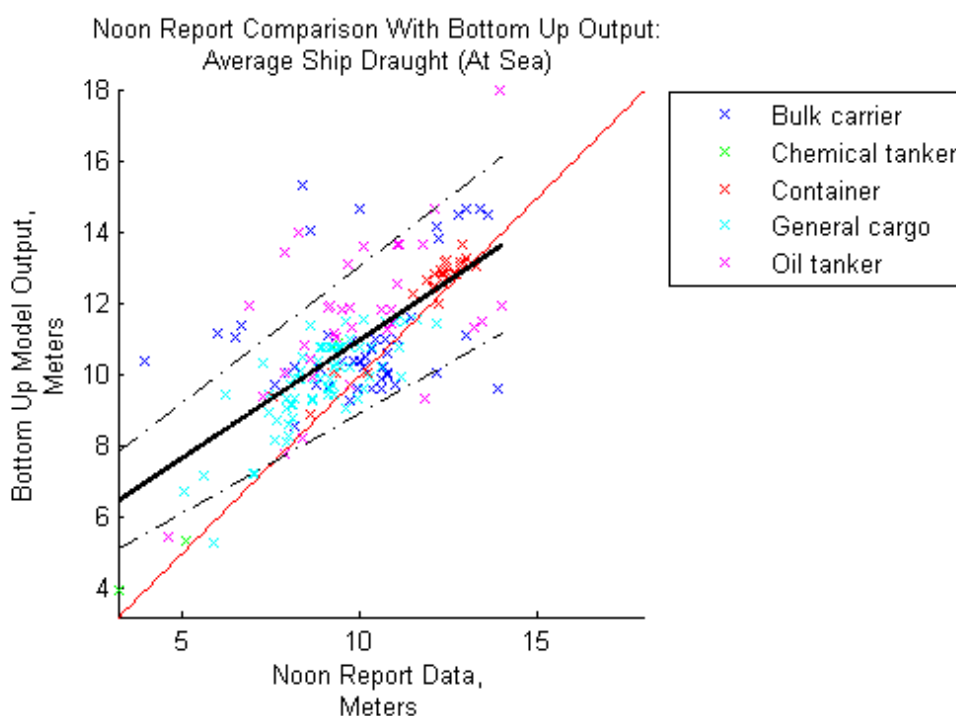


Figure 28: Comparison between draught estimated in the bottom-up model from AIS data and reported in noon reports.

### Ship specification uncertainty

Section 1.4 discusses the quality assurance of the ship specifications obtained from IHFS. This concludes that uncertainty exists, but cannot be easily quantified or characterized. A comprehensive dataset describing the variability of fouling and weather for different ship types and sizes was also not available, leaving this uncertainty to be omitted. An investigation was carried out into the variability of the power law relationship between a ship's resistance and its speed (see Annex 1: powering subroutine `power_at_op`). This relationship is key to the bottom-up method's ability to accurately capture the slow-steaming phenomenon. Samples of ships from a number of ship types were taken, and parameters describing the ship's length, beam, draught etc were used in a calculation of resistance using the Holtrop-Mennen resistance regression formulae (Holtrop and Mennen (1982)). Figure 29 presents the outcome of the investigation, which shows for bulk carriers greater than 40,000 dwt that the use of a cubic relationship between speed and power is a high quality assumption. For smaller ships, the assumption of a cubic appears less valid, and in particular for container ships. Drawing from this investigation and to ensure

simplicity of analysis, the speed-resistance relationship is held as a cubic and no uncertainty is applied.

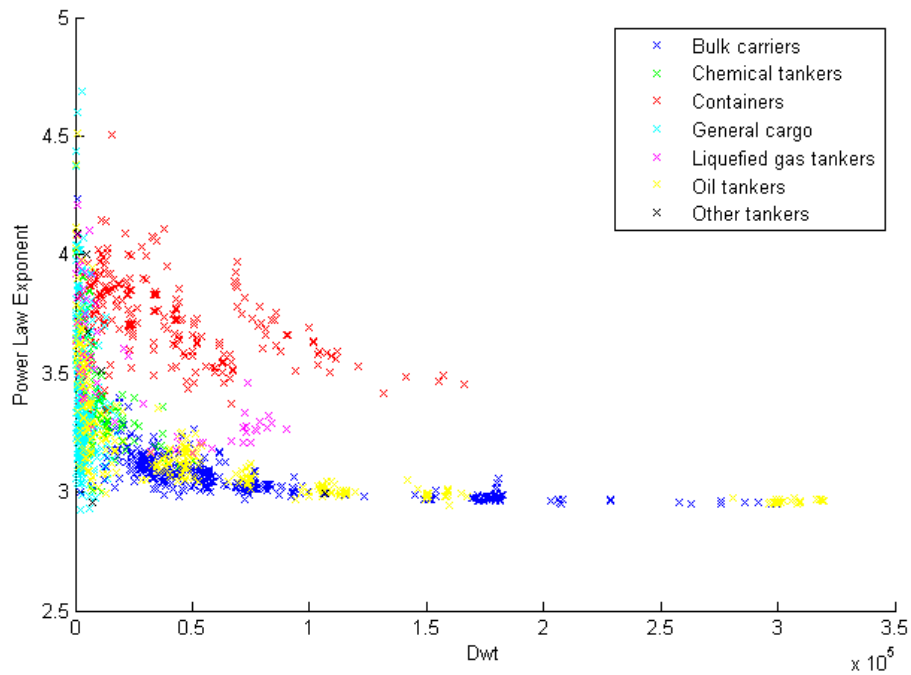


Figure 29: estimation of the power-law relating deadweight to resistance for samples of different ship types.

### Summary of input uncertainties used in the per hour uncertainty analysis

Table 18: Summary table of uncertainty characterisations used.

|   | Input parameter          | Hour when observed on AIS   |                    | Hour when not observed on AIS |                    |
|---|--------------------------|---|--------------------|-------------------------------|--------------------|
|   |                          | Mean  | Standard deviation | Mean                          | Standard deviation |
| Operation                                   | Speed                    | Mean at sea speed   | 11%                | Mean at sea speed             | 18%                |
|   | Draught                  | Mean at sea draught   | 10% of mean        | Mean at sea draught           | 10% of mean        |
| IHSF Specification                          | Installed power          | Known to exist, but not known in magnitude and so assumed to be deterministic                     |                    |                               |                    |
|   | Reference (design) speed |   |                    |                               |                    |
| Other technical and operational assumptions | Fouling added resistance | Equally uncertain, regardless of whether observed or unobserved, assumed here to be deterministic |                    |                               |                    |
|   | Weather added resistance |   |                    |                               |                    |
|   | SFOC                     | Known to exist, but assumed deterministic in this calculation                                     |                    |                               |                    |
|   | Cf                       | Known to exist, but assumed deterministic in this calculation                                     |                    |                               |                    |
|   | n                        | Significant for smaller ships but for larger ships,   |                    |                               |                    |

|  |            |   |
|--|------------|---|
|  |            | assumed deterministic   |
|  | Aux/boiler | Known to exist, but not known in magnitude and so assumed to be deterministic |

**Uncertainty in the aggregation of hourly emissions into annual emissions**

For periods of time during the year that a ship is not observed on AIS, we extrapolate from the measured activity data. This extrapolation introduces uncertainty, as this step requires that assumptions be made. The uncertainty analysis will propagate uncertain inputs at the per-ship-hour stage of the model into the per-ship-year stage of the model.

In addition to uncertainty in the speed, for times when the ship is not observed on AIS, there is also uncertainty about whether the ship is at sea or in port. The reliability of the extrapolation algorithm for estimating the annual days at sea at varying levels of AIS coverage reliability was examined in detail in Annex 3 (Activity estimates temporal coverage QA/QC). This analysis provides a derivation for the relationship between coverage and uncertainty in the days spent at sea, which in combination with the per hour uncertainty estimates, is applied to calculate the total uncertainty in the annual CO<sub>2</sub> emissions estimate.

**Estimate of uncertainty of the input parameters and method**

The assumptions used to estimate the uncertainty in the annual fuel consumption of an average ship in a given ship type and size category are listed in Table 19.

**Table 19: Estimated parameters for the uncertainty in the inputs to the annual emissions calculation.**

| Period                              | Input parameter                               | Mean   | Standard deviation |
|-------------------------------------|---|--|--------------------|
| Per annum (observed and unobserved) | Ratio of days at sea to days at port per year | Taken from LRIT to AIS analysis derived relationship |                    |
| When observed on AIS                | Average emissions per hour at sea             | Read in from the per hour uncertainty analysis       |                    |
|                                     | Average emissions per hour in port            |  |                    |
| When not observed on AIS            | Average emissions per hour at sea             |  |                    |
|                                     | Average emissions per hour in port            |  |                    |

**Results**

The output of the simulation of the per year uncertainty analysis, using the outputs from the per hour uncertainty analysis, can be seen in Figure 30 and Figure 31. Both plots depict the bulk carrier size category 60-99999 dwt. The first of the two plots characterizes the uncertainty in 2007, a year when the average ship in that type and size category was observed on AIS just 14% of the year. This contrasts with the second figure, which is calculated for 2012, when the AIS coverage of the average ship was 65% and the uncertainty greatly reduced.

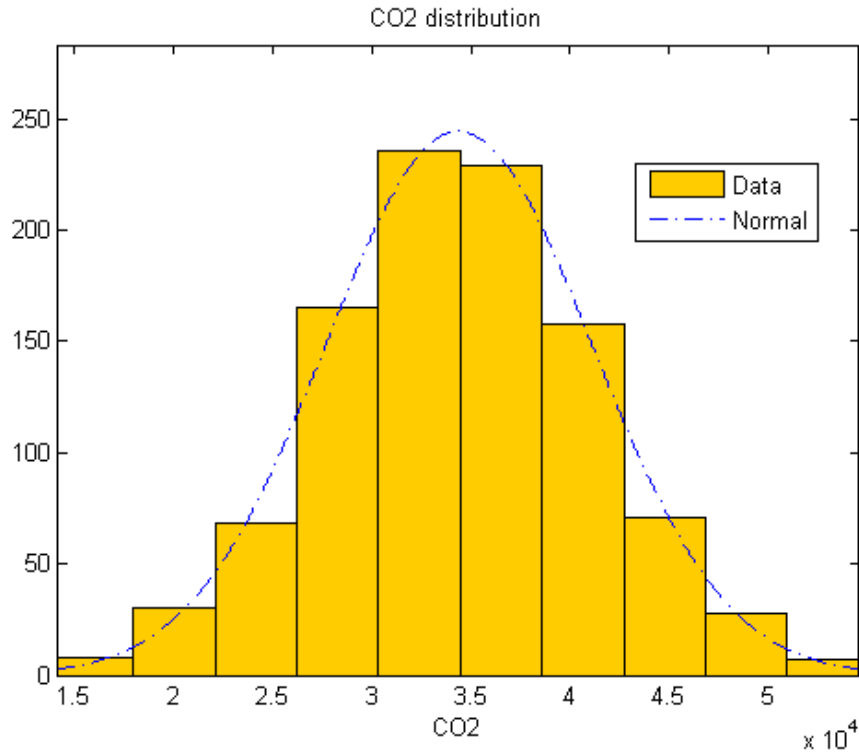


Figure 30: Uncertainty around the annual emissions (x axis is '00000 tonnes of CO<sub>2</sub>), y axis is frequency, from a Monte Carlo simulation of an 'average' panamax bulk carrier (60-99,999 dwt capacity) in 2007.

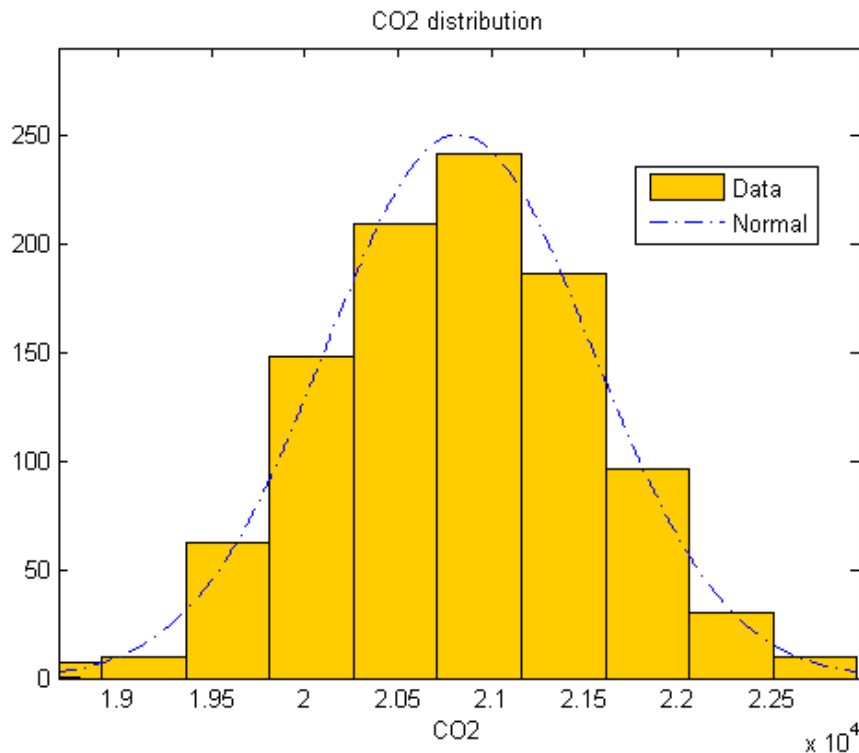


Figure 31: Uncertainty around the annual emissions (x axis is '00000 tonnes of CO<sub>2</sub>), y axis is frequency, from a Monte Carlo simulation of an 'average' panamax bulk carrier (60-99,999 dwt capacity) in 2012.

### Uncertainty in the aggregation of a fleet of ship's emissions

Activity for ships that are in-service but not observed in AIS is imputed. Epistemic and aleatory uncertainty is introduced because the observed activity is propagated to the ships where imputed activity is used. The assumptions used to estimate the influence of the uncertainty associated with the imputed fleet, in combination with the uncertainty of the observed fleet, are listed in Table 20.

**Table 20: Estimated parameters for the uncertainty in the inputs to the annual emissions calculation.**

| Per annum per ship                                      | Input parameter                    | Mean  | Standard deviation |
|---|------------------------------------|---|--------------------|
| A ship observed in AIS                                  | CO <sub>2</sub> emissions per year | Read in from the per year uncertainty analysis  |                    |
| A ship not observed in AIS but identified as in-service |                                    | <p>Characteristics of an individual ship's fuel consumption are simulated from the distribution of the CO<sub>2</sub> emissions of the observed fleet of the same ship type and size,</p> <p>The number of in-service ships is simulated as a uniform distribution with a minimum value of zero (e.g. none of the ships defined in IHSF as in-service but not observed in AIS are active), with the maximum given by the difference between the difference between the size of the IHSF in-service fleet and the number of ships observed on AIS in that type and size category</p> |                    |

### Results

Results are first calculated for each of the ship type and size categories and then aggregated to total uncertainty characterisations for international shipping and for total shipping. The upper and lower bounds applied to the Figures in Section 1.5.2 are obtained as the maximum and minimum values obtained from the Monte Carlo simulation. The statistics of the outputs to that simulation can also be approximated as normal distributions (similar to the uncertainties in the hourly aggregations), and Table 21 lists these for each of the ship type and size categories. The variation in uncertainty between ship types and sizes can be seen, with the lowest uncertainties (standard deviation of approximately 13% of mean) well observed (on AIS) fleets, and those fleets where the total number of ships listed in IHSF closely matches the number of ships observed on AIS (cruise ships, large vehicle carriers, large tankers and bulkers and large container ships). This contrasts with the smallest size general cargo fleet and the smallest tankers (both 0-5000 dwt), which have standard deviations exceeding 20% of the mean estimate. The contrast is even more notable for certain categories of non-merchant shipping (e.g. Miscellaneous – fishing and Miscellaneous other, 37% and 56% respectively), which are poorly observed and

poorly matched in IHSF, although in both cases these are ship types and sizes which are not categorised in this study as international shipping.

**Table 21: Estimated characteristics of the uncertainty for individual ship type and size categories.**

| Typename              | Sizename      | Mean     | Standard Deviation | Standard deviation as a % of mean |
|-----------------------|---------------|----------|--------------------|-----------------------------------|
| Bulk carrier          | 0-9999        | 4484703  | 783207             | 17%                               |
| Bulk carrier          | 10000-34999   | 23406255 | 3572119            | 15%                               |
| Bulk carrier          | 35000-59999   | 43016318 | 6617266            | 15%                               |
| Bulk carrier          | 60000-99999   | 44617850 | 6411213            | 14%                               |
| Bulk carrier          | 100000-199999 | 35363715 | 5188630            | 15%                               |
| Bulk carrier          | 200000+       | 10478638 | 1494526            | 14%                               |
| Chemical tanker       | 0-4999        | 4493655  | 679510             | 15%                               |
| Chemical tanker       | 5000-9999     | 7007269  | 956839             | 14%                               |
| Chemical tanker       | 10000-19999   | 12117662 | 1744680            | 14%                               |
| Chemical tanker       | 20000+        | 29614933 | 4314846            | 15%                               |
| Container             | 0-999         | 12289773 | 1599989            | 13%                               |
| Container             | 1000-1999     | 30532084 | 3913000            | 13%                               |
| Container             | 2000-2999     | 24649848 | 3352376            | 14%                               |
| Container             | 3000-4999     | 52578459 | 6509096            | 12%                               |
| Container             | 5000-7999     | 42436722 | 5480776            | 13%                               |
| Container             | 8000-11999    | 30009753 | 3925368            | 13%                               |
| Container             | 12000-14500   | 8614072  | 1120637            | 13%                               |
| Container             | 14500+        | 776608   | 105888             | 14%                               |
| General cargo         | 0-4999        | 17993881 | 3891076            | 22%                               |
| General cargo         | 5000-9999     | 15937373 | 2326828            | 15%                               |
| General cargo         | 10000+        | 26463128 | 3720868            | 14%                               |
| Liquefied gas tanker  | 0-49999       | 10477872 | 1501513            | 14%                               |
| Liquefied gas tanker  | 50000-199999  | 28390114 | 3641861            | 13%                               |
| Liquefied gas tanker  | 200000+       | 5313632  | 697094             | 13%                               |
| Oil tanker            | 0-4999        | 11244284 | 2391743            | 21%                               |
| Oil tanker            | 5000-9999     | 4339055  | 580383             | 13%                               |
| Oil tanker            | 10000-19999   | 2038769  | 260104             | 13%                               |
| Oil tanker            | 20000-59999   | 12307094 | 1696973            | 14%                               |
| Oil tanker            | 60000-79999   | 9870325  | 1326081            | 13%                               |
| Oil tanker            | 80000-119999  | 25724409 | 3405958            | 13%                               |
| Oil tanker            | 120000-199999 | 16846138 | 2271416            | 13%                               |
| Oil tanker            | 200000+       | 35612562 | 4762621            | 13%                               |
| Other liquids tankers | 0+            | 631061.4 | 222835             | 35%                               |
| Ferry-pax only        | 0-1999        | 8065654  | 1839021            | 23%                               |
| Ferry-pax only        | 2000+         | 937766.4 | 142744             | 15%                               |
| Cruise                | 0-1999        | 765518   | 201026             | 26%                               |

| Typename                | Size name   | Mean     | Standard Deviation | Standard deviation as a % of mean |
|-------------------------|-------------|----------|--------------------|-----------------------------------|
| Cruise                  | 2000-9999   | 541192.7 | 69983              | 13%                               |
| Cruise                  | 10000-59999 | 6777427  | 814564             | 12%                               |
| Cruise                  | 60000-99999 | 15272130 | 1847344            | 12%                               |
| Cruise                  | 100000-+    | 10858883 | 1327775            | 12%                               |
| Ferry-RoPax             | 0-1999      | 3196211  | 728938             | 23%                               |
| Ferry-RoPax             | 2000-+      | 25101829 | 3483843            | 14%                               |
| Refrigerated bulk       | 0-1999      | 15681223 | 2347187            | 15%                               |
| Ro-Ro                   | 0-4999      | 11194992 | 2907801            | 26%                               |
| Ro-Ro                   | 5000-+      | 13214632 | 1585173            | 12%                               |
| Vehicle                 | 0-3999      | 6049479  | 791876             | 13%                               |
| Vehicle                 | 4000-+      | 17618246 | 2094463            | 12%                               |
| Yacht                   | 0-+         | 2903868  | 506778             | 17%                               |
| Service - tug           | 0-+         | 14861465 | 4114117            | 28%                               |
| Miscellaneous - fishing | 0-+         | 31227450 | 11465708           | 37%                               |
| Offshore                | 0-+         | 24875547 | 4053364            | 16%                               |
| Service - other         | 0-+         | 10982136 | 1989317            | 18%                               |
| Miscellaneous - other   | 0-+         | 3750878  | 2112923            | 56%                               |

## Annex 6 (details for Section 2, other GHG emissions and relevant substances)

### Emission Factors

The emissions factors (EF) incorporated into this report build and significantly improve and increases the resolution compared to the IMO GHG Study 2009 by including IMO engine Tiers 0, I, and II, introduces fuel correction factors (FCF) that allow for the estimate of various fuel types (HFO, IFO, MDO, MGO, LNG) with varying fuel sulphur contents, and incorporates load-adjusted emission factors over the entire engine load range.

### Method for selecting/developing baseline and actual emission factors

Available emissions factors were reviewed by the EF working group and the following hierarchy was established:

- IMO published emission factors
- EFs used by consortium members' work were reviewed, discussed, and the selected emission factors were unanimously agreed on

The following pollutants were estimated as part of this study:

- carbon dioxide, CO<sub>2</sub>
- oxides of nitrogen, NO<sub>x</sub>
- sulphur oxides, SO<sub>x</sub>
- particulate matter, PM
- carbon dioxide, CO
- methane, CH<sub>4</sub>
- nitrous oxide, N<sub>2</sub>O
- nonmethane volatile organic compounds, NMVOC

The following methodology was used to develop the baseline and actual emission factors for this study:

- 1 Identify baseline emissions factors with the following hierarchy: IMO emission factors, if none published, then consortium recommended emission factors from other studies that members are using in their published work. Emission factors come in two groups: energy-based in g pollutant/kWh and fuel-based in g pollutant/g fuel consumed. The baseline fuel for the bottom-up emission factors is defined as HFO fuel with 2.7% sulphur content.
- 2 Convert energy-based baseline emissions factors in g pollutant/kWh to fuel-based emission factors in pollutant/ g fuel consumed, as applicable, using:

$$EF_{baseline} (g \text{ pollutant} / g \text{ fuel}) = \frac{EF_{baseline} (g \text{ pollutant} / kWh)}{SFOC_{baseline} (g \text{ fuel} / kWh)}$$

where,

EF<sub>baseline</sub> – cited emission factor

SFOC<sub>baseline</sub> – SFOC associated with the cited emission factor

- 3 Utilize fuel correction factors or FCF, as applicable, to adjust emission factors for the specific fuel being used by the engine.



$$EF_{actual} (g \text{ pollutant}/g \text{ fuel}) = EF_{baseline} (g \text{ pollutant}/g \text{ fuel}) \times FCF$$

Convert to kg pollutant/tonne fuel consumed (for presentation purposes)

- 4 Adjust  $EF_{actual}$  based on variable engine loads using SFOC engine curves and low load adjustment factors to adjust the SFOC.

### Baseline emission factors

Baseline emission factors for main engines, auxiliary engines, and auxiliary boilers are provided in this section. Certain emission factors change based on fuel type (HFO, MDO, MGO) and sulphur content while other remain the same across various fuel types and are not affected by sulphur. The assumed fuel for the  $EF_{baseline}$  presented in this section is HFO with 2.7% sulphur content. The baseline emission factors and associated references are provided in Table 22.

Pollutant and fuel specific notes are provided below:

**CO<sub>2</sub>** – The carbon content of each fuel type is constant and is not affected by engine type, duty cycle, or other parameters when looking on a kg CO<sub>2</sub> per tonne fuel basis. The fuel based CO<sub>2</sub> emissions factors for main and auxiliary engines at slow, medium, and high speeds are based on MEPC 63/23, Annex 8 and include:

|         |  |
|---------|--|
| HFO     | $EF_{baseline} \text{ CO}_2 = 3,114 \text{ kg CO}_2/\text{tonne fuel}$ |
| MDO/MGO | $EF_{baseline} \text{ CO}_2 = 3,206 \text{ kg CO}_2/\text{tonne fuel}$ |
| LNG     | $EF_{baseline} \text{ CO}_2 = 2,750 \text{ kg CO}_2/\text{tonne fuel}$ |

It should be noted that CO<sub>2</sub> emissions are also not affected by sulphur content of the fuel burned. FCFs are not used for CO<sub>2</sub> as IMO has published specific EFs for each fuel type which were used in this study directly.

**CO, CH<sub>4</sub>, NMVOC** – Emissions of methane or CH<sub>4</sub> were determined by analysis of test results reported in IVL 2004 and MARINTEK 2010. Methane emission factors for diesel-fueled engines, steam boilers, and gas turbine are taken from IVL 2004, which states that CH<sub>4</sub> emissions are approximately 2% magnitude of VOC. Therefore, the  $EF_{baseline}$  is derived from multiplying the nonmethane NMVOC  $EF_{baseline}$  by 2%. The CH<sub>4</sub> emission factor for LNG Otto-cycle engines is 8.5 g/kWh, which is on par with the data of LNG engines (MARINTEK, 2010; 2014). However, this value may be slightly low for older gas fuelled engines, especially if run on low engine loads and slightly high for the latest generation of LNG engines (Wartsila, 2011). This emission factor was used in the bottom-up approach to determine the amount of methane released to the atmosphere from each of the vessels power by LNG. It should be noted the LNG NMVOC emission factor was conservatively assumed to be the same as the hydrocarbon emission factor. All LNG engines have been modeled as low-pressure, spark injection Otto-cycle engines, which have low NO<sub>x</sub> emissions. In the study period, 2007 through 2012, the majority of LNG fueled vessels in the world fleet do not use Diesel cycle engines (DNV GL USA, 2013a; 2013b) and AIS/satellite AIS does not indicate which fuel a ship is burning. Further emissions testing on LNG engines in this area would help clarify the above assumptions. These pollutants are not affected by fuel type nor fuel sulphur content and therefore FCFs are not used for these pollutants.

**LNG** – Emissions from LNG fueled Otto cycle engines are different from LNG fueled Diesel cycle engines (e.g., NO<sub>x</sub> reductions associated with LNG fueled Otto cycle

engines are no realized in LNG fueled Diesel cycle engines). In the study period, 2007 through 2012, the majority of LNG fueled vessels in the world fleet do not use Diesel cycle engines (DNV GL USA, 2013a; 2013b) and AIS/satellite AIS does not indicate which fuel a ship is burning. For the IMO GHG Study 2014, we assumed that LNG carriers operated Otto cycle engines and burned boil off and therefore only LNG Otto cycle emissions are used for ships designated as using LNG as a fuel. Depending on how many dual fuel engines enter the world's fleet, future inventories may need to adjust to both LNG fueled Otto and Diesel cycles.

**Table 22: Baseline emission factors.**

| Emission Species | Engine Speed or Type | EF Equation | Main SFOC g/kWh | Main EF g/kWh | Main EF g/g fuel | Main EF kg/tonne | Aux SFOC g/kWh | Aux EF g/kWh | Aux EF g/g fuel | Aux EF kg/tonne | Reference           |                 |
|------------------|----------------------|-------------|-----------------|---------------|------------------|------------------|----------------|--------------|-----------------|-----------------|---------------------|-----------------|
| CO <sub>2</sub>  | Slow                 | 1           | 195             | 607           | 3.114            | 3,114            | na             | na           | na              | na              | MEPC 63/23, Annex 8 |                 |
|                  | Medium               | 1           | 215             | 670           | 3.114            | 3,114            | 227            | 707          | 3.114           | 3,114           | MEPC 63/23, Annex 8 |                 |
|                  | High                 | 1           | na              | na            | na               | na               | 227            | 707          | 3.114           | 3,114           | MEPC 63/23, Annex 8 |                 |
|                  | LNG (Otto)           | 1           | 166             | 457           | 2.750            | 2,750            | 166            | 457          | 2.750           | 2,750           | MEPC 63/23, Annex 8 |                 |
|                  | Gas Turbine          | 1           | 305             | 950           | 3.114            | 3,114            | na             | na           | na              | na              | MEPC 63/23, Annex 8 |                 |
|                  | Steam                | 1           | 305             | 950           | 3.114            | 3,114            | na             | na           | na              | na              | MEPC 63/23, Annex 8 |                 |
| NO <sub>x</sub>  | Slow                 | na          | 195             | 18.1          | 0.093            | 92.82            | na             | na           | na              | na              | ENTEC 2002          |                 |
|                  | T0                   | Medium      | 2               | 215           | 14.0             | 0.065            | 65.12          | 227          | 14.7            | 0.065           | 64.76               | ENTEC 2002      |
|                  |                      | High        | na              | na            | na               | na               | na             | 227          | 11.6            | 0.0511          | 51.10               | ENTEC 2002      |
|                  |                      | Slow        | na              | 195           | 17.0             | 0.09             | 87.18          | na           | na              | na              | na                  | IMO Standard    |
|                  | T1                   | Medium      | 3               | 215           | 13.0             | 0.06047          | 60.47          | 227          | 13.0            | 0.05727         | 57.27               | IMO Standard    |
|                  |                      | High        | na              | na            | na               | na               | na             | 227          | 10.4            | 0.04581         | 45.81               | IMO Standard    |
|                  |                      | Slow        | na              | 195           | 15.3             | 0.07846          | 78.46          | na           | na              | na              | na                  | IMO Standard    |
|                  | T11                  | Medium      | na              | 215           | 11.2             | 0.05209          | 52.09          | 227          | 11.2            | 0.04934         | 49.34               | IMO Standard    |
|                  |                      | High        | na              | na            | na               | na               | na             | 227          | 8.2             | 0.03612         | 36.12               | IMO Standard    |
|                  |                      | LNG (Otto)  | na              | 166           | 1.3              | 0.00783          | 7.83           | 166          | 1.3             | 0.00783         | 7.83                | Kristensen 2012 |
|                  | Gas Turbine          | na          | 305             | 6.1           | 0.020            | 20.00            | na             | na           | na              | na              | IVL 2004            |                 |
|                  | Steam                | na          | 305             | 2.1           | 0.00689          | 6.89             | na             | na           | na              | na              | IVL 2004            |                 |
|                  | SO <sub>x</sub>      | Slow        | 4               | 195           | 10.29            | 0.053            | 52.77          | na           | na              | na              | na                  | Mass balance    |
|                  |                      | Medium      | 4               | 215           | 11.35            | 0.053            | 52.79          | 227          | 11.98           | 0.053           | 52.78               | Mass balance    |
|                  |                      | High        | 4               | na            | na               | na               | na             | 227          | 11.98           | 0.05            | 52.78               | Mass balance    |
| LNG (Otto)       |                      | na          | 166             | 0.00269       | 0.00002          | 0.02             | 166            | 0.00269      | 0.00002         | 0.02            | Kunz & Gorse 2013   |                 |
| Gas Turbine      |                      | 4           | 305             | 16.10         | 0.053            | 52.79            | na             | na           | na              | na              | Mass balance        |                 |
| Steam            |                      | 4           | 305             | 16.10         | 0.053            | 52.79            | na             | na           | na              | na              | Mass balance        |                 |
| PM               | Slow                 | 5           | 195             | 1.42          | 0.00728          | 7.28             | na             | na           | na              | na              | USEPA 2007          |                 |
|                  | Medium               | 5           | 215             | 1.43          | 0.00665          | 6.65             | 227            | 1.44         | 0.00634         | 6.34            | USEPA 2007          |                 |
|                  | High                 | 5           | na              | na            | na               | na               | 227            | 1.44         | 0.00634         | 6.34            | USEPA 2007          |                 |
|                  | LNG (Otto)           | na          | 166             | 0.03          | 0.00018          | 0.18             | 166            | 0.03         | 0.00018         | 0.180           | Kristensen 2012     |                 |
|                  | Gas Turbine          | na          | 305             | 0.06          | 0.00020          | 0.20             | na             | na           | na              | na              | IVL 2004            |                 |
|                  | Steam                | na          | 305             | 0.93          | 0.00305          | 3.05             | na             | na           | na              | na              | IVL 2004            |                 |
| CO               | Slow                 | na          | 195             | 0.54          | 0.0028           | 2.77             | na             | na           | na              | na              | Sarvi et al 2008    |                 |
|                  | Medium               | na          | 215             | 0.54          | 0.0025           | 2.51             | 227            | 0.54         | 0.0024          | 2.38            | Sarvi et al 2008    |                 |
|                  | High                 | na          | na              | na            | na               | na               | 227            | 0.54         | 0.00238         | 2.38            | Sarvi et al 2008    |                 |
|                  | LNG (Otto)           | na          | 166             | 1.30          | 0.00783          | 7.83             | 166            | 1.30         | 0.00783         | 7.83            | Kristensen 2012     |                 |
|                  | Gas Turbine          | na          | 305             | 0.10          | 0.00033          | 0.33             | na             | na           | na              | na              | IVL 2004            |                 |
|                  | Steam                | na          | 305             | 0.20          | 0.00066          | 0.66             | na             | na           | na              | na              | IVL 2004            |                 |
| CH <sub>4</sub>  | Slow                 | 6           | 195             | 0.012         | 0.00006          | 0.06             | na             | na           | na              | na              | IVL 2004            |                 |
|                  | Medium               | 6           | 215             | 0.01          | 0.00005          | 0.05             | 227            | 0.008        | 0.00004         | 0.04            | IVL 2004            |                 |
|                  | High                 | 6           | na              | na            | na               | na               | 227            | 0.008        | 0.00004         | 0.04            | IVL 2004            |                 |
|                  | LNG (Otto)           | na          | 166             | 8.50          | 0.0512           | 51.2             | 166            | 8.50         | 0.0512          | 51.2            | MARINTEK 2010       |                 |
|                  | Gas Turbine          | 6           | 305             | 0.002         | 0.00001          | 0.01             | na             | na           | na              | na              | IVL 2004            |                 |
|                  | Steam                | 6           | 305             | 0.002         | 0.00001          | 0.01             | na             | na           | na              | na              | IVL 2004            |                 |
| N <sub>2</sub> O | Slow                 | 7           | 195             | 0.031         | 0.00016          | 0.16             | na             | na           | na              | na              | USEPA 2014          |                 |
|                  | Medium               | 7           | 215             | 0.034         | 0.00016          | 0.16             | 227            | 0.036        | 0.00016         | 0.16            | USEPA 2014          |                 |
|                  | High                 | 7           | na              | na            | na               | na               | 227            | 0.036        | 0.00016         | 0.16            | USEPA 2014          |                 |
|                  | LNG (Otto)           | 7           | 166             | 0.018         | 0.00011          | 0.11             | 166            | 0.018        | 0.00011         | 0.11            | Kunz & Gorse 2013   |                 |
|                  | Gas Turbine          | 7           | 305             | 0.049         | 0.00016          | 0.16             | na             | na           | na              | na              | USEPA 2014          |                 |
|                  | Steam                | 7           | 305             | 0.049         | 0.00016          | 0.16             | na             | na           | na              | na              | USEPA 2014          |                 |
| NMVOC            | Slow                 | na          | 195             | 0.60          | 0.00308          | 3.08             | na             | na           | na              | na              | ENTEC 2002          |                 |
|                  | Medium               | na          | 215             | 0.50          | 0.00233          | 2.33             | 227            | 0.40         | 0.00176         | 1.76            | ENTEC 2002          |                 |
|                  | High                 | na          | na              | na            | na               | na               | 227            | 0.4          | 0.00176         | 1.76            | ENTEC 2002          |                 |
|                  | LNG (Otto)           | na          | 166             | 0.50          | 0.00301          | 3.01             | 166            | 0.50         | 0.00301         | 3.01            | Kristensen 2012     |                 |
|                  | Gas Turbine          | na          | 305             | 0.10          | 0.00033          | 0.33             | na             | na           | na              | na              | ENTEC 2002          |                 |
|                  | Steam                | na          | 305             | 0.10          | 0.00033          | 0.33             | na             | na           | na              | na              | ENTEC 2002          |                 |

---

|            |  |
|------------|--|
| Equation 1 | $CO_2 \text{ g/kWh} = 3.114 \text{ g } CO_2/\text{g fuel} \times \text{SFOC g fuel/kWh}$   |
| Equation 2 | IMO Tier I NO <sub>x</sub> standard for engines speed (n) in rpm between $130 \leq n < 2,000$ (assumed 500 rpm)<br>$NO_x \text{ g/kWh} = 45 \times n^{-0.20}$  |
| Equation 3 | IMO Tier II NO <sub>x</sub> standard for engines speed (n) in rpm between $130 \leq n < 2,000$ (assumed 500 rpm)<br>$NO_x \text{ g/kWh} = 44 \times n^{-0.23}$   |
| Equation 4 | $SO_x \text{ g/kWh} = \text{SFOC g fuel/kWh} \times 2 \times 0.97753 \times \% \text{ Fuel Sulfur Fraction}$<br>where, 0.97753 is the fraction of fuel S converted to SO <sub>x</sub> and 2 is the ratio of molecular weight of SO <sub>x</sub> and S                                      |
| Equation 5 | For HFO fuel,<br>$PM \text{ g/kWh} = 1.35 + \text{SFOC g fuel/kWh} \times 7 \times 0.02247 \times (\text{Fuel Sulfur Fraction} - 0.0246)$<br>For MDO/MGO fuel,<br>$PM \text{ g/kWh} = 0.23 + \text{SFOC g fuel/kWh} \times 7 \times 0.02247 \times (\text{Fuel Sulfur Fraction} - 0.0024)$ |
| Equation 6 | $CH_4 \text{ g/kWh} = \text{NMVOC EF g/kWh} \times 0.02$   |
| Equation 7 | $N_2O \text{ g/kWh} = 0.16 \times \text{SFOC g fuel/kWh}/1,000$  |

---

Notes: Base fuel assumption: HFO 2.7% sulphur

### SFOCs

To develop fuel –based baseline emission factors in g pollutant/g fuel or kg pollutant/tonne fuel, the cited energy-based baseline emission factor (g pollutant/kWh) needed to be divided by a related SFOC. In general, energy-based baseline emission factors and SFOCs were derived from IVL 2004, which analyzed ENTEC 2002. The exceptions to this rule are for LNG powered engine and diesel-cycle NO<sub>x</sub> emissions. The LNG SFOC used for this study was 166 grams of fuel/tonne fuel (Wärtsilä, 2014).

IMO has capped NO<sub>x</sub> emission rates for Tier I and II engines through regulation and expressed the emission limits with energy-based emission factors. Since there is no related SFOC, we used the SFOCs for NO<sub>x</sub>, relating to diesel-cycle main and auxiliary engines, presented in Table 23. It should be noted that for the other pollutants, baseline emission factor-related SFOCs were used to convert to the fuel-based baseline emission factors and that the efficiencies associated with Tier I and II engines is captured by the use of the Tier-related SFOCs when estimating emissions over a given distance and/or time.

**Table 23: IMO Tier I and II SFOC assumptions for NO<sub>x</sub> baseline emission factors.**

| Engine Type | IMO Tier | Rated Speed | SFOC g/kW-hr |
|-------------|----------|-------------|--------------|
| Main        | I        | SSD         | 195          |
|             | I        | MSD         | 215          |
|             | II       | SSD         | 195          |
|             | II       | MSD         | 215          |
| Aux         | I        | MSD/HSD     | 227          |
|             | II       | MSD/HSD     | 227          |

The baseline emission-factor SFOC-related to the energy-based baseline emission factors depends on the rated speed of the engine, fuel type, and if the engine is used for propulsion or auxiliary service. The related SFOCs associated with the energy-related baseline emission factors are presented in Table 24.

**Table 24: EF Related SFOCs used to convert energy-based baseline emission factors to fuel-based.**

| Engine Type      | Rated Speed | Fuel    | SFOC<br>g/kW-hr | Source        |
|------------------|-------------|---------|-----------------|---------------|
| Main/SSD         | SSD         | HFO     | 195             | IVL 2004      |
|                  |             | MGO/MDO | 185             | IVL 2004      |
| Main/MSD         | MSD         | HFO     | 215             | IVL 2004      |
|                  |             | MGO/MDO | 205             | IVL 2004      |
| Main/HSD         | HSD         | HFO     | 215             | IVL 2004      |
|                  |             | MGO/MDO | 205             | IVL 2004      |
| Aux MSD & HSD    | MSD/HSD     | HFO     | 227             | IVL 2004      |
|                  |             | MGO/MDO | 217             | IVL 2004      |
| Gas Turbine      | all         | HFO     | 305             | IVL 2004      |
|                  |             | MGO/MDO | 300             | IVL 2004      |
| Steam Boilers    | na          | HFO     | 305             | IVL 2004      |
|                  |             | MGO/MDO | 300             | IVL 2004      |
| LNG (Otto Cycle) | na          | LNG     | 166             | Wärtsilä 2014 |

It should be noted that for all pollutants (except NO<sub>x</sub> and LNG powered engines) the baseline emission factor-related SFOCs were used to convert to the fuel-based baseline emission factors and that the efficiencies associated with Tier I and II engines is captured by the use of the Tier-related SFOCs when estimating emissions over a given distance and/or time.

**Fuel Correction Factors – NO<sub>x</sub>, SO<sub>x</sub>, PM, N<sub>2</sub>O**

As stated above, fuel correction factors or FCFs are not used for CO<sub>2</sub>, CO, CH<sub>4</sub>, and NMVOC. Fuel correction factors are applied to a baseline emission factor to adjust baseline emission factors for changes in fuel type and/or sulphur content. The following tables provide examples of FCFs between fuel types and representative sulphur contents.

Base fuel: HFO 2.7% sulphur content

Target fuel: HFO and MDO with IMO annual sulphur contents (2007-2012)

**Table 25: IMO Annual average global sulphur contents.**

| <b>% Sulfur Content Averages - IMO</b>    |             |             |             |             |             |             |
|---|-------------|-------------|-------------|-------------|-------------|-------------|
| <b>Fuel Type</b>                          | <b>2007</b> | <b>2008</b> | <b>2009</b> | <b>2010</b> | <b>2011</b> | <b>2012</b> |
| Non ECA Average HFO S%                    | 2.42        | 2.37        | 2.60        | 2.61        | 2.65        | 2.51        |
| Global Average MDO/MGO S%                 | 0.15        | 0.15        | 0.15        | 0.15        | 0.14        | 0.14        |
| <b>% Sulfur Content ECA &amp; Base EF</b> |             |             |             |             |             |             |
| <b>Fuel Type</b>                          | <b>2007</b> | <b>2008</b> | <b>2009</b> | <b>2010</b> | <b>2011</b> | <b>2012</b> |
| ECA S%                                    | 1.00        | 1.00        | 1.00        | 1.00        | 1.00        | 1.00        |
| Base EF HFO S%                            | 2.70        | 2.70        | 2.70        | 2.70        | 2.70        | 2.70        |

Table 26: NOx FCFs –HFO global sulphur averages.

| <b>Engine Type</b>   | <b>2007</b> | <b>2008</b> | <b>2009</b> | <b>2010</b> | <b>2011</b> | <b>2012</b> |
|----------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| <b>HFO Sulphur %</b> | <b>2.42</b> | <b>2.37</b> | <b>2.60</b> | <b>2.61</b> | <b>2.65</b> | <b>2.51</b> |
| Main SSD             | 1.00        | 1.00        | 1.00        | 1.00        | 1.00        | 1.00        |
| Main MSD             | 1.00        | 1.00        | 1.00        | 1.00        | 1.00        | 1.00        |
| Aux MSD              | 1.00        | 1.00        | 1.00        | 1.00        | 1.00        | 1.00        |
| Aux HSD              | 1.00        | 1.00        | 1.00        | 1.00        | 1.00        | 1.00        |
| GT                   | 1.00        | 1.00        | 1.00        | 1.00        | 1.00        | 1.00        |
| ST                   | 1.00        | 1.00        | 1.00        | 1.00        | 1.00        | 1.00        |

Table 27: NOx FCFs – MGO global sulphur averages.

| <b>Fuel_Type</b>         | <b>2007</b> | <b>2008</b> | <b>2009</b> | <b>2010</b> | <b>2011</b> | <b>2012</b> |
|--------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| <b>MDO/MGO Sulphur %</b> | <b>0.15</b> | <b>0.15</b> | <b>0.15</b> | <b>0.15</b> | <b>0.14</b> | <b>0.14</b> |
| Main SSD                 | 0.94        | 0.94        | 0.94        | 0.94        | 0.94        | 0.94        |
| Main MSD                 | 0.94        | 0.94        | 0.94        | 0.94        | 0.94        | 0.94        |
| Aux MSD                  | 0.94        | 0.94        | 0.94        | 0.94        | 0.94        | 0.94        |
| Aux HSD                  | 0.94        | 0.94        | 0.94        | 0.94        | 0.94        | 0.94        |
| GT                       | 0.97        | 0.97        | 0.97        | 0.97        | 0.97        | 0.97        |
| ST                       | 0.95        | 0.95        | 0.95        | 0.95        | 0.95        | 0.95        |

Table 28: SOx FCFs –HFO global sulphur averages.

| <b>Engine Type</b>   | <b>2007</b> | <b>2008</b> | <b>2009</b> | <b>2010</b> | <b>2011</b> | <b>2012</b> |
|----------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| <b>HFO Sulphur %</b> | <b>2.42</b> | <b>2.37</b> | <b>2.6</b>  | <b>2.61</b> | <b>2.65</b> | <b>2.51</b> |
| Main SSD             | 0.90        | 0.88        | 0.96        | 0.97        | 0.98        | 0.93        |
| Main MSD             | 0.90        | 0.88        | 0.96        | 0.97        | 0.98        | 0.93        |
| Aux MSD              | 0.90        | 0.88        | 0.96        | 0.97        | 0.98        | 0.93        |
| Aux HSD              | 0.90        | 0.88        | 0.96        | 0.97        | 0.98        | 0.93        |
| GT                   | 0.90        | 0.88        | 0.96        | 0.97        | 0.98        | 0.93        |
| ST                   | 0.90        | 0.88        | 0.96        | 0.97        | 0.98        | 0.93        |

Table 29: SOx FCFs – MGO global Sulphur averages.

| <b>Engine Type</b>       | <b>2007</b> | <b>2008</b> | <b>2009</b> | <b>2010</b> | <b>2011</b> | <b>2012</b> |
|--------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| <b>MDO/MGO Sulphur %</b> | <b>0.15</b> | <b>0.15</b> | <b>0.15</b> | <b>0.15</b> | <b>0.14</b> | <b>0.14</b> |
| Main SSD                 | 0.05        | 0.05        | 0.05        | 0.05        | 0.05        | 0.05        |
| Main MSD                 | 0.05        | 0.05        | 0.05        | 0.05        | 0.05        | 0.05        |
| Aux MSD                  | 0.05        | 0.05        | 0.05        | 0.05        | 0.05        | 0.05        |
| Aux HSD                  | 0.05        | 0.05        | 0.05        | 0.05        | 0.05        | 0.05        |
| GT                       | 0.05        | 0.05        | 0.05        | 0.05        | 0.05        | 0.05        |
| ST                       | 0.05        | 0.05        | 0.05        | 0.05        | 0.05        | 0.05        |

**Table 30: PM FCFs –HFO global sulphur averages.**

| <b>Engine Type</b>   | <b>2007</b> | <b>2008</b> | <b>2009</b> | <b>2010</b> | <b>2011</b> | <b>2012</b> |
|----------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| <b>HFO Sulphur %</b> | <b>2.42</b> | <b>2.37</b> | <b>2.60</b> | <b>2.61</b> | <b>2.65</b> | <b>2.51</b> |
| Main SSD             | 0.94        | 0.93        | 0.98        | 0.98        | 0.99        | 0.96        |
| Main MSD             | 0.93        | 0.92        | 0.98        | 0.98        | 0.99        | 0.96        |
| Aux MSD              | 0.93        | 0.92        | 0.98        | 0.98        | 0.99        | 0.95        |
| Aux HSD              | 0.93        | 0.92        | 0.98        | 0.98        | 0.99        | 0.95        |
| GT                   | 0.91        | 0.89        | 0.97        | 0.97        | 0.98        | 0.94        |
| ST                   | 0.91        | 0.89        | 0.97        | 0.97        | 0.98        | 0.94        |

**Table 31: PM FCFs – MGO global sulphur averages.**

| <b>Engine Type</b>       | <b>2007</b> | <b>2008</b> | <b>2009</b> | <b>2010</b> | <b>2011</b> | <b>2012</b> |
|--------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| <b>MDO/MGO Sulphur %</b> | <b>0.15</b> | <b>0.15</b> | <b>0.15</b> | <b>0.15</b> | <b>0.14</b> | <b>0.14</b> |
| Main SSD                 | 0.14        | 0.14        | 0.14        | 0.14        | 0.14        | 0.14        |
| Main MSD                 | 0.14        | 0.14        | 0.14        | 0.14        | 0.14        | 0.14        |
| Aux MSD                  | 0.14        | 0.14        | 0.14        | 0.14        | 0.14        | 0.14        |
| Aux HSD                  | 0.14        | 0.14        | 0.14        | 0.14        | 0.14        | 0.14        |
| GT                       | 0.13        | 0.13        | 0.13        | 0.13        | 0.12        | 0.12        |
| ST                       | 0.13        | 0.13        | 0.13        | 0.13        | 0.12        | 0.12        |

The actual bottom-up emission factors (assumed at 75% engine load) for all non-sulphur dependent pollutants are presented in Error! Reference source not found. and SO<sub>x</sub> and PM are presented in

(see Table 22 for more details). As noted above, SO<sub>x</sub> and PM emission factors vary dependent of the sulphur content in the fuels consumed. MEPC annual reports from the Sulphur Monitoring Program were used to determine the average sulphur content for both HFO and MDO/MGO fuels from 2007 to 2012. For regional variations driven by regulation (ECAs), the fuel sulphur content is assumed to be equivalent to the minimum regulatory requirement (see the description in Section 1.2 on how the shipping activity is attributed to different global regions). All bottom-up emission factors are further adjusted by engine load base on the activity data.

**Table 32: Emission factors for bottom-up emissions due to the combustion of fuels.**

| <b>Emissions species</b>         | <b>Marine HFO emissions factor (g/gfuel)</b> | <b>Marine MDO emissions factor (g/gfuel)</b> | <b>Marine LNG emissions factor (g/gfuel)</b> |
|----------------------------------|--|--|--|
| <b>CO<sub>2</sub></b>            | 3.11400                                      | 3.20600                                      | 2.75000                                      |
| <b>CH<sub>4</sub></b>            | 0.00006                                      | 0.00006                                      | 0.05120                                      |
| <b>N<sub>2</sub>O</b>            | 0.00016                                      | 0.00015                                      | 0.00011                                      |
| <b>NO<sub>x</sub> Tier 0 SSD</b> | 0.09282                                      | 0.08725                                      | 0.00783                                      |
| <b>NO<sub>x</sub> Tier 1 SSD</b> | 0.08718                                      | 0.08195                                      | 0.00783                                      |
| <b>NO<sub>x</sub> Tier 2 SSD</b> | 0.07846                                      | 0.07375                                      | 0.00783                                      |
| <b>NO<sub>x</sub> Tier 0 MSD</b> | 0.06512                                      | 0.06121                                      | 0.00783                                      |
| <b>NO<sub>x</sub> Tier 1 MSD</b> | 0.06047                                      | 0.05684                                      | 0.00783                                      |
| <b>NO<sub>x</sub> Tier 2 MSD</b> | 0.05209                                      | 0.04896                                      | 0.00783                                      |
| <b>CO</b>                        | 0.00277                                      | 0.00277                                      | 0.00783                                      |
| <b>NMVOC</b>                     | 0.00308                                      | 0.00308                                      | 0.00301                                      |

Table 33: Year-specific bottom-up emission factors for SO<sub>x</sub> and PM.

| Fuel Type                     | <sup>1</sup> % Sulfur Content Averages - IMO |         |         |         |         |         |
|-------------------------------|--|---------|---------|---------|---------|---------|
|                               | 2007   | 2008    | 2009    | 2010    | 2011    | 2012    |
| Average Non-ECA HFO S%        | 2.42   | 2.37    | 2.6     | 2.61    | 2.65    | 2.51    |
| SO <sub>x</sub> EF (g/g fuel) |  |         |         |         |         |         |
| Marine Fuel Oil (HFO)         | 0.04749                                      | 0.04644 | 0.05066 | 0.05119 | 0.05171 | 0.04908 |
| Marine Gas Oil (MDO)          | 0.00264                                      | 0.00264 | 0.00264 | 0.00264 | 0.00264 | 0.00264 |
| Natural Gas (LNG)             | 0.00002                                      | 0.00002 | 0.00002 | 0.00002 | 0.00002 | 0.00002 |
| PM EF (g/g fuel)              |  |         |         |         |         |         |
| Marine Fuel Oil (HFO)         | 0.00684                                      | 0.00677 | 0.00713 | 0.00713 | 0.00721 | 0.00699 |
| Marine Gas Oil (MDO)          | 0.00102                                      | 0.00102 | 0.00102 | 0.00102 | 0.00102 | 0.00102 |
| Natural Gas (LNG)             | 0.00018                                      | 0.00018 | 0.00018 | 0.00018 | 0.00018 | 0.00018 |

Source: <sup>1</sup> MEPC's annual reports on Sulfur Monitoring Program

## Annex 7 (details for Section 3)

### The emissions projection model

The model used to project emissions starts with a projection of transport demand, building on long-term socio-economic scenarios developed for the IPCC. Taking into account developments in fleet productivity and ship size, it projects the fleet composition in each year. Subsequently, it projects energy demand taking into account regulatory and autonomous efficiency improvements. Combined with the fuel mix, fuel consumption is calculated which, in combination with emission factors, yields the emissions. Emissions are presented both in aggregate and per ship type and size category.

A graphical presentation of the emissions projection model is shown in Figure 32.

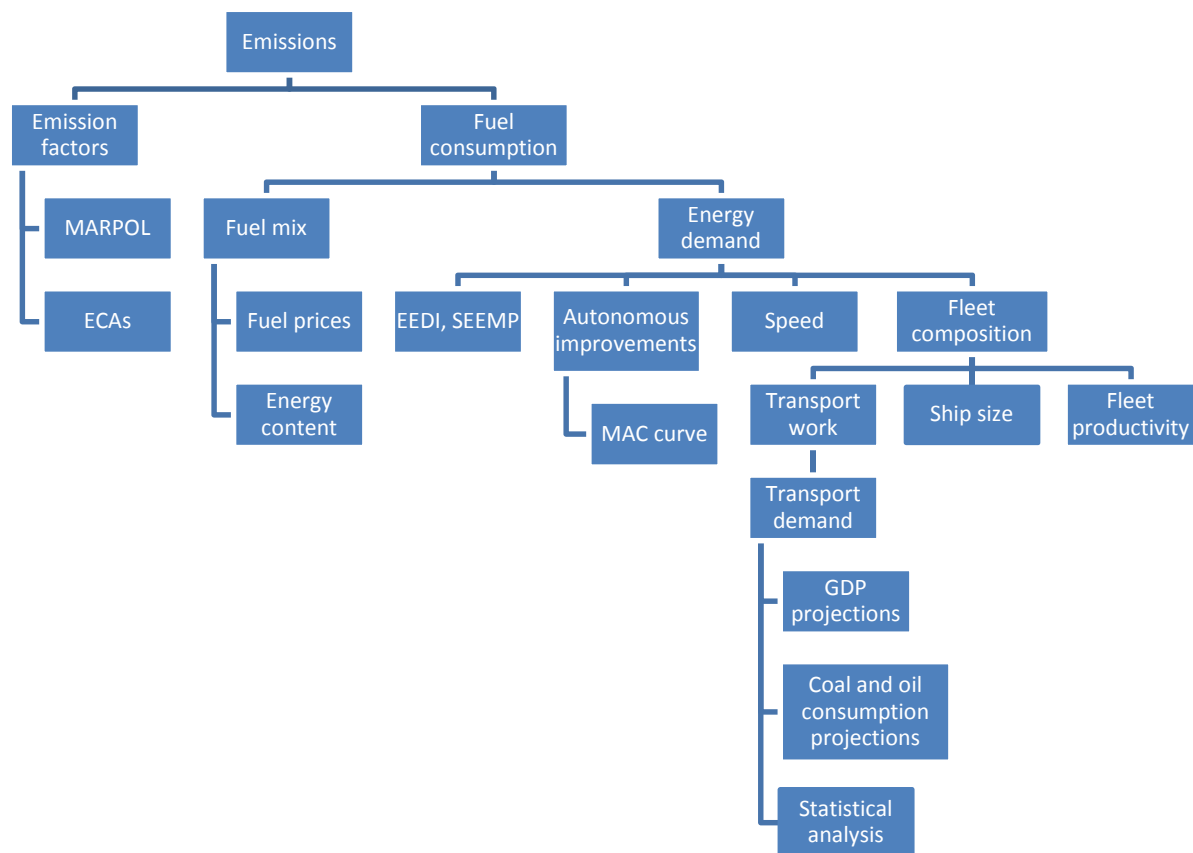


Figure 32: Schematic presentation of emissions projection model

Each of the factors is described in more detail below.

### Analysis of historical transport work data

#### Introduction

Historical data on seaborne trade from a number of different cargo types from 1970 to 2012 have been used to project future trade in terms of three different types of cargo, and total seaborne trade (TST) out to 2050 using a non-linear regression model. The model used is a Verhulst model of the sigmoid curve type, which simulates the three typical phases of economic markets, i.e. emergence, maturation and saturation.



## Methodology

Global data on seaborne transport are produced on a routine basis by the United Nations Conference on Trade and Development (UNCTAD) as part of their annual 'Review of Maritime Transport', which has been produced since 1968 (e.g. UNCTAD, 2013). The UNCTAD Secretariat kindly provided annual data back to 1970. These data were in tonne-miles, so are more satisfactory than transport volume in tonnes (although highly correlated), since this is a better measure of transport work performed.

The data included the following cargo types: crude oil, other oil products, iron ore, coal, grain, bauxite and alumina, phosphate, other dry cargoes. By interpretation, these categories can be usefully combined to: total oil, coal, total (non-coal) bulk dry goods, total dry goods, which approximate to three different ship types of tankers, bulk raw material ships, container (and other) ships but discriminating between fossil-fuel transport and non-fossil fuel transport.

Data for bauxite and alumina, and phosphate were only available from 1987 on, so have been backfilled in a simplistic manner; bauxite and alumina from a simple linear trend, and phosphate as an average of the 1987 to 2008 data, as the time-series appears to be stationary.

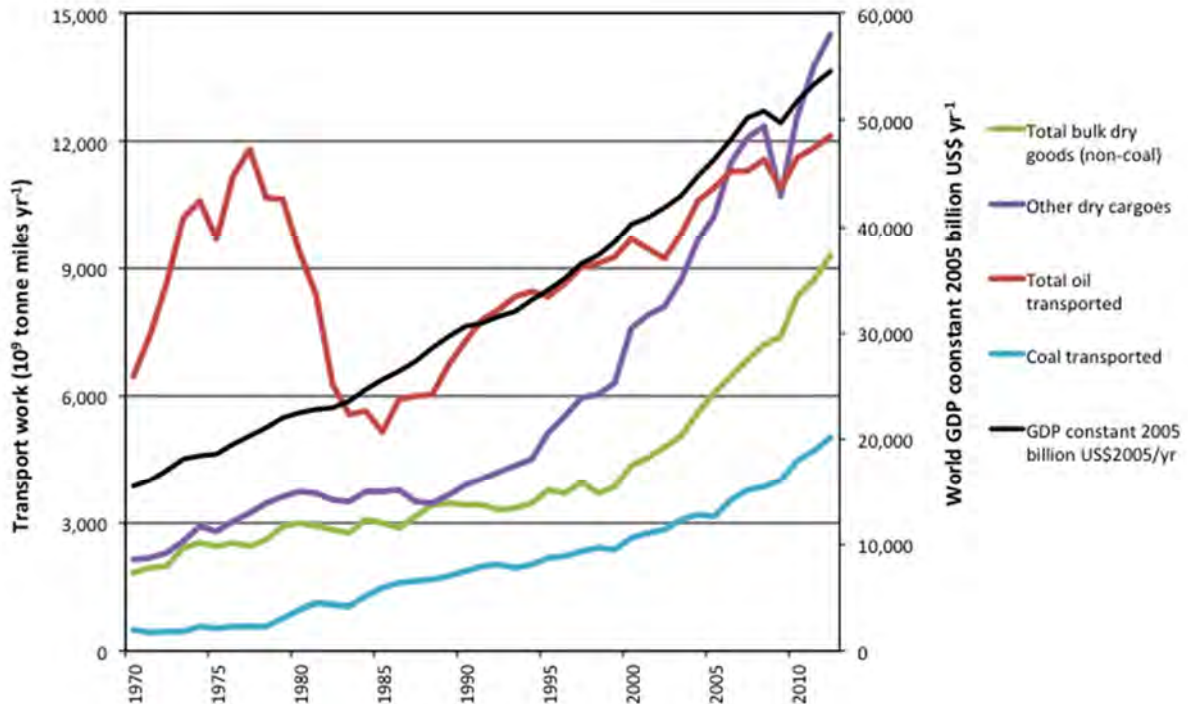


Figure 33: Transport work for all categories of cargo provided by UNCTAD, 1970 to 2012 in billion tonne-miles, also illustrated with global GDP (right hand axis) in billion US\$ (constant 2005 prices).

From Figure 1 it is apparent why previous studies (Eyring et al., 2005; Eide et al, 2007; Buhaug et al., 2009) have only used TST data from 1985 on; there is an extreme excursion of the TST over the period 1970 to 1985, which is entirely caused by the crude oil seaborne trade and was driven by a number of political and economic factors, some of which are connected with the political situation over oil prices during this period. Moreover, the tanker sector was extremely volatile over this period (Stopford, 2009), with an over-supply of ships that in some cases led to ships being scrapped straight after being produced, and some being laid up uncompleted. The volatile situation in the Middle East also led to avoidance of the Suez Canal, and

ships also increased dramatically in size such that the Panama Canal became un-navigable for some ships. Therefore, the period 1970 to 1985 is known to have a particular explicable data excursion for tonne-miles of crude oil, so that those data were excluded from the analysis.

Historical data on global GDP were obtained and GDP projection data for the five SSP scenarios obtained from the IIASA website. The GDP projection data are already shown in Chapter 3. For liquid fossil fuels (essentially, oil) and coal, relationships with historical global oil and coal consumption were constructed.

Previous studies, e.g. Eyring et al. (2005) and Eide et al. (2007) have based projections on linear regression models. Non-linear statistical models have been used for some time in long-term projections of aviation. Such models are often referred to as 'logistic models', or more simply 'non-linear regression models'. A range of these models exists, such as the Verhulst or Gompertz models, and they are commonly used in the econometric literature where the requirement is to simulate some form of market saturation (Jarne et al., 2005).

The sigmoid curve mimics the historical evolution of many markets with three typical phases: emergence, inflexion (maturation), and saturation where the period of expansion and contraction are equal with symmetrical emergent and saturation phases. The phase first involves accelerated growth; the second, approximately linear growth; and the third decelerated growth. Logistic functions are characterized by constantly declining growth rates. The Verhulst function is particularly attractive as it calculates its own asymptote from the data and is described as follows, where  $x$  is the future demand and  $t$  is time in years and  $a$ ,  $b$  and  $c$  are model constants:

$$x = a / (1 + b * \exp(-c * t)) \quad [3]$$

The constants  $a$ ,  $b$ , and  $c$  are estimated from initial guesses of asymptote, intercept and slope, and solved by converged iterative solution. SPSS v19 provided a suitable program for this model.

Different ship types are quite different in size, power, and market growth rates, so that individual models were derived for each transport type.

## Results

The ratios of TST in tonne-miles to GDP for the four different cargo types (total oil, coal, total (non-coal) bulk dry goods, and other dry goods) are shown Figure 2.

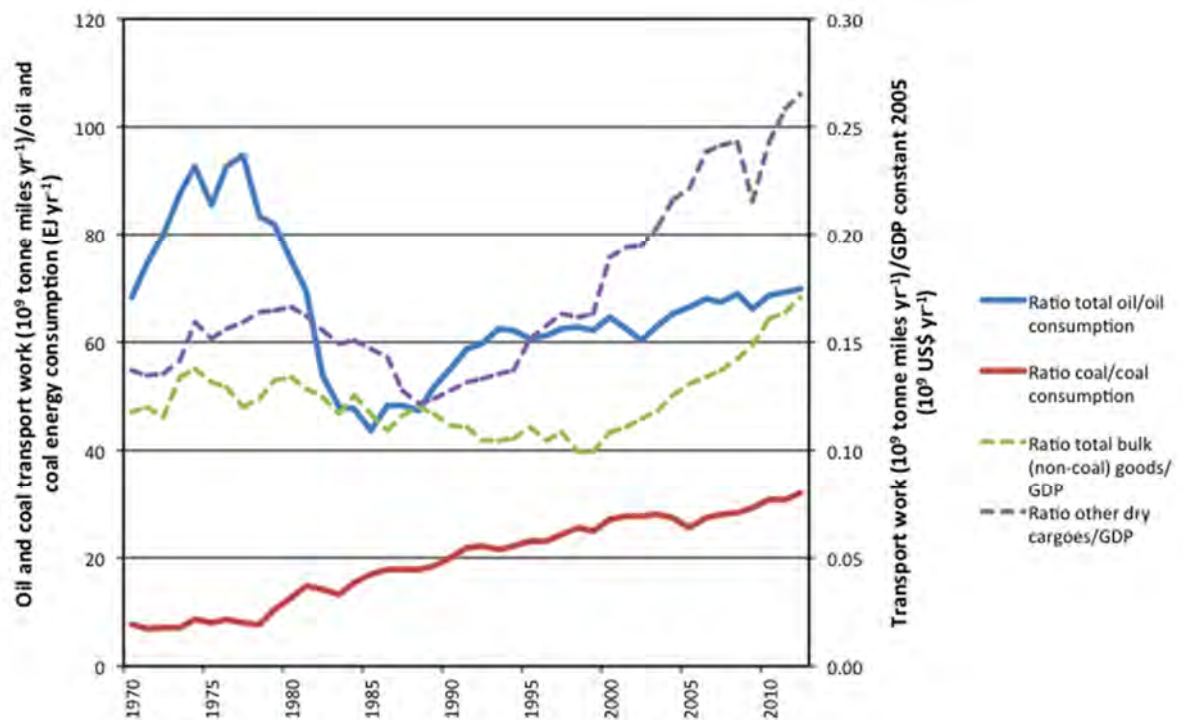


Figure 34: Ratios of TST (different sub-types) in billion tonne-miles to historic global GDP in US\$ (constant 2005 prices) and coal/oil consumption (from BP Statistical Review).

Figure 34 shows set of complex signals; the pattern of growth in oil transported between 1970 and 1985 has already been mentioned, and its reason for exclusion from the model construction. Statistically significant and robust Verhulst models were calculated for the four main cargo types, and the future ratios growth curves shown, as calculated, in Figure 35.

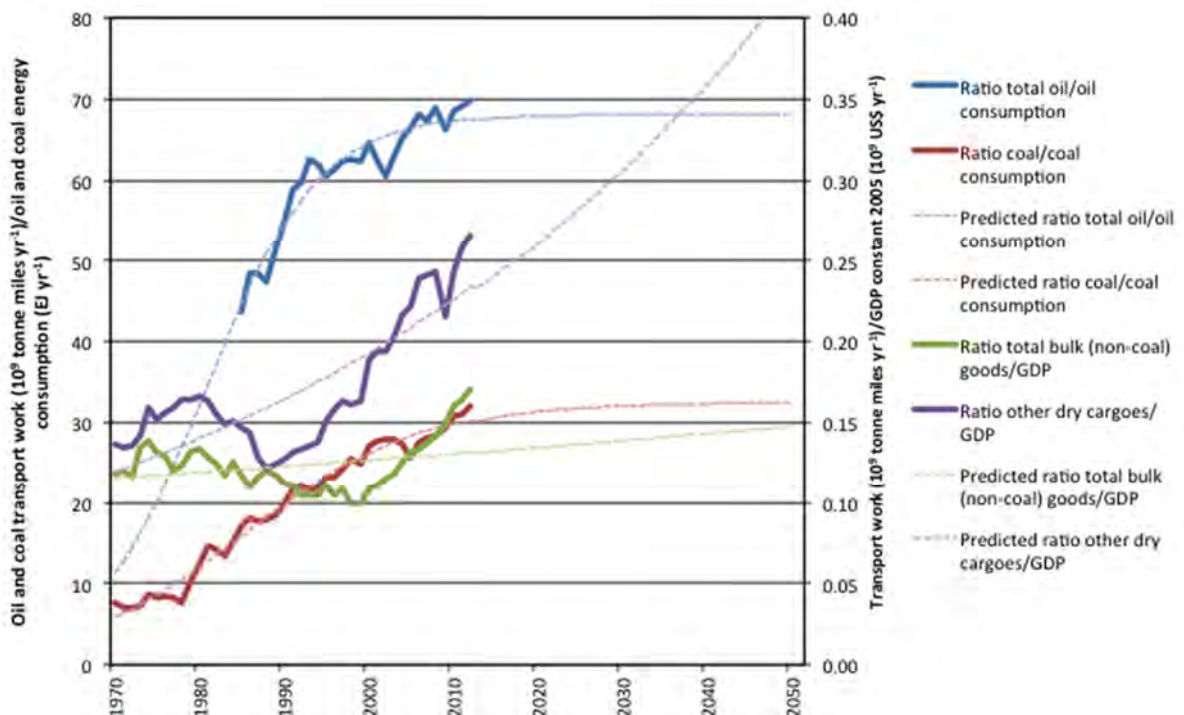


Figure 35: Historical and modelled growth curves to 2050 for ratios of total oil, coal, total (non-coal) bulk dry goods, and other dry cargoes.

Figure 34 shows that future growth rates of TST can be successfully modelled in a non-linear fashion, which is more realistic than the conventional linear model, by three different cargo types. This is a distinct advantage for the next step of assembling a simplified modelling system of future emissions.

#### **Sensitivities**

Removing the period 1970 – 1985 from the total oil model results in an early maturation of total oil. However, even when these data are included, despite the model being not as statistically robust, early maturation is still shown. The weakest model is that of the total (non-coal) dry goods, as the ratio to GDP is almost constant over time, with only a weak linear or non-linear increase. However, a linear model is statistically significant but does not indicate growth (in ratio) much different to that of the non-linear model. The ratio of other dry cargoes also shows something of an excursion over the period 1970 to 1985; however, this is not as easy to explain (in terms of physical events/changes in the underlying data) from known causes, as is the case for total oil. However, if this period is removed, the non-linear model indicates a growth in ratio twice that of the model that includes the entire data series. Given that the explanation for this excursion is less easy than that of total oil, a conservative approach has been adopted that includes the entire data series, resulting in a lower ratio projection. However, it should be remembered that in the projections, the proxy data (i.e. oil, coal consumption, GDP projections) are highly influential in the end ship traffic projections, and in the case of GDP, tend to dominate the calculations.

#### **Fleet productivity projections**

For the emissions projection, the development of the tonnage of the different ship types is determined by a projection of the productivity of the ships (highlighted red in the schematic presentation of the model structure), defined as transport work per deadweight tonne.

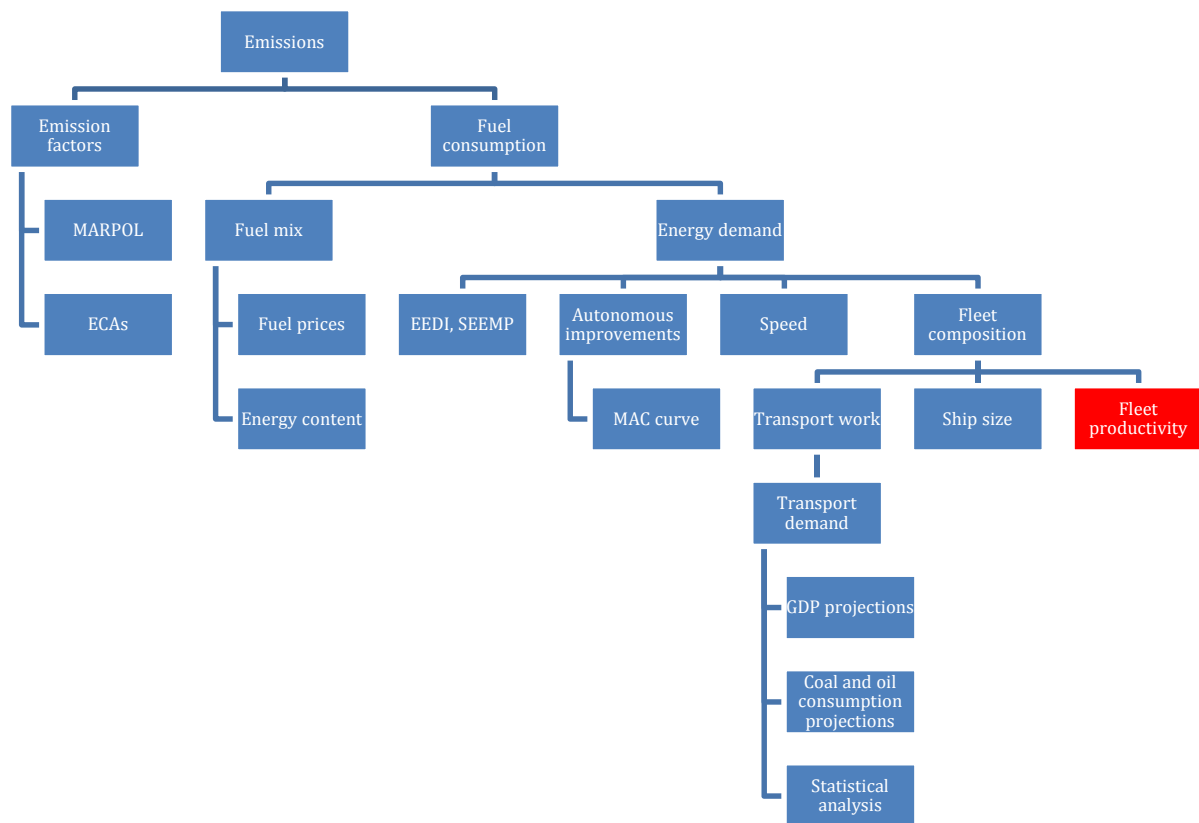


Figure 36: The role of fleet productivity in the model structure.

More precisely, the fleet is assumed to grow if, given the projected productivity, the expected transport demand could not be met by the fleet. On the other hand, if, given the projected productivity, the expected transport demand could be met by a smaller fleet, the active fleet is not assumed to decrease. That means that ships are assumed to reduce their cargo load factor, i.e. become less productive, rather than being scrapped/laid up or reducing their speed.

The projection of the ship productivity is based on the historical productivity of the ship types.

#### Historical Ship Productivity

A look at the historical productivity of the total world fleet reveals that it has seen dramatic variations over the last five decades. During this period, the fleet's productivity peaked in the early seventies with 35,000 tonne-miles per dwt and reached a minimum in the mid eighties with 22,000 tonne-miles per dwt (Stopford, 2009). The productivity then increased until 2005/2006 but was far from reaching the peak from the early seventies. Since then the productivity again shows a falling trend.

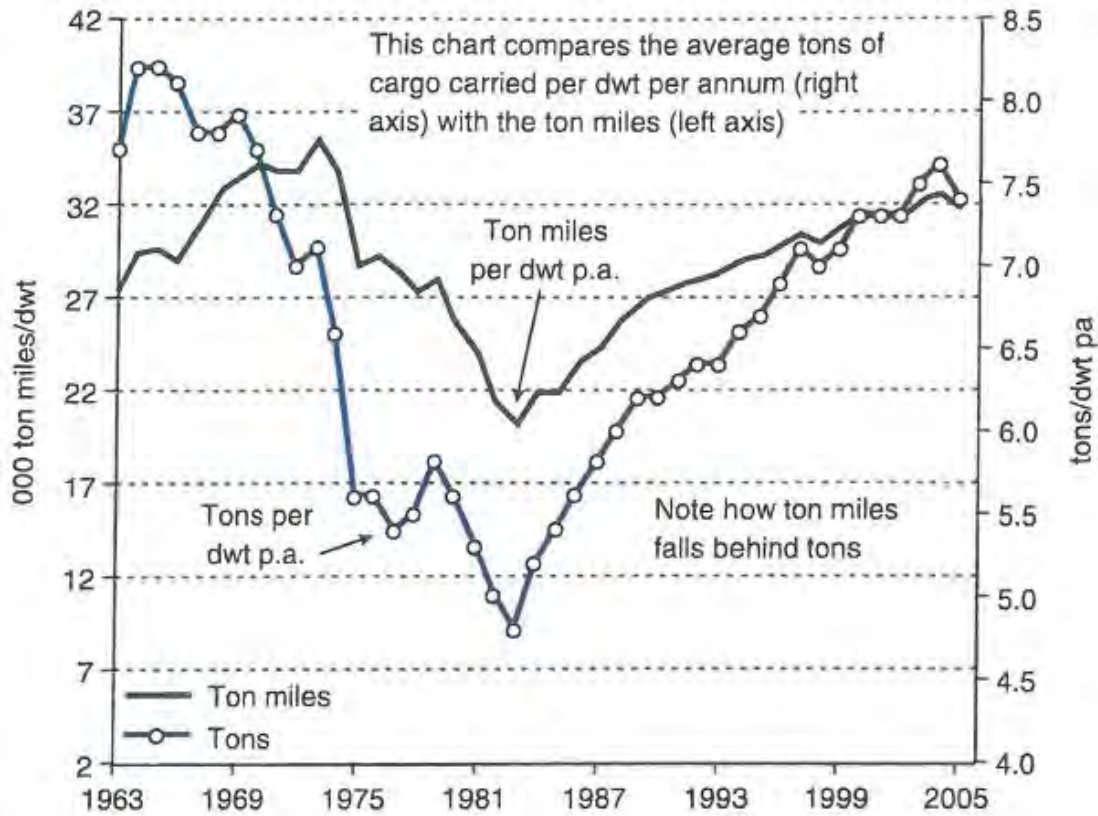


Figure 37: Historical fleet productivity (Stopford, 2009).

The historical productivity of the different ship types varies greatly.

Figure 38, Figure 39, and Figure 40 give the historical productivity of oil tankers, bulkers, container ships, and liquefied gas tankers.

Two data sources have been used to determine these productivities:

1. Tonne-miles data for 1970 – 2008 provided by Fearnleys.
2. Tonne-miles data for 1999 – 2013 as published in the Review of Maritime Study 2013 by UNCTAD.
3. Tonnage data (dwt) for 1979-2013 as provided to us by UNCTAD.

For oil tankers and bulkers the historical productivity is determined for the period 1970-2013, where tonne-miles data from the two different sources had to be combined. As can be seen in Figure 38 and Figure 39, the productivities of the overlapping years match well.

For container ships and liquefied ships the historical productivity is determined for the period 1999-2013.

### Oil tankers

The average productivity of oil tankers has varied highly in the last four decades (see Figure 38) with a maximum of 90,000 tonne-miles per dwt in the early seventies and a much lower peak at the beginning of the 20th century (34,000 tonne-miles per dwt), and a minimum in the early eighties (18,000 tonne-miles per dwt); the fluctuation has thereby been stronger than for the world fleet as a whole.

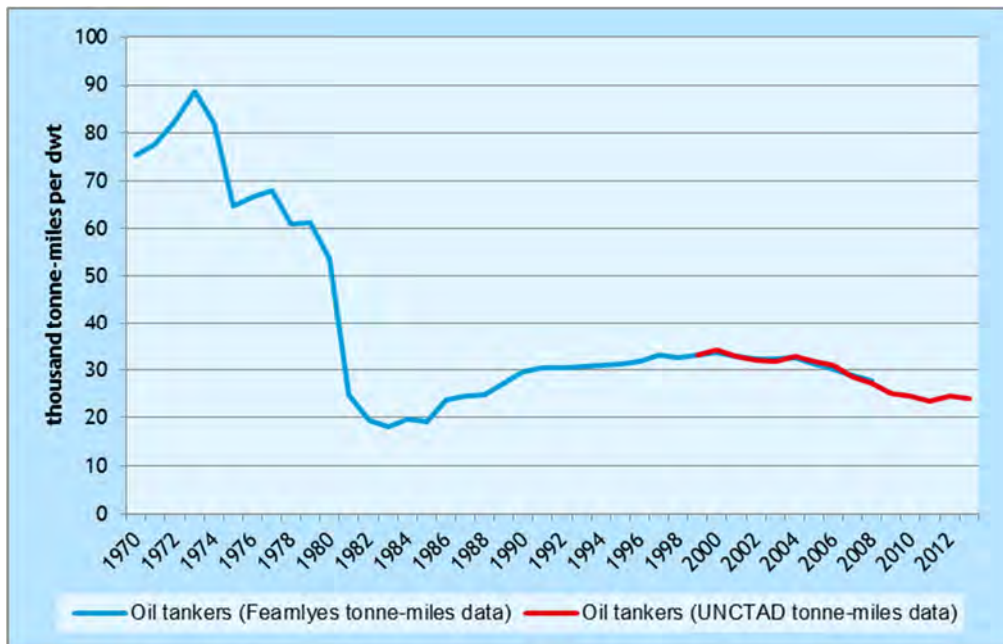


Figure 38: Productivity of oil tankers measured in thousand tonne-miles per dwt, 1970-2013.

In 2012, we found the productivity of oil tankers to amount to 24,000 tonne-miles per dwt.

### Dry Bulkers

For dry bulkers, tonne-miles data are only available for the five main dry bulks (iron ore, coal, grain, bauxite and alumina, and phosphate rock), whereas the tonnage data is related to the total bulker fleet. The productivity presented in Figure 39 is thus an underestimation of the productivity of dry bulkers. This however is not a problem for our tonnage projection: if you assume that the future tonne-miles related to the other bulks develop according to the tonne-miles of the five main dry bulks, the tonnage projection based on the underestimated productivity will still give the good tonnage projection for the dry bulk fleet.

The 2012 productivity value amounts to 23,000 tonne-miles per dwt.

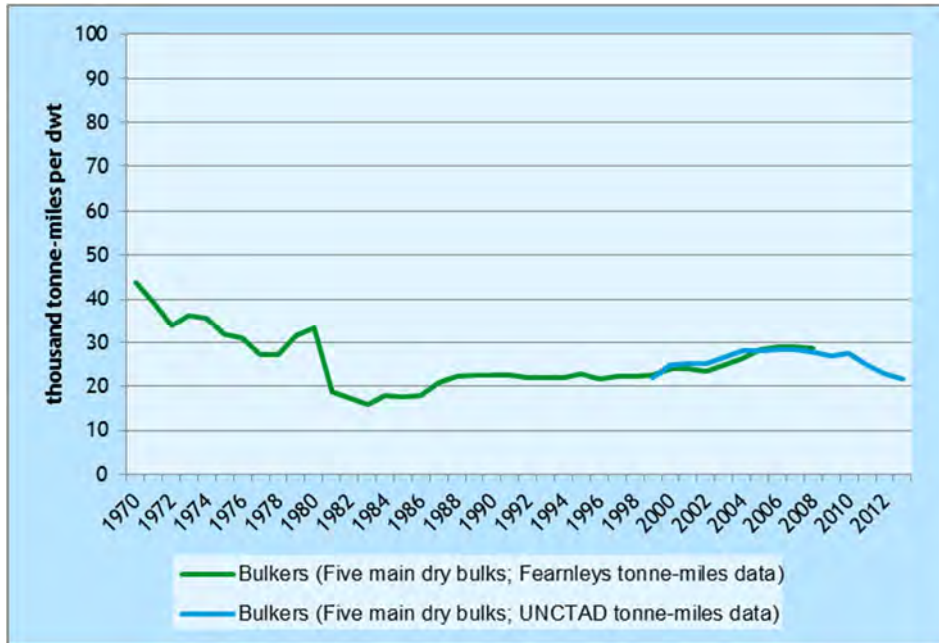


Figure 39: Productivity of dry bulkers measured in thousand tonne-miles (five main dry bulks) per dwt (all bulkers), 1970-2013.

### Container ships<sup>2</sup>

In the period 1999-2013, the productivity of the container ships (see Figure 40) reached a maximum in 2005 with 53,000 tonne-miles per dwt – the supply side could probably only satisfy the high demand by sailing at high speeds and at high cargo load factors. The order placed for container ships in these years and the following economic downturn can explain the decrease of the productivity until 2009. The 2012 productivity amounts to 39,000 tonne-miles per dwt and is higher than the 2009 productivity of 37,000 tonne-miles per dwt.

### Liquefied gas ships

In period 1999-2013, the productivity of the liquefied gas tankers (see Figure 40) has fluctuated between 22,000 and 30,000 tonne-miles per dwt and has thus been less volatile than the productivity of the other ship types. In 2012 the productivity amounted to 24,000 tonne-miles per dwt.

<sup>2</sup> The productivity of the container ships is determined on the basis of tonne-miles data as published by UNCATD in the Review of Maritime Transport. If the tonne-miles data has been determined by applying a default container weight factor to TEU-miles data, which is our understanding of the UNCTAD data, then it can be concluded that the development of the container ship tonne-miles as used in the emissions projection model is the same as the development in terms of TEU-miles.



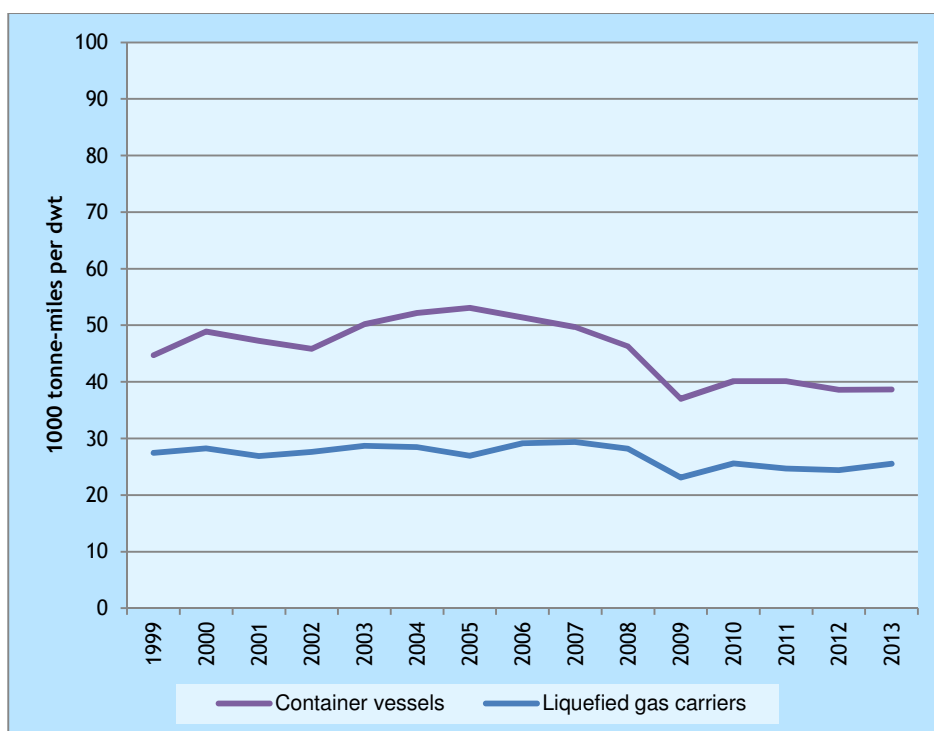


Figure 40: Productivity of container and liquefied gas ships measured in thousand tonne-miles per dwt, 1999-2013.

#### Ship Productivity Projection

For all ship types, the 2012 productivity of the ship types is lower than the long term historical average. We assume that this is caused by the business cycle, rather than by structural changes in the shipping market in the last year. Productivity cycles have appeared before. In liquid and dry bulk, they appear to have a length of 25 – 30 years. In container shipping, we do not have data for a sufficiently long period to determine the length of the cycle.

Based on this analysis, we assume a future productivity development that converges towards the ship type's average productivity. We thereby assume that the productivity reverts back to the 25 years<sup>3</sup> mean value within 10 years, i.e. until 2022.

The ship productivity indices used in the emissions projection model, which can be specified per 5 year period, are given in Table 34.

Table 34: Ship type productivity indices used in emissions projection model.

|                        | 2012 | 2017 | 2022-2050 |
|------------------------|------|------|-----------|
| Liquid bulk ships      | 100  | 113  | 125       |
| Dry bulk ships         | 100  | 102  | 104       |
| Container ships        | 100  | 109  | 118       |
| Liquefied gas carriers | 100  | 106  | 113       |

The productivity of the liquid bulk ships is thereby taken to be the same as for oil tankers and the productivity of the dry bulk ships to be the same as for the bulkers carrying the five main dry bulk goods.

<sup>3</sup> For container ships and liquefied gas ships we take, due to a lack of historical data, the average of the 1999-2012 period, i.e. of a 13 year period.

For general cargo ships the data did not allow to determine a plausible historical productivity, we therefore assume that the productivity of the general cargo ships evolves according to the productivity of container ships in the model.

Regarding passenger ships, the productivity is kept constant.

#### Remarks/Caveats

If, given the projected productivity, the expected transport demand could be met by a smaller fleet, the active fleet is not assumed to be reduced in the model, but the cargo load factor of the ships is assumed to decrease, i.e. ships become less productive. If ships are scrapped/laid up or further slow down instead, projected emissions constitute an overestimation.

The historical ship productivity that serves as a basis for the projection of the future productivity development of the ships is based on data that has a different scope: the tonnage data provided to us by UNCTAD is in terms of total tonnage, i.e. does not differentiate between international and domestic shipping, whereas the tonne-miles data is related to international shipping only. Using this productivity metric to project the development of ships used for international shipping, we thus implicitly assume that the share of the tonnage used for international shipping and domestic shipping does not change in the future.

#### Ship size projections

In the emissions projection model, the ship types are divided into the same ship size classes as in the emissions inventory model. For the emissions projection, the future number of ships per size category has to be determined.

The distribution of the ships over their size categories can be expected to change over time according to the number of the ships that are scrapped and that enter the fleet as well as their respective size.

The age of a ship and its cost efficiency determine when a ship is being scrapped. In the emissions projection model a uniform life time of 25 years for all ships is assumed.

The size of the ships that enter the market is determined by several factors:

- the overall demand for the type of cargo transported by the ship type,
- the trade patterns regarding these cargoes which depend on the geographic location of the supplying and demanding countries/regions,
- the cargo load factors on the specific trades that, depending on the potential size of the ship, can be expected; these load factors are not only determined by the total scope of the trade but also by the frequency of the deliveries expected by the demanding party,
- the physical restrictions a ship faces in terms of the dimensions of canals, waterways and the extra costs of a detour (that could be lower than the cost saving when employing a larger ship),
- the physical restrictions a ship may face in terms of the dimensions (e.g. depth) of the ports and the equipment of the terminals,
- the productivity of the ports/terminals that has an impact on the time a ship is non-active.

In the emissions projection model it is assumed that per size category the average size of the ships will not, whereas the number of ships per size bin will change compared to 2012. The total capacity per ship type is thereby, given a certain

productivity level (in tonne-miles per dwt), assumed to be able to meet the projected transport demand.

Depending on the data availability, two alternative approaches to derive the future number of ships per size category have been applied (see **Error! Reference source not found.** and Figure 41 for an illustration):

1. The total expected tonnage capacity of a ship type is first distributed over the ship size categories and then, by means of the expected average ship size per category, the number of ships per category is derived or
2. the total number of expected ships of a ship type is derived first, namely by applying the expected average ship size of all ships of this type to the total expected tonnage capacity of that ship type and subsequently, the expected distribution of ships over the size categories in terms of numbers is applied.

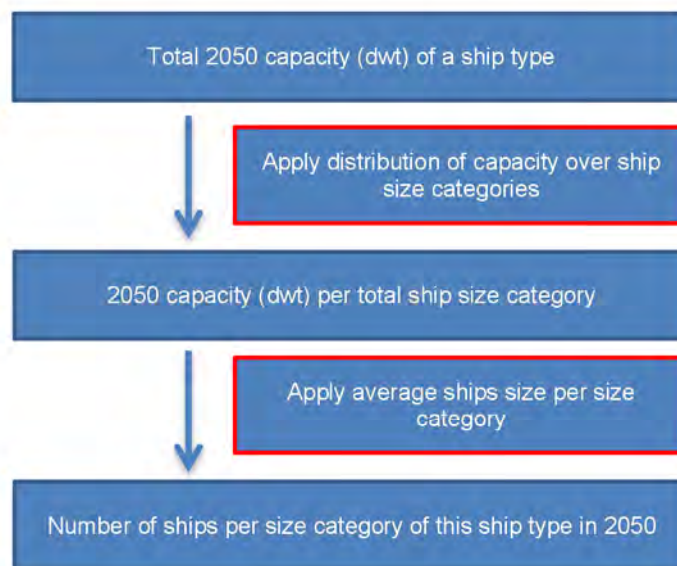


Figure 40: First methodology to determine the number of ships per size category in 2050.

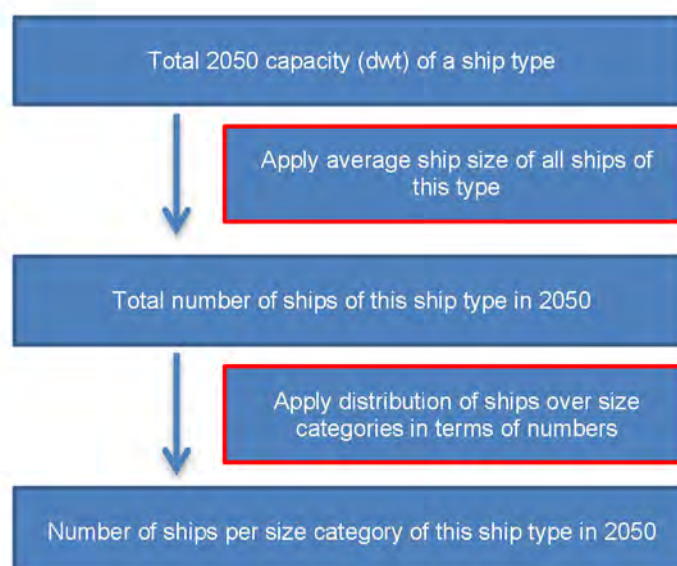


Figure 41: Second methodology to determine the number of ships per size category in 2050.

From the emissions inventory we know for each ship type for 2012

1. the average size of the ship per size category,
2. the distribution of the ships over the size categories in terms of capacity, and
3. the distribution of the ships over the size categories in terms of numbers.

Based on a literature review we then argue how we expect the distribution of the ships over the size categories (in terms of capacity or in terms of numbers) to develop until 2050. Historical developments of the distribution, expected structural changes in the markets, and infrastructural constraints are thereby taken into account. The average size of a ship per ship type, which is necessary for the first methodology, then follows.

We are aware that the projection of the ship distribution until 2050 is associated with a high level of uncertainty. Future structural changes and their impacts are difficult to assess and some markets, like for example the LNG market, are rapidly evolving and highly uncertain future markets, making it difficult to draw conclusions from developments in the past. And even if a clear historical trend can be established, the question remains whether the trend will last or come to a halt.

In the following, the derivation of the 2050 ship size distribution for the main ship types is presented. In Table 35 you find an overview on the methodology that has been applied per ship type. The choice for the first or the second methodology (as illustrated in **Error! Reference source not found.** and Figure 41) is thereby solely based on data availability.

**Table 35: Methodology applied for projection of ship size distribution of different ship types differentiated in the study.**

| Ship type            | Methodology  |
|----------------------|--|
| Container            | Second methodology.  |
| Bulk carrier         | First methodology.   |
| Oil tanker           | First methodology.   |
| Liquefied gas tanker | Second methodology.  |
| Chemical tanker      | Same development is applied as derived for oil tankers.  |
| All other ship types | Distribution of the ships over the size categories in terms of the share of the capacity is assumed not to change. |

### Container ships

For container ships, we derive the number of ships per size category, applying the second methodology (see Figure 41).

Starting point of the analysis is the 2012 distribution of the container ships over the size categories as determined in the emissions inventory (see Table 36).


**Table 36: 2012 distribution of container ships over the size categories in terms of numbers.**

| Size category     | Distribution of ships in terms of numbers |
|-------------------|---|
| 0-999             | 22 %                                      |
| 1,000-1,999 TEU   | 25 %                                      |
| 2,000-2,999 TEU   | 14 %                                      |
| 3,000-4,999 TEU   | 19 %                                      |
| 5,000-7,999 TEU   | 11 %                                      |
| 8,000-11,999 TEU  | 7 %                                       |
| 12,000-14,500 TEU | 2 %                                       |

14,500 TEU +

0.2 %

In Figure 42 the development of the distribution of the ships of the cellular fleet over the size categories is given for the period 2002 – 2014.

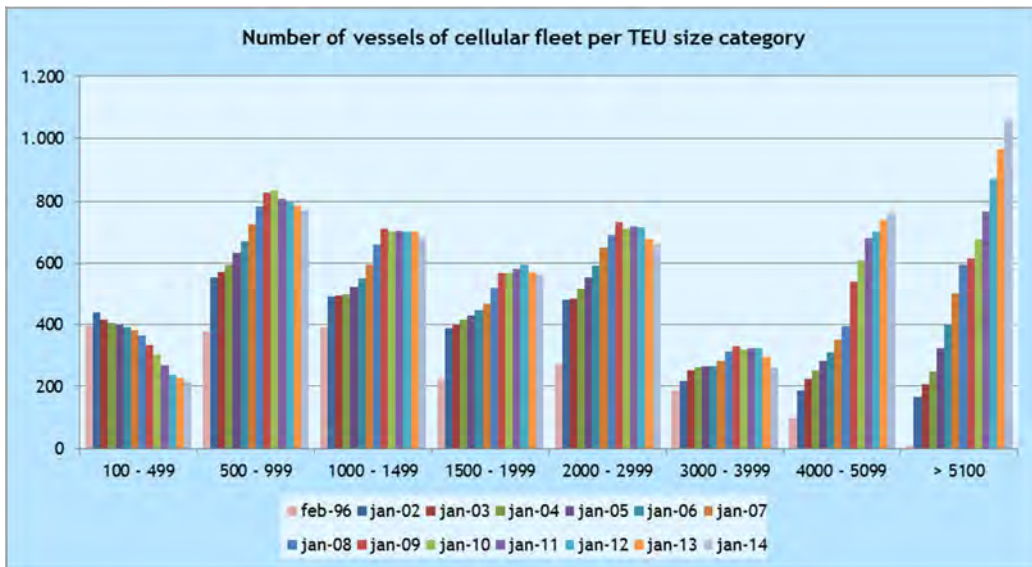

Source: Based on Alphaliner data that has been collected from various sources.

Figure 42: Composition of global container fleet in the period 2002 – 2014 (beginning of year figures).

Over this period the number of ships in the 500 – 1,000 TEU and in the 4000 – 5,100 range has been relatively high, whereas the number of ships in the 3000 – 4000 TEU range relatively low.

Figure 42 also illustrates that over the last decade, the number of the smallest ships in the 100 – 500 TEU range has steadily decreased, whereas the number of the ships above 4000 TEU has steadily increased. For all the other, i.e. the medium-sized ships, it holds that their number increased until the crises whereas it decreased thereafter.

Due to economies of scale, a trend towards using larger ships has taken place. Ships of 10,000 TEU and above have substituted smaller ships, mainly in the range 2,800 – 5000 TEU and ships of 1,000-2,000 TEU have been mostly been displaced by 2,000 – 2,700 TEU ships (BRS, 2013). There is a broad agreement amongst observers of the container fleet that “mid-size” ships (those in the 4000-5000 TEU range) are becoming almost obsolete as they are being replaced by more efficient larger ships.

In contrast, ships that are being used as regional network carriers or as feeders, i.e. ships of 2,800 TEU or less have naturally not been replaced by 10,000 + ships.

About 93 % of the 10,000+ TEU ships currently in operation are deployed in the East Asia-Europe trade lanes because they have the requisite volume scale, voyage length, channel depths, and configuration of ports to support the use of such ships (U.S. DOT, 2013).

Nearly 55 % of the existing 7,500-9,999 TEU ships in operation are also assigned to the East Asia-Europe trade, while another 22 % are serving the East Asia-U.S. West Coast markets; the remaining 23 % are deployed mainly in the Far East-West Coast

of South America trade and the Far East-Suez Canal-U.S. East Coast corridor. (U.S. DOT, 2013)

Regarding the development of the size of the container ships until 2050 we expect two main factors to have an impact: a further trend towards larger ships due to economies of scale as well as infrastructural changes.

As mentioned above, a trend towards building and utilizing larger ships has taken place in the container ship market. Due to current infrastructural barriers which can be expected to be removed until 2050 some trades can be expected to experience a catch-up effect in this regard:

- The Suez Canal can be used by container ships of up to 18,000 TEU which is the size of the currently largest ships. This is not the case for the Panama Canal: before expansion, a container ship of up to 5000 TEU, and after expansion of probably up to 13,000 TEU will be able to pass the Panama Canal. This can be expected to lead to more large ships being used in the East Asia – U.S. East Coast trade.
- The East Asia – U.S. West Coast trade, is, next to the East Asia – Europe trade, the only trade that is currently ready for the 18,000 TEU size in terms of cargo volumes (ContPort Consult, 2013). So far, ship owners have been hesitant to utilise very large container ships due to the demand for a high sailing frequency and the low terminal productivity at US ports (ContPort Consult, 2013). Terminal productivity however can be expected to increase until 2050 and more very large container ships can be expected to be utilised for this trade as well.

Whether for the other trades even larger ships will be utilized until 2050 is of course debatable. Utilization rates may not be sufficient enough in the future or intensive growth, i.e. higher capacity utilization, could for example lead to a slowing down of the ship size growth. For our projection we therefore assume that the number of larger ships does increase but that this increase is not very pronounced.

In Table 37, an overview of the development of the distribution of the ships over the size categories that we expect and the respective estimation of the 2050 distribution is given.


**Table 37: Development of the distribution of container ships over size categories (in terms of numbers).**

| <b>Size category (TEU)</b> | <b>2012 distribution</b> | <b>Development until 2050</b>  | <b>2050 distribution</b> |
|----------------------------|--------------------------|--|--------------------------|
| 0-999                      | 22%                      | Very low share of 0-499 does not change; high share of 500-999 unchanged.  | 22%                      |
| 1,000-1,999                | 25%                      | Trend that 1,000-1,999 TEU are replaced by 2,000-2,999 TEU ships continues.  | 20%                      |
| 2,000-2,999                | 14%                      |  | 18%                      |
| 3,000-4,999                | 19%                      | Replaced by very large (14,500 +) and by larger ships that can transit Panama Canal after expansion (probably 8,000-11,999 TEU and parts of 12,000-14,500 TEU)             | 5%                       |
| 5,000-7,999                | 11%                      | Share as in 2012.  | 11%                      |
| 8,000-11,999               | 7%                       | Share increases due to expansion of Panama Canal.  | 10%                      |
| 12,000-14,500              | 2%                       | Share increases due to the ongoing trend of using larger ships, replacing 3,000-4,999 TEU ships and due to the expansion of Panama Canal, replacing 3,000-4,999 TEU ships. | 9%                       |
| 14,500 +                   | 0.2 %                    | Share increases due to the ongoing trend of using larger ships, replacing 3,000-4,999 TEU ships.   | 5%                       |

If the average ship size per size bin does not change compared to 2012, the average size of a container ship will be approximately 4,600 TEU or 55,000 dwt in 2050.

In Figure 44 the development of the average ship size of the cellular fleet is given for the period 1988–2014, showing a steady increase of the average size.

An average size of 4,600 TEU in 2050 means that this trend will slow down in the period until 2050.

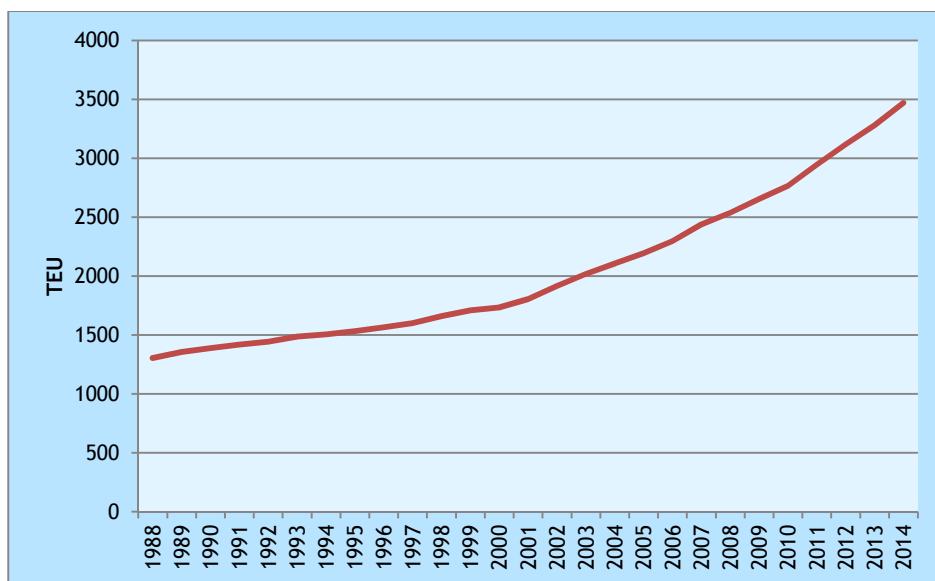

Source: BRS (2009) and Alphaliner (various years)

Figure 43: Historical development of average ship size of cellular fleet.

### Oil tankers

For the oil tankers, we derive the number of ships per size category, applying the first methodology (see **Error! Reference source not found.**), i.e. we derive the distribution of the capacity over the ship size categories as well as the expected average size of the ships per size category.

Tankers are usually divided in several size categories:

- Small
- Handysize
- Handymax
- Panamax
- Aframax
- Suezmax
- Very Large Crude Oil Carrier (VLCC)
- Ultra large crude oil carrier (ULCC)

The sizes of these ships differ somewhat. For the purpose of our inventory model and ship projection model, the following bins have been defined:

Table 38: Size bins for tankers.


| Capacity range (dwt) | Size category |
|----------------------|---------------|
| 0-4,999              | Small         |
| 5,000-9,999          | Small         |
| 10,000-19,999        | Handysize     |
| 20,000-59,999        | Handymax      |
| 60,000-79,999        | Panamax       |
| 80,000-119,999       | Aframax       |
| 120,000-199,999      | Suezmax       |
| 200,000 +            | VLCC, ULCC    |

ULCCs (>320,000 dwt) have been built in the 1970s and again in the 2000s, but they have never conquered a significant market share. They are currently predominantly



used as floating storage units. We do not expect a breakthrough of larger tankers in the coming decades and will therefore not be included in our analysis.


In the 1990s, the average size of tankers has decreased as the total fleet capacity has remained constant while the total number of ships grew, as shown in Figure 44. In the 2000s, the average size has remained more or less stable and in the last few years, the capacity of the fleet has increased at a higher rate than the number of ships, indicating an increase in the average size.

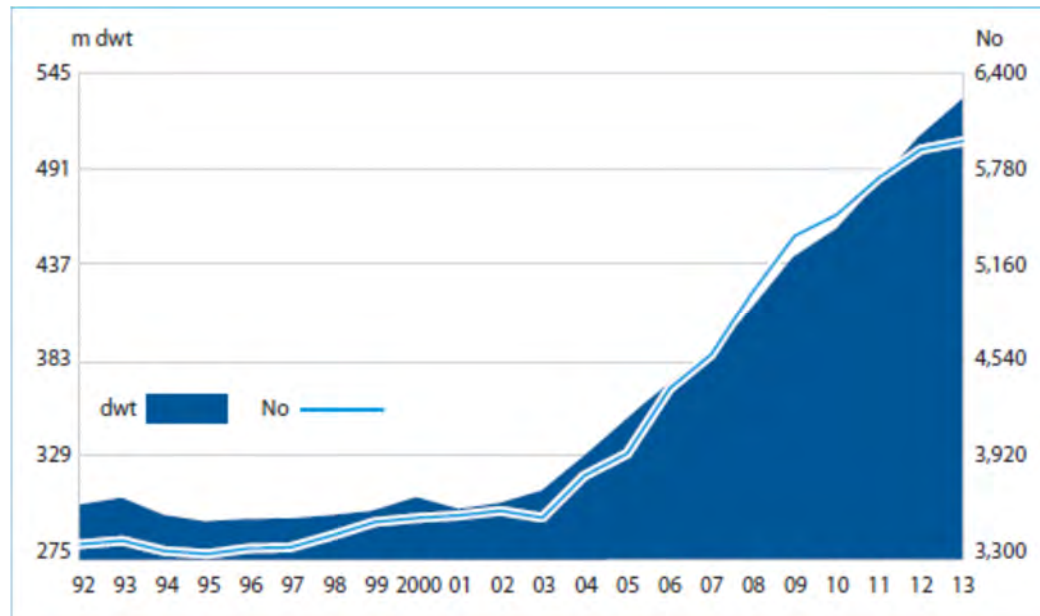

Source: Intertanko (2012).

**Figure 44: Projected tanker fleet development 1992-2013 (projection for 2012 and 2013).**

According to RS Platou (see Figure 44), there has been a shift from VLCCs towards the other tanker sizes, mainly to the tankers in the 70-120,000 dwt range (this is confirmed by Intertanko's annual report 2012/2013), which however seems to have come to a halt in 2012 and 2013. On the one hand, larger refineries (e.g. in Asia) could drive up the ship sizes again, but a shift of production away from OPEC to countries that are not able to accommodate larger than Aframax ships might also drive the size down again.

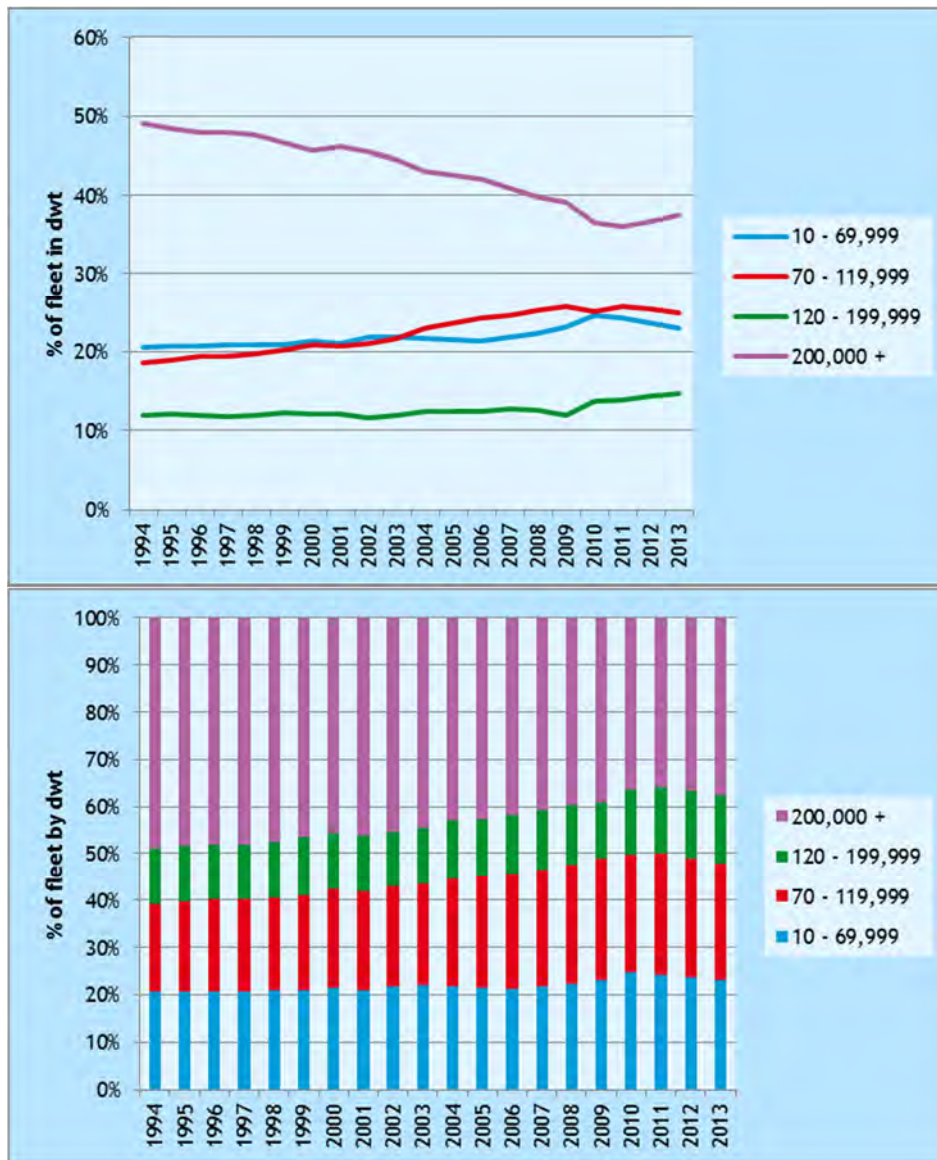

Source: RS Platou (2014).

Figure 45: Capacity distribution of tankers over size categories.

From the available evidence we conclude that:

- The shift from VLCCs towards the other smaller tanker sizes seems to have come to a halt. It is uncertain whether the shift will play a role in the future again, which is why we assume that the shares of classes will remain stable in the coming decades.
- VLCCs are likely to remain the largest tanker class.

**Table 39: Development of the distribution of oil tankers over size categories (in terms capacity).**

| Size categories used in update study (dwt) | Distribution in 2012 | Development until 2050 | Distribution in 2050 |
|--|----------------------|------------------------|----------------------|
| 0-4,999                                    | 1%                   | None                   | 1%                   |
| 5,000-9,999                                | 1%                   | None                   | 1%                   |
| 10,000-19,999                              | 1%                   | None                   | 1%                   |
| 20,000-59,999                              | 7%                   | None                   | 7%                   |
| 60,000-79,999                              | 7%                   | None                   | 7%                   |
| 80,000-119,999                             | 23%                  | None                   | 23%                  |
| 120,000-199,999                            | 17%                  | None                   | 17%                  |
| 200,000+                                   | 43%                  | None                   | 43%                  |

### Dry bulk carriers

There is relatively little data available for the dry bulker fleet and the available data only allows to apply the first methodology (see **Error! Reference source not found.**).

Bulk carriers are traditionally divided into five size categories:

- Small
- Handysize
- Handymax
- Panamax
- Capesize


For the purpose of our inventory model and ship projection model, the following bins have been defined:

**Table 40: Size bins for dry bulk carriers.**

| Capacity range  | Size category |
|-----------------|---------------|
| 0-9,999         | Small         |
| 10,000-34,999   | Handysize     |
| 35,000-59,999   | Handymax      |
| 60,000-99,999   | Panamax       |
| 100,000-199,999 | Capesize      |
| 200,000-+       |               |

Note that since the Capesize category has actually not an upper capacity limit, the last two capacity ranges are both Capesize ships; Very Large Ore Carriers (VLOCs) and Ultra Large Ore Carriers (ULOCs) fall into the last (200,000+) category.

RS Platou (2014) provides the distribution of the capacity (dwt) of the bulker fleet over three size ranges for the period 1994 – 2013 (see Figure 46).

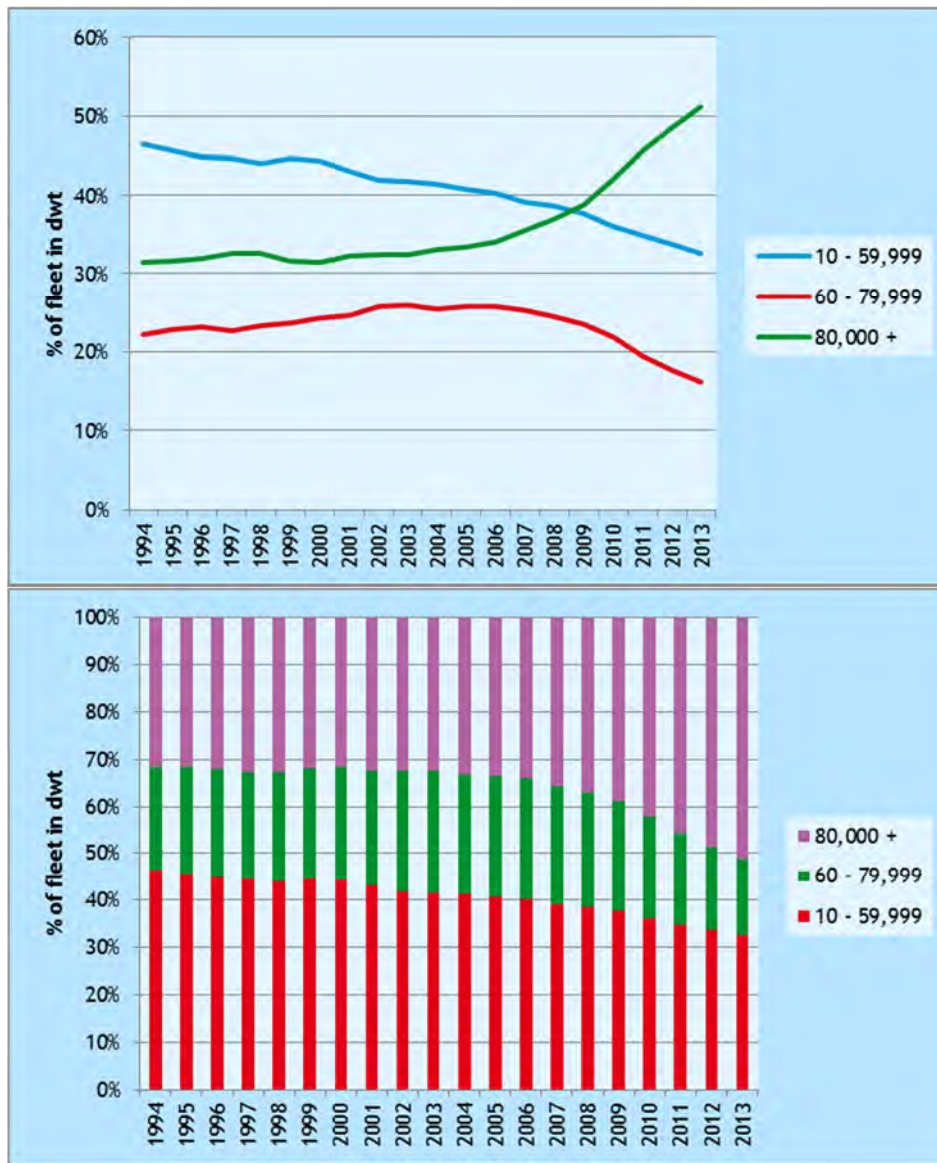

Source: RS Platou (2014)

Figure 46: Distribution of bulker fleet in terms of dwt for the period 1994-2013.

The capacity share of the ships in the range 10,000 – 59,000 dwt has decreased steadily in the period 1994-2013, from around 45% in 1994 to around 33% in 2013.

The capacity share of the ships in the range 60,000 – 79,999 dwt has increased from 30% in 1994 to 26% in 2006 and has dropped afterwards to almost 15%.

The capacity share of bulkers of 80,000 dwt and above has increased steadily in the period 1994-2013, from around 30% to around 50% with the main growth having taken place from 2006 on.

The capacity share of ULOCs and VLOCs is not separately specified in this graph, but is part of the 80,000 + dwt range.

Regarding the development of the shares until 2050, we expect the expansion of the Panama Canal to have a major impact.

According to the Review of Maritime Transport (UNCTAD, 2013), the expansion aimed initially to attract shipments from Asia to the East Coast of the United States,

but other goods and regions are emerging as potentially important users of the new canal. By allowing larger tonnage to pass, a number of markets, commodities and goods can be expected to benefit. Examples include the following:

- (a) grain moving from the United States East Coast/Gulf ports to Asia;
- (b) soybean moving from developing America to Asia;
- (c) coal and iron-ore shipments from Colombia, the Bolivarian Republic of Venezuela and Brazil with destinations in Asia;
- (d) coal shipments from the East Coast of the United States to Asia, in particular China;
- (e) oil flowing from Ecuador to the East Coast of the United States;
- (f) gas cargo originating from Trinidad and destined for consumption in Chile; (g) gas exports from the United States to Asia.

After the expansion of the Panama Canal, Panamax and parts of the Capesize fleet will be able to transit, whereas some of the Capesize ships as well as all the ULOCs and VLOCs won't.

This is why we expect that the share of the carriers in the 100,000-199,999 dwt range will increase and that this growth will come at the expense of the ships in the 10,000 – 99,000 range, with the fleet growth being captured by the larger ships and, in the long run, with the larger ships substituting the smaller ones.

Bulk carriers of 200,000 dwt and above are predominantly iron ore carriers. Neither ULOCs nor VLOCs can neither transit the Panama Canal (U.S. DOT 2013) nor the Suez Canal. Hence, for these ships, the expansion of the Panama Canal cannot be expected to have a positive impact.

Australia and Brazil are major iron ore exporters, followed by South Africa, India, Canada, and Sweden. China is the major importer of iron ore, followed by Japan, the European Union, the Republic of Korea (UNCTAD, 2013). A potential negative effect of the expansion of the Panama Canal on the very large carriers can thus not be expected to be large.

It is difficult to estimate whether the share of the VLOCs will further rise due to economies of scale. End of 2012, eighteen Valemax (dry bulk ships above 400,000 dwt) have been in operation and after 2012, ten additional Valemax have been added to the fleet, with three more being on order at the beginning of 2014. However, these ships are used for a very specific trade and some of the economies of scale have not fully materialized due to political reasons. Our expectation therefore is that the share of the 200,000 dwt ships will not increase due to further economies of scale.

**Table 41: Development of the distribution of dry bulk ships (incl. combined carriers) over size categories in terms of capacity.**

| Size categories bulkers used in update study (dwt) | 2012 distribution | Development until 2050   | 2050 distribution |
|--|-------------------|--|-------------------|
| 0-9,999  | 1%                | None   | 1%                |
| 10,000-34,999                                      | 9%                | Trend of declining share will continue.  | 6%                |
| 35,000-59,999                                      | 22%               |  | 20%               |
| 60,000-99,999                                      | 26%               |  | 23%               |
| 100,000-199,999                                    | 31%               | As the Panama Canal is expanded, we expect this size category to increase at the expense of the ships 10,000 – 99,999 dwt. | 40%               |
| 200,000-+  | 11%               | Expansion of Panama Canal could have slight negative effect; no significant further economies of scale expected.           | 10%               |

#### Liquefied gas carriers

##### LNG carriers

Due to data availability, we apply the second methodology to project the number of LNG ships in the different size categories in 2050 (see Figure 41).

The first LNG cargo was shipped in 1959 (Danish Ship Finance, 2014); the market for LNG carriers is thus relatively young. The LNG fleet grew rapidly in the 1970s, stagnated in the 1980s, then started growing again the 1990s (Stopford, 2009) and grew rapidly in the last years; at the end of 2012, total capacity of the fleet was more than one and a half times the size of the fleet at the end of 2006. (IGU, 2013)

In Table 42, the distribution of the LNG fleet in terms of numbers of ships over five size categories is given for 2012.

**Table 42: Distribution of global LNG fleet over size categories in terms of numbers in 2012.**

| Capacity range (m <sup>3</sup> ) | Share |
|----------------------------------|-------|
| 18,000 – 124,999                 | 7%    |
| 125,000 – 149,999                | 62%   |
| 150,000 – 177,000                | 19%   |
| 178,000 – 210,000                | 0%    |
| > 210,000                        | 12%   |

Source: IGU (2013)

There is only a very small number of carriers of 18,000 m<sup>3</sup> and below. These are typically used in domestic and coastal trades. The smallest cross-border LNG ships, typically 18,000 m<sup>3</sup> to 40,000 m<sup>3</sup>, are mostly used to transport LNG from Southeast

Asia to smaller terminals in Japan. The most common class of LNG carrier has a capacity between 125,000-149,000 m<sup>3</sup>, representing 62% of the global LNG fleet in 2012. The existing carriers with a capacity of 150,000 m<sup>3</sup> to 177,000 m<sup>3</sup> constituted 19% of 2012 LNG fleet. Most of the carriers ordered fall into this category. (IGU, 2013)

The category with the largest LNG ships consists of Q-flex and Q-Max ships, with a Q-Max ship having a capacity of 263,000 m<sup>3</sup> to 266,000 m<sup>3</sup>. Thirteen Q-Max ships have been build so far. (Qatargas, 2014)

Depending on whether the LNG export projects submitted to the U.S. Department of Energy are approved (currently 4 out of the 20 have been approved), the U.S. could turn form a net importer to a net exporter of LNG (Deloitte, 2013)

The expansion of the Panama Canal could thereby play a crucial role in the LNG market, since, at present, only 10% of the LNG fleet can pass through the canal. (Lloyd’s List, 2012). After the expansion about 80% of the LNG ships can transit and the only LNG carriers that have been identified as unable to transit the new locks due to their size are the 31 Q-flex ships of 216,000 m<sup>3</sup> and the 14 Q-max ships of 266,000 m<sup>3</sup>. (BIMCO, 2013)


The impact on the size of the LNG carriers is however not straightforward: on the one hand very large LNG carriers (> 200,000 m<sup>3</sup>) could play an increasing role in the LNG trade between the U.S. East Coast and Europe and the US West Coast and Asia, but on the other hand these large ships would call for pipelines to meet the demand needs in the different regions of the importing country/continent as well as for pipelines within the U.S. to avoid the Panamax Canal transit. In our projection we therefore assume that the share of the 50,000 – 199,999 m<sup>3</sup> ships will increase at the expense of the very large carriers.

**Table 43: Development of distribution of global LNG fleet over size categories in terms of numbers.**

| Size categories (m <sup>3</sup> ) differentiated in study | Distribution in 2012 | Development until 2050                  | Distribution in 2050 |
|---|----------------------|---|----------------------|
| 0 – 49,000  | 7%                   | No change                               | 7%%                  |
| 50,000 – 199,999  | 81%                  | Shift due to expansion of Panama Canal. | 90%                  |
| > 200,000   | 12%                  |   | 3%                   |

The size of LNG carriers can vary significantly between the different ship types, on average however a historical trend towards larger capacities can be observed (see Figure 47): The average size of LNG carriers has rapidly increased in the 1970s from about 80,000 m<sup>3</sup> to about 110,000 m<sup>3</sup>, then only slowly increased to 130,000 m<sup>3</sup> in 2006. After 2006, the average size increased rather rapidly again, partly due to the commissioning of larger Q-Series ships. In 2012, the average capacity of an LNG carrier was approximately 148,000 m<sup>3</sup>.

From the expected 2050 distribution of the LNG fleet as given in Table 43 and the assumption that the average ship size per size bin does not change compared to 2012, it can be concluded that in 2050 the average size of a LNG ship is expected to have a capacity of approximately 132,000 m<sup>3</sup>. That means that the historical trend towards larger capacities would not continue.

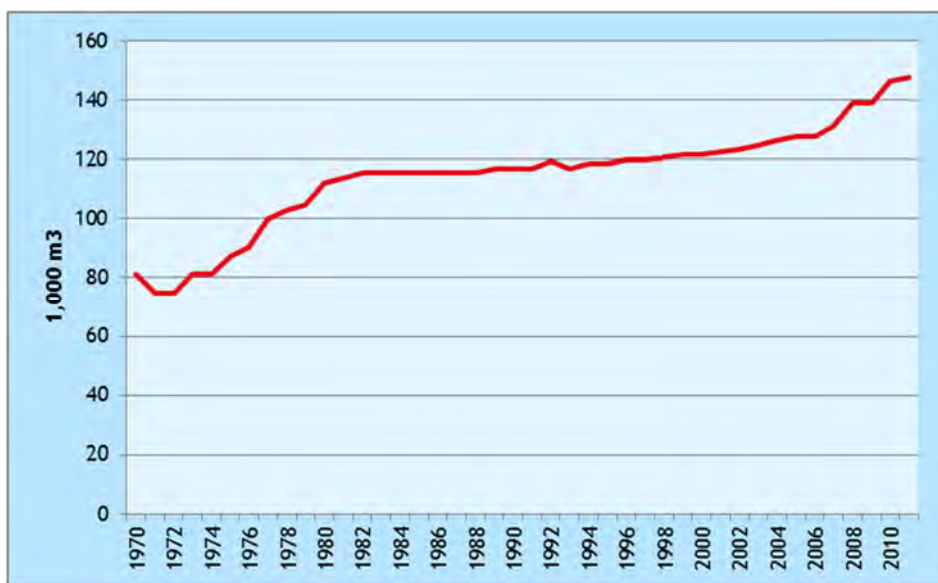

Source: Based on gas in focus (2014).

Figure 47: Development of average capacity of LNG carriers in period 1970-2011 and according linear trend.

### LPG carriers

Due to the data availability, we apply the second methodology to project the number of LPG ships in the different size categories in 2050 (see Figure 41).

There are very different LPG carrier types in the market, depending on the cargo type carried, calling for different security standards, and depending on whether the respective gas is kept liquid by pressure or by cooling.

In Table 44 the distribution of the LPG fleet over nine size categories in terms of number of ships is given for end of 2011.

Table 44: Distribution of LPG fleet end of 2011 (9 size categories).

| Capacity range (m <sup>3</sup> ) | Share |
|----------------------------------|-------|
| Up to 999                        | 5%    |
| 1,000 – 1,999                    | 23%   |
| 2,000 – 4,999                    | 27%   |
| 5,000 – 9,999                    | 18%   |
| 10,000 - 19,999                  | 5%    |
| 20,000 – 39,999                  | 10%   |
| 40,000 – 59,999                  | 2%    |
| 60,000 – 99,999                  | 12%   |
| 100,000 and above                | 0%    |

Source: OPEC (2012).

About 70% of these ships had thus a capacity of less than 10,000 m<sup>3</sup>. Regarding the other ships, about 15% fall respectively in the range 10,000 – 39,999 and 40,000 – 99,999. None of the ships had a capacity above 100,000 m<sup>3</sup>.

Table 45 gives the distribution of the LPG carriers over the three ship size classes differentiated in the emissions inventory and emissions projection.



**Table 45: Distribution of 2012 LPG fleet in terms of numbers (3 size categories).**

| <b>Capacity range (m<sup>3</sup>)</b> | <b>Share</b> |
|---------------------------------------|--------------|
| 0 – 49,000                            | 87%          |
| 50,000 – 199,999                      | 13%          |
| > 200,000                             | 0%           |

About 87% of the LPG carriers fall in the first (0 – 49,000 m<sup>3</sup>), whereas 13% fall in the second size category (50,000 – 199,999 m<sup>3</sup>). Since there are no ships with a capacity of 100,000 m<sup>3</sup> or above, no ships fall in the third category.

According to Platts (2013), the average size of Very Large Gas Carrier (VLGC) new builds has risen to around 84,000 m<sup>3</sup> from 82,000 m<sup>3</sup> in the 2000s. Assuming that this growth trend continues in the future, there will still be no LPG ship with a capacity of 200,000 m<sup>3</sup> in 2050.

Regarding the other two size categories it is plausible to assume that the share of the larger ships (2nd size category) will increase until 2050:

The second size category mainly comprises (VLGCs). While VLGCs ships currently primarily navigate the long routes from the countries in the Middle East region to Asia and from West Africa to the USA and Europe (Danish Ship Finance, 2014), VLGCs could in 2050 play an important role in the trade between the USA and Asia.

Asian buyers are, according to BIMCO (2013), keen to purchase the volumes of LNG and LPG about to be processed for export at plants along the US Gulf Coast and large gas carriers directed through the Canal will enable them to realize the benefits of economies of scale and reduced voyage lengths.

Currently, some of the smaller VLGCs could use the Panama Canal, whereas all VLGCs will be able to transit the new locks. (BIMCO, 2013)

Table 46 summarizes the expected development until 2050.

**Table 46: Development of distribution of global LPG fleet in terms of numbers.**


| <b>Capacity range (m<sup>3</sup>)</b> | <b>Distribution in 2012</b> | <b>Development until 2050</b>          | <b>Distribution in 2050</b> |
|---------------------------------------|-----------------------------|--|-----------------------------|
| 0 – 49,000                            | 87%                         | Share will decline.                    | 75%                         |
| 50,000 – 199,999                      | 13%                         | Share of VLGCs will rise.              | 25%                         |
| > 200,000                             | 0%                          | No LPG carriers will become available. | 0%                          |

The average capacity of an LPG carrier has gradually risen in the period 1999 to 2012: end of 1999 it amounted to about 13,700 m<sup>3</sup> and end of 2011 to about 16,100 m<sup>3</sup> (see Figure 48).

If this trend continued, an LPG carrier would on average have a capacity of 24,500 m<sup>3</sup> in 2050.

From the expected 2050 distribution of the LPG fleet as given in Table 46 and the assumption that the average ship size per size bin does not change compared to

2012, it can be concluded that in 2050 the average size of a LPG ship is expected to have a capacity of approximately 25,100 m<sup>3</sup> which is only slightly higher than expected from the historical trend.

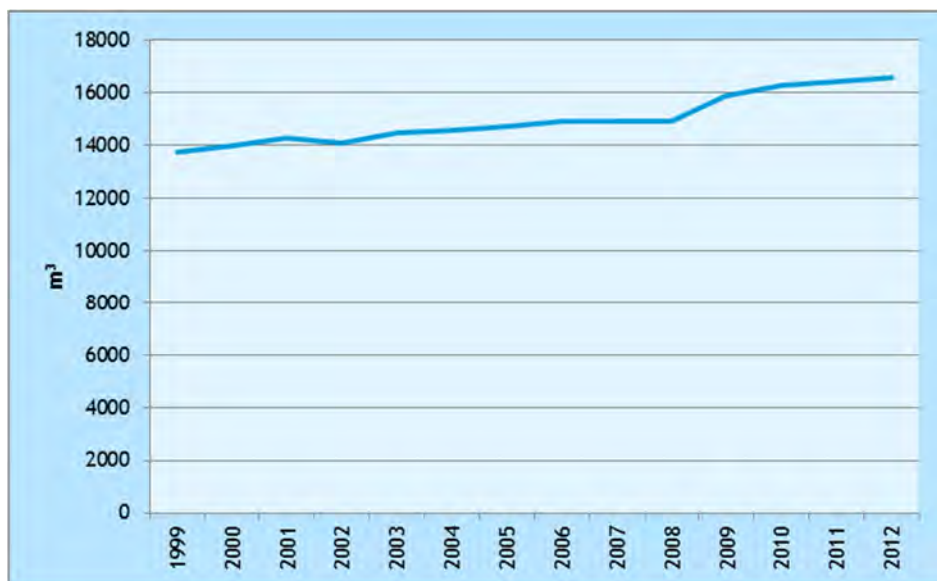

Source: Based on OPEC (Annual Statistical Bulletin for the years 1999-2013).

Figure 48: Development of average size of LPG carriers in the period 1999-2012.

For LNG and LPG ships taken together, we expect the following development of the distribution of the gas carrier fleet in terms of numbers of ships.

Table 47: Development of distribution (in terms of numbers of ships) of the global gas carrier fleet.

| Capacity range (m <sup>3</sup> ) | Distribution in 2012 | Distribution in 2050 |
|----------------------------------|----------------------|----------------------|
| 0 – 49,000                       | 68%                  | 32%                  |
| 50,000 – 199,999                 | 29%                  | 66%                  |
| > 200,000                        | 3%                   | 2%                   |

If the average ship size per size bin does not change compared to 2012, the average size of a liquefied gas carrier will be approximately 85,000 m<sup>3</sup> or 50,000 dwt in 2050.

### Regulatory and autonomous efficiency improvements

The projection of the future emissions of maritime shipping requires to project future developments in fuel efficiency of the fleet. In the period up to 2030, we distinguish between market-driven efficiency changes and changes required by regulation, i.e. EEDI and SEEMP. The market-driven efficiency changes are modelled using a MAC curve, assuming that a certain share of the cost-effective abatement options are implemented. The data for the MACC curve are taken from Imarest (MEPC 62/INF.7). In addition, regulatory requirements may result in the implementation of abatement options irrespective of their cost-effectiveness. Between 2030 and 2050, we see little merit in using MACCs, as the uncertainty about the costs of technology and its abatement potential increases rapidly for untested technologies. In addition, regulatory efficiency improvements for the post-2030 period have been discussed, but not defined. Therefore we have chosen to take a holistic approach towards ship efficiency after 2030.

#### EEDI and SEEMP

Ships built after 1 January 2013 have to comply with EEDI regulation, and from the same date all ships need to have a SEEMP. As a result, the efficiency of new and

existing ships could change. As the EEDI requirements become increasingly stringent over time, the efficiency of ships could also change over time.

This section reviews the impact of the EEDI and the SEEMP on the efficiency of ships in order to incorporate it in the emission projection model.

For the purpose of the emission projection model, efficiency is defined as unit of energy per unit of distance for the relevant ship. A ship is characterised by the ship type and her size. New ships are ships that enter the fleet from 2013.

According to Resolution MEPC.203(62), and MEPC 66 WP 10 Add.1 new ships built after 1 January 2013 have to have an attained EEDI that is at or below the required EEDI for that ship. The required EEDI is calculated as a percentage of a reference line which is ship type and size specific. The reference line is the best fit of the estimated index values (a simplified EEDI which is calculated using default factors for specific fuel consumption, auxiliary engines, and does not take ice class or fuel saving technologies into account). Over time, the distance to the reference line has to increase, as shown in the table below.

Table 48: Reduction factors (in percentage) for the EEDI relative to the EEDI Reference line.

|  |                      | year of entry in the fleet     |                                |                                |                              |
|--|----------------------|--------------------------------|--------------------------------|--------------------------------|------------------------------|
|  |                      | Phase 0                        | Phase 1                        | Phase 2                        | Phase 3                      |
|  |                      | 1 Jan<br>2013 - 31<br>Dec 2014 | 1 Jan<br>2015 - 31<br>Dec 2019 | 1 Jan<br>2020 - 31<br>Dec 2024 | 1 Jan<br>2015 and<br>onwards |
| bulk carrier   | 20,000 dwt and above | 0                              | 10                             | 20                             | 30                           |
|  | 10,000 - 20,000 dwt  | n/a                            | 0 - 10                         | 0 - 20                         | 0 - 30                       |
| gas carrier  | 10,000 dwt and above | 0                              | 10                             | 20                             | 30                           |
|  | 2,000 - 10,000 dwt   | n/a                            | 0 - 10                         | 0 - 20                         | 0 - 30                       |
| tanker   | 20,000 dwt and above | 0                              | 10                             | 20                             | 30                           |
|  | 4,000 - 20,000 dwt   | n/a                            | 0 - 10                         | 0 - 20                         | 0 - 30                       |
| containership  | 15,000 dwt and above | 0                              | 10                             | 20                             | 30                           |
|  | 10,000 - 15,000 dwt  | n/a                            | 0 - 10                         | 0 - 20                         | 0 - 30                       |
| General cargo ship                                       | 15,000 dwt and above | 0                              | 10                             | 20                             | 30                           |
|  | 3,000 - 15,000 dwt   | n/a                            | 0 - 10                         | 0 - 20                         | 0 - 30                       |
| Refrigerated cargo carrier                               | 5,000 dwt and above  | 0                              | 10                             | 20                             | 30                           |
|  | 3,000 - 5,000 dwt    | n/a                            | 0 - 10                         | 0 - 20                         | 0 - 30                       |
| Combination carrier                                      | 20,000 dwt and above | 0                              | 10                             | 20                             | 30                           |
|  | 4,000 - 20,000 dwt   | n/a                            | 0 - 10                         | 0 - 20                         | 0 - 30                       |
| LNG Carrier  | 10,000 dwt and above | n/a                            | 10                             | 20                             | 30                           |
| Ro-ro cargo ship (vehicle carrier)                       | 10,000 dwt and above | n/a                            | 5                              | 15                             | 30                           |
| Ro-ro cargo ship   | 2,000 dwt and above  | n/a                            | 5                              | 20                             | 30                           |
|  | 1,000 - 2,000 dwt    | n/a                            | 0 - 5                          | 0 - 20                         | 0 - 30                       |
| Ro-ro passenger ship                                     | 1,000 dwt and above  | n/a                            | 5                              | 20                             | 30                           |
|  | 250 - 1,000 dwt      | n/a                            | 0 - 5                          | 0 - 20                         | 0 - 30                       |
| Cruise passenger ship having non-conventional propulsion | 85,000 GT and above  | n/a                            | 5                              | 20                             | 30                           |
|  | 25,000 - 85,000 dwt  | n/a                            | 0 - 5                          | 0 - 20                         | 0 - 30                       |

Source: MEPC 62/24/Add.1, MEPC 66/WP.10/Add.1

### ***EEDI baseline and Specific fuel oil consumption***

The reference line which is used to calculate the required EEDI is the best fit of the EIVs of ships built between 1999 and 2009. The EIV is a simplified form of the EEDI. It assumes an SFOC of 190 g/kWh for main engines and 215 g/kWh for auxiliaries.

A number of recent publications find that the average SFOC of engines currently entering the fleet is lower. CE Delft (2013) finds on the basis of an analysis of the Clarksons Database, modern ships have an average SFOC of approximately 175 g/kWh. Kristensen (2012) finds that modern marine diesel engines have SFOCs of 170 g/kWh. Buhaug et al. (2009) use an SFOC range from 170 g/kWh for 2-stroke slow speed engines to 210 g/kWh for 4-stroke high speed engines. For large engines (> 5000 kW), which are typically used in ships that have to comply with the EEDI, SFOC ranges from 165 g/kWh to 185 g/kWh.

In sum, there is evidence that the average SFOC of modern engines is about 175 g/kWh rather than the 190 g/kWh assumed in the calculation of the reference line. Assuming that the SFOC of auxiliary engines is correct, and that auxiliary engines account for 5% of the total engine power (following MEPC.212(63)), the efficiency improvement is 7.5% less than the required reduction factors.

Because very few ships have been built with an EEDI, there is no ex-post information about the impact of the EEDI on operational efficiency of ships. Ex-ante evaluations of the EEDI generally assume that design efficiency and operational efficiency are positively correlated and that operational efficiency improves proportionally to design efficiency. We follow this assumption and assume that design and operational efficiency are positively correlated and move proportionally.

EEDI stringency will result in more efficient designs. Due to the assumptions on the specific fuel consumption (SFOC) of the main engine in the calculation of the reference lines, we expect the efficiency improvements to be smaller than the value of the required reduction factors. Assuming that the SFOC of auxiliary engines is correct, and that auxiliary engines account for 5% of the total engine power (following MEPC.212(63)), the efficiency improvement is 7.5% less than the required reduction factors.

**Table 49: Impact of the SFC on EEDI efficiency improvements.**

| <b>Reduction relative to original baseline</b> | <b>Reduction relative to baseline, taking SFC into account</b> |
|--|--|
| 0%   | -7.5%  |
| 10%  | 2.5%   |
| 20%  | 12.5%  |
| 30%  | 22.5%  |

### ***Impact of EEDI on emissions of new builds***

Bazari and Longva (2011) assume that the current normal distribution of attained EEDI will change to a skewed distribution with a peak just below the limit value. As a result, the improvement in the average attained EEDI will be larger than the required improvement of the EEDI (see figure below). As the figure shows, the difference between the average improvements and the face value of the required improvements diminishes with increasing stringency.

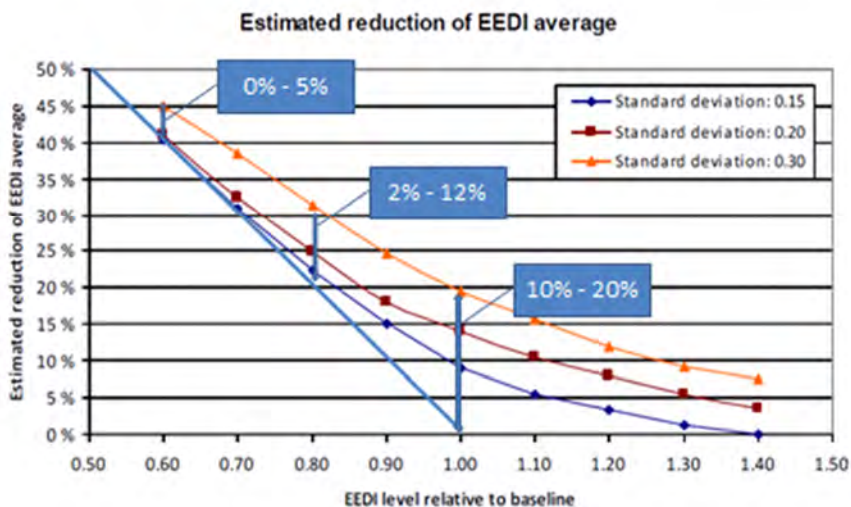


Figure 49: impact of the Poisson distribution on EEDI efficiency improvements.

Bazari and Longva (2011) conclude that waivers are unlikely to be used, as they bring risks and costs but no benefits

Anink and Krikke (2011) calculate EEDI reduction factors assuming that all ships above the line improve their EEDI to the reference line and others will not act. Their results indicate that the improvement in efficiency is smaller than the value of the reduction, but it is not clear whether this is due to the fact that many small ships are included in the sample, which are exempt from the EEDI or have a lower reduction target, or whether this is due to their methodology.

Hence, there are two views on what the impact of EEDI regulation on new designs would be. One view is that it would improve the efficiency of all new ships, except for the most efficient ones. The other is that only the design of ships above the reference line would be affected. Both result in an average improvement in design efficiency that is larger than the reduction factor. The exact improvement depends on the share of current ships that are above the baseline and on the stringency: the large the reduction relative to the baseline, the lower the difference between the average reduction and the required reduction.

In line with Bazari and Longva (2011, we propose to assume that the average efficiency improvement of new ships increases from 3% in phase 0 to 22.5% in phase 3 according to the table below as a result of the Poisson distribution of ship efficiency.

Table 50: impact of the Poisson distribution on EEDI efficiency improvements.

| Required reduction relative to baseline | Average efficiency improvements of new builds, relative to corrected baseline | Average efficiency improvements of new builds, relative to baseline |
|---|---|---|
| 0%                                      | 10%   | 3%  |
| 10%                                     | 17%   | 11%   |
| 20%                                     | 24%   | 18%   |
| 30%                                     | 30%   | 22.5%   |

We follow Bazari and Longva (2011) in their analysis that it is unlikely that ship owners will apply for a waiver.

#### ***Impact of SEEMP on emissions***

Bazari and Longva (2011) identify great uncertainty surrounding the effects of the SEEMP. They speculate that 30% to 60% of the cost-effective operational measures will be implemented as a result of SEEMP.

Johnson et al. (2013) compare the SEEMP with the energy management ISO norm (500001) and with the ISM code, and conclude that the SEEMP lacks a number of factors that are considered to be crucial to the success of ISO and ISM, such as the establishment of a baseline and setting goals, (top) management involvement, and dealing with non-conformities. They conclude that 'these gaps are detrimental to the success of the SEEMP'.

In sum, there is no established way of estimating the impact of the SEEMP. It seems likely that only cost-effective efficiency improvements will be implemented. The current energy-efficiency gap could be reduced, but this need not necessarily be the case.

In our model, energy efficiency options are implemented as they become cost-effective in the marginal abatement cost curve. We assume that 25% of the potential will not be realised due to barriers to the implementation of cost effective measures (CE Delft et al, 2012) and uncertainty about the benefits. We assume that the current level of unimplemented options will remain stable over time.

#### ***Long term efficiency improvements***

This section provides an overview of the literature on efficiency improvements between 2030 and 2050.

Buhaug et al. (2009) estimate on the basis of the results of a Delphi panel that the efficiency of ships in 2050 could improve by 25% - 75% over 2007 levels (see table below). Of this, 5% - 15% are attributed to low carbon fuels which are modelled as changes in emission factors and not as efficiency improvements in our model. A further unspecified but large share is attributed to speed, which is dealt with elsewhere in our model. All the non-speed and non-fuel options together result in a 50% efficiency improvement. Adding another 10% to take the non-speed elements of the category 'concept, speed and capability' into account, we estimate the resulting efficiency improvement over 2007 levels at maximally 60%.

**Table 51 Assessment of potential reductions of CO<sub>2</sub> emissions from shipping by using known technology and practices (from IMO GHG Study 2009).**

|  | Saving of CO <sub>2</sub> /tonne-mile | Combined                | Combined                |
|--|---------------------------------------|-------------------------|-------------------------|
| <b>DESIGN (New ships)</b>                |                                       |                         |                         |
| Concept, speed and capability            | 2% to 50% <sup>†</sup>                |                         |                         |
| Hull and superstructure                  | 2% to 20%                             |                         |                         |
| Power and propulsion systems             | 5% to 15%                             | 10% to 50% <sup>†</sup> |                         |
| Low-carbon fuels                         | 5% to 15%*                            |                         |                         |
| Renewable energy                         | 1% to 10%                             |                         | 25% to 75% <sup>†</sup> |
| Exhaust gas CO <sub>2</sub> reduction    | 0%                                    |                         |                         |
| <b>OPERATION (All ships)</b>             |                                       |                         |                         |
| Fleet management, logistics & incentives | 5% to 50% <sup>†</sup>                |                         |                         |
| Voyage optimization                      | 1% to 10%                             | 10% to 50% <sup>†</sup> |                         |
| Energy management                        | 1% to 10%                             |                         |                         |

\* CO<sub>2</sub> equivalent, based on the use of LNG.

† Reductions at this level would require reductions of operational speed.

MEPC 59/4/35 and MEPC 59/INF.27 (Japan) present case-studies of efficiency-improvements of ships. The case-studies combine improvements from ship size increases, speed reduction and the implementation of new technologies. Since our model addresses speed reduction and ship size separately (and we have written other discussion notes on these), we focus here on the impact of implementation of new technologies. Japan estimates these to improve efficiency by 30% to 40% in 2040, while emphasizing that just a selection of technologies have been included.

Eide et al (2013) conclude that the cost-effective abatement potential in 2050 is in the order of 50%, assuming that LNG, biofuels and nuclear propulsion become viable options to replace fossil fuels. More precisely, they project the cost-effective efficiency improvement to be between 35% and 52%. Alternative fuels account for 0% - 38% of this improvement potential, with the higher shares being associated with the higher efficiency gains. Hence, exclusive of fuels, the cost-effective abatement potential appears to be 15% - 35%.

In sum, there is consensus that there is potential to improve the efficiency of ships further after 2030. The potential and especially the cost-effective potential are uncertain. It is likely that efficiency improvements will continue after 2030, although it is impossible to decide at this moment which share of the improvements will be market-driven and which share will be regulation-driven. Because of the high uncertainty of technological development over such a timescale, we will use two scenarios. One scenario coincides with the highest estimates in the literature, excluding speed and alternative fuels which are accounted for elsewhere. The second scenario has more conservative estimates.



### Conclusion

We assume that the EEDI will drive efficiency improvements as shown in the table below for ships entering the fleet during the phases 0 through 3.

**Table 52: Impact of EEDI on operational efficiency of new ships.**

|                            |                      | year of entry in the fleet     |                                |                                |                              |
|----------------------------|----------------------|--------------------------------|--------------------------------|--------------------------------|------------------------------|
|                            |                      | Phase 0                        | Phase 1                        | Phase 2                        | Phase 3                      |
|                            |                      | 1 Jan<br>2013 - 31<br>Dec 2014 | 1 Jan<br>2015 - 31<br>Dec 2019 | 1 Jan<br>2020 - 31<br>Dec 2024 | 1 Jan<br>2015 and<br>onwards |
| bulk carrier               | 20,000 dwt and above | 3                              | 11                             | 17                             | 22.5                         |
|                            | 10,000 - 20,000 dwt  | n/a                            | 0 - 11                         | 0 - 17                         | 0 - 22.5                     |
| gas carrier                | 10,000 dwt and above | 3                              | 11                             | 17                             | 22.5                         |
|                            | 2,000 - 10,000 dwt   | n/a                            | 0 - 11                         | 0 - 17                         | 0 - 22.5                     |
| tanker                     | 20,000 dwt and above | 3                              | 11                             | 17                             | 22.5                         |
|                            | 4,000 - 20,000 dwt   | n/a                            | 0 - 11                         | 0 - 17                         | 0 - 22.5                     |
| containership              | 15,000 dwt and above | 3                              | 11                             | 17                             | 22.5                         |
|                            | 10,000 - 15,000 dwt  | n/a                            | 0 - 11                         | 0 - 17                         | 0 - 22.5                     |
| General cargo ship         | 15,000 dwt and above | 3                              | 11                             | 17                             | 22.5                         |
|                            | 3,000 - 15,000 dwt   | n/a                            | 0 - 11                         | 0 - 17                         | 0 - 22.5                     |
| Refrigerated cargo carrier | 5,000 dwt and above  | 3                              | 11                             | 17                             | 22.5                         |
|                            | 3,000 - 5,000 dwt    | n/a                            | 0 - 11                         | 0 - 17                         | 0 - 22.5                     |
| Combination carrier        | 20,000 dwt and above | 3                              | 11                             | 17                             | 22.5                         |
|                            | 4,000 - 20,000 dwt   | n/a                            | 0 - 11                         | 0 - 17                         | 0 - 22.5                     |

We assume that the SEEMP will result in operational improvements to the extent that they are cost-effective. We assume that the current level of unimplemented options will remain stable over time.

For efficiency improvements after 2030, we use two scenarios. The first scenario has a large increase after 2030, the second a smaller increase.

Table 53: Efficiency improvements in the period 2030 – 2050.

| Scenario | Efficiency improvement in 2050 relative to 2012 levels |
|----------|--|
| 1        | 60%  |
| 2        | 40%  |

## Fuel mix

### Market and regulatory drivers

There are two factors that will mainly determine the future bunker fuel mix of international shipping:

1. the relative costs of using the alternative fuels and
2. the relative costs of the sector's alternative options for compliance with environmental regulation.

The relative costs of using the alternative fuels depend on the relative price of the fuels, the availability of the fuels, retrofitting costs, if necessary, possible differences in prices for ships, new build or second-hand, as well as revenue changes associated with a possible change of cargo capacity.

If compliance with environmental regulation can be ensured by the use of certain fuels, ship owners will weigh the costs of using the fuels against of the costs of other compliance options.

The environmental regulation that can be expected to have the greatest impact on the future fuel mix are the SO<sub>x</sub> and NO<sub>x</sub> limits set by the IMO (Regulation 13 and 14 of MARPOL Annex VI) that will become more stringent in the future and that will also hold in Emission Control Areas that may additionally be established in the future.

SO<sub>x</sub> controls of Regulation 14 apply to all fuel oil combustion equipment and devices onboard ships. The regulation limits the maximum sulphur content of the fuel oil used and knows two different stringency levels: one stringency level that holds in SO<sub>x</sub> Emission Control Areas (SECAs) and another, less stringent level, outside the SECAs, also referred to as global requirements (see Table 54).

Table 54: IMO sulphur requirements.

| Outside ECA (global requirement)         | Inside ECA                            |
|--|---------------------------------------|
| 4.50% m/m <i>prior</i> to 1 January 2012 | 1.50% m/m <i>prior</i> to 1 July 2010 |
| 3.50% m/m on and after 1 January 2012    | 1.00% m/m on and after 1 July 2010    |
| 0.50% m/m on and after 1 January 2020*   | 0.10% m/m on and after 1 January 2015 |

Source: IMO (2014a); \* depending on the outcome of a review, to be concluded in 2018, as to the availability of the required fuel oil, this date could be deferred to 1 January 2025.

Four SECAs have been established in 2014 yet (see Table 55).

Table 55: Emission Control Areas established in 2014.

|                                  | SOx ECA | NOx ECA |
|----------------------------------|---------|---------|
| Baltic Sea area                  | X       |         |
| North Sea area                   | X       |         |
| North American area              | X       | X       |
| United States Caribbean Sea area | X       | X       |

Source: IMO (2014b).

After 2012, the base year of this study, the sulphur requirements in- and outside the SECA will become more stringent. From beginning of 2015 on, the maximum sulphur content of fuel oil is not allowed to exceed 0.1% m/m inside the SECAs and, depending on the availability of the required fuel oil, either from 2020 or from 2025 on, 0.5% m/m outside the SECA.

In principle, there are two ways of complying with these sulphur requirements. Using fuel oil with the required sulphur content is the primary method, cleaning the exhaust gasses to prevent sulphur oxide emissions the secondary.

Fuel types that fulfil global 2020/2025 (0.5%) as well as the 2015 SECA (0.1%) requirements are distillates, LNG, biofuels and other liquid or gaseous fuel options that can be used in dual fuel engines like for example LPG, Methanol, Ethanol, Di-Methyl Ether.<sup>4</sup>

The global 0.5% requirement can be met by mixing low and high sulphur fuel (concawe, 2012), whereas this is not possible for the SECA 2015 requirement of 0.1% (TransBaltic, 2012).

Also low sulphur HFO (LSHFO) can only be expected to fulfil the global 0.5% and not the 0.1% sulphur requirement. LSHFO can either be produced from very low sulphur crude oils or, alternatively, high sulphur residues are treated to produce low sulphur marine bunkers. HFO containing less than 0.5% sulphur is obtained from crude oil with sulphur content less than ~0.15%. The level of sulphur content of crude oil needed to produce HFO with 0.1% sulphur content is even lower. Not only are such crude oils rare, they are also highly paraffinic, waxy crude oils which would be unsuitable for heavy fuel oil production for marine bunkers due to their high pour points (TransBaltic, 2012). But even if only LSHFO with a 0.5% sulphur content was produced for use in maritime shipping, an investment of refineries in further desulphurization of high sulphur residues would be inevitable since the low sulphur vacuum gas oil (heavy oil left-over that can be further refined in a catalytic cracking unit) is currently used as feedstock for other purposes and since next to the maritime shipping sector there are hardly any other users of the high sulphur residues (Purvin & Gertz, 2009).

Since the SECA sulphur limit is lower than the global SECA limit, ships which operate both outside and inside the SECA have the compliance option to switch fuel when entering the SECA if their fuel oil combustion equipment and devices allows this.

Next to using fuel with the required sulphur content, scrubbers for exhaust gas cleaning can be used as a secondary compliance method. When a scrubber is used,

<sup>4</sup> See DNV GL (2014) for an overview on alternative fuels for shipping.

the ship does not have to use a fuel other than HFO but the use of a scrubber will raise energy demand slightly.

Regulation 13 of MARPOL Annex VI sets NO<sub>x</sub> emission limits for installed marine diesel engines of over 130 kW output power. The requirements limit the total weighted cycle emissions in terms of g/kWh and depend on the date of the construction of a ship and on the engines' rated speed. Currently, no specific stringency levels hold for NO<sub>x</sub> Emission Control Areas (NECAs), but ships constructed on or after 1 January 2016, will have to comply with NO<sub>x</sub> Tier III standards when operating in the North American ECA or the US Caribbean Sea ECA, which are already designated NECAs. In addition, Tier III requirements will apply to installed marine diesel engines when operated in other NECAs which might be designated in the future. However, Tier III will then apply to ships constructed on or after the date of adoption by the MEPC of such an ECA, or a later date as may be specified in the amendment designating the NO<sub>x</sub> Tier III ECA. (IMO, 2014c).

**Table 56: IMO NO<sub>x</sub> limits.**

| Tier | Geographical scope                           | Ship construction date on or after | Total weighted cycle emission limit (g/kWh)<br>n = engine's rated speed (rpm) |                         |          |
|------|--|------------------------------------|---|-------------------------|----------|
|      |  |                                    | n < 130   | n = 130 - 1999          | n ≥ 2000 |
| I    | Global.                                      | 1 January 2000                     | 17.0  | 45 * n <sup>-0.2</sup>  | 9.8      |
| II   | Global.                                      | 1 January 2011                     | 14.4  | 44 * n <sup>-0.23</sup> | 7.7      |
| III  | In North American and US Caribbean Sea ECAs. | 1 January 2016                     | 3.4   | 9 * n <sup>-0.2</sup>   | 2.0      |

Source: IMO (2014d).

Whereas the global Tier I and Tier II requirements can be met by adjustments in engine design and calibration this is not the case for the Tier III requirements which are 80% stricter than Tier I limits.

In their final report the Correspondence Group on Assessment of Technological Developments to Implement the Tier III NO<sub>x</sub> Emissions Standards (MEPC 65/4/7), identified the following technologies to have the potential to achieve NO<sub>x</sub> Tier III limits, either alone or in some combination with each other:

1. Selective Catalytic Reduction (SCR),
2. Exhaust Gas Recirculation (EGR),
3. The use of LNG, either dual-fuel (diesel pilot injection with gaseous LNG as main fuel) or alternative fuel arrangements, and
4. Other technologies: direct water injection, humid air motor, scrubbers, treated water scrubber, variable valve timing and lift, Dimethyl Ether as an alternative fuel.

#### **Fuel mix scenarios used in emissions projection model**

The fuel mix is an exogenous variable in the CO<sub>2</sub> emissions projection model. It has two effects on the estimated emissions. On the one hand, there is the direct effect on the CO<sub>2</sub> emissions due to the different CO<sub>2</sub> emissions factors of the fuels, and second, there is an indirect effect via the cost efficiency of the CO<sub>2</sub> abatement measures. If ships decide to comply with the air pollution regulation by switching from HFO to MGO, the CO<sub>2</sub> abatement measure will become relative more cost effective since MGO is more expensive than HFO.

In Table 57 the main compliance options of Regulation 13 and 14 of MARPOL Annex VI, the main drivers for the future fuel mix, are given.

**Table 57: Main compliance options for Regulation 13 and 14 of MARPOL Annex VI.**

|                       | Global 0.5% m/m sulphur limit | SECA 0.1% m/m sulphur limit | NECA Tier III NOx limit |
|-----------------------|-------------------------------|-----------------------------|-------------------------|
| LSHFO                 | X                             |                             |                         |
| Distillates           | X                             | X (MGO)                     |                         |
| LNG                   | X                             | X                           | X                       |
| HFO + Scrubber        | X                             | X                           |                         |
| Distillates + SCR/EGR |                               | X                           | X                       |

Note that in an area that is established as a SECA and a NECA (with Tier III requirements), only two main options seem to be viable currently, i.e. the use of LNG or the use of distillates together with SCR/EGR because it is unclear at the moment whether the combination of HFO, scrubbers and SCR/EGR is technically feasible.

As explained above, ship owners will probably choose the compliance option with the lowest relative costs for the operational profile of their ships. The optimal compliance option will thereby most likely differ per ship type, size and the specific trades. Together with the fact that the technical compliance options are still evolving and currently not produced at a large scale, making a cost estimate for 2050 very uncertain, and the fact that the development of the LNG infrastructure and the LNG bunker prices are highly uncertain, we decided not derive fuel mix scenario based on compliance cost estimations for 2050 but to set up plausible fuel mix scenarios. We thereby differentiate two scenarios: a High LNG Case in which we assume that extra ECAs will be established in the future and a Low LNG Case in which we assume that no extra ECAs will be established in the future.

The share of LNG in the fuel mix in the two scenarios is derived from the literature.

In DNV (2012), four scenarios are considered which differ with respect to economic growth, fuel prices and the environmental regulatory pressure and other characteristics like the access to capital. In 2020, the highest share of LNG amounts to 9% in a scenario with relative high economic growth, relative high HFO and MGO prices but a very low LNG bunker price that is decoupled from the HFO price, with high pressure from environmental regulation (ECAs in all coastal areas and a high carbon price) and high access to capital. The scenario with the lowest share of LNG (2%) in 2020 is a scenario with relative low economic growth, moderate fuel prices where the LNG price is not being decoupled from the HFO price, with again a high pressure from environmental regulation (ECAs in all coastal areas and a carbon price that is lower than in the high LNG case) and low/limited access to capital.

In Lloyd's Register Marine and UCL Energy Institute (2014), the 2030 fuel mix for the main ship types, i.e. container ships, dry bulk carriers, general cargo ships and tankers is estimated. In one scenario a relative low share of LNG is found for 2030 (4% in Competing Nations Scenario), whereas in the other two scenarios (Status Quo and Global Commons) a share of around 11% is expected respectively. However, non of the three scenarios considers an early (2020) switch to the global 0.5% sulphur requirement or the establishment of further ECAs which is why we take the LNG share to be higher in the high LNG case.

In the following table the fuel mix scenarios used for the emissions projection are presented.

**Table 58: Fuel mix scenarios used for emissions projection (%m/m).**

| High LNG Case/<br>extra ECAs | LNG share | Distillates<br>and<br>LSHFO* | HFO |
|------------------------------|-----------|------------------------------|-----|
| 2012                         | 0%        | 15%                          | 85% |
| 2020                         | 10%       | 30%                          | 60% |
| 2030                         | 15%       | 35%                          | 50% |
| 2050                         | 25%       | 35%                          | 40% |

| Low LNG Case/<br>no extra ECAs | LNG share | Distillates<br>And<br>LSHFO* | HFO |
|--------------------------------|-----------|------------------------------|-----|
| 2012                           | 0%        | 15%                          | 85% |
| 2020                           | 2%        | 25%                          | 73% |
| 2030                           | 4%        | 25%                          | 71% |
| 2050                           | 8%        | 25%                          | 67% |

\*Sulphur content of 1% in 2012 and of 0.5% from 2020 on.

In both scenarios we assume that the global 0.5% sulphur requirement will become effective in 2020. A later enforcement (2025) is accounted for in a sensitivity analysis.

Also in both scenarios we assume that in 2020, 60% of the fuel consumption of the fleet (in terms of tons) consists of HFO. In the scenario where extra ECAs are assumed to be established this share decreases over time, whereas in the other scenario not. The share of the distillates then follows.

## Emission factors

### Emission factors

All emissions analysed here, except for HFC, PFC and SF<sub>6</sub>, result from fuel combustion and are therefore calculated by multiplying fuel consumption with an emissions factor. The emission factors depend on the type of fuel, where we distinguish between residual fuel oil (HFO), low sulphur fuel oil (LSFO), marine gas oil (MGO, a distillate fuel) and LNG. Emission factors may also be affected by engine modifications (e.g. exhaust gas recirculation, EGR), or exhaust gas treatment (e.g. selective catalytic reduction, SCR, or sulphur scrubbers). Some of these technologies to reduce emissions have a fuel penalty, others, such as SCR, allow for optimisation of the fuel-efficiency of the engine and may result in a fuel-efficiency improvement. The fuel penalties are typically in the order of a percent, while the possible improvements may be larger. We do not make assumptions about the specific ways in which ships meet standards and we ignore fuel penalties or efficiency improvements, as these are small relative to the inherent uncertainties in the emission projections.

Below, separate sections per species present the emission factors in the base year and in future years.

### CO<sub>2</sub>

The emission factors of CO<sub>2</sub> are expressed per tonne of fuel. For each fuel type, they remain constant over time. When calculating the emissions of LNG engines, we take

into account that the break specific fuel consumption (SFOC) of LNG is 15% lower than the SFOC of HFO.

**Table 59 CO<sub>2</sub> emission factors (g/g fuel).**

| Region | Fuel type | year  |       |       |
|--------|-----------|-------|-------|-------|
|        |           | 2012  | 2030  | 2050  |
| Global | HFO       | 3,114 | 3,114 | 3,114 |
|        | LSFO      | 3,114 | 3,114 | 3,114 |
|        | MGO       | 3,206 | 3,206 | 3,206 |
|        | LNG       | 2,75  | 2,75  | 2,75  |

#### CH<sub>4</sub>

Methane emissions result from combustion of heavy fuel oils and distillates and from incomplete emissions of LNG. The emission factors are constant over time.

**Table 60: CH<sub>4</sub> emission factors (g/g fuel).**

| Region | Fuel type | year    |         |         |
|--------|-----------|---------|---------|---------|
|        |           | 2012    | 2030    | 2050    |
| Global | HFO       | 0.00006 | 0.00006 | 0.00006 |
|        | LSFO      | 0.00006 | 0.00006 | 0.00006 |
|        | MGO       | 0.00006 | 0.00006 | 0.00006 |
|        | LNG       | 0.05    | 0.05    | 0.05    |

#### N<sub>2</sub>O

Nitrous oxide results from the combustion of fuels. Its emission factors are constant over time.

**Table 61: N<sub>2</sub>O emission factors (g/g fuel).**

| Region | Fuel type | year     |          |          |
|--------|-----------|----------|----------|----------|
|        |           | 2012     | 2030     | 2050     |
| Global | HFO       | 0.00015  | 0.00015  | 0.00015  |
|        | LSFO      | 0.00015  | 0.00015  | 0.00015  |
|        | MGO       | 0.00016  | 0.00016  | 0.00016  |
|        | LNG       | 0.000108 | 0.000108 | 0.000108 |

#### HFC

Emissions from HFC result from leakages from cooling systems and airconditioners. They do not emerge from fuel combustion but are assumed to be driven by the number of ships. There are several HFCs with different global warming potentials. The most relevant are:

**Table 62: HFCs used on board ships.**

| Species | GWP  | Notes  |
|---------|------|--|
| R-22    | 1810 | R-22 (chlorodifluoromethane) has been the dominant refrigerant in air conditioners used aboard ships. The production of R-22 has been phased out under the Montreal Protocol in many countries. We assume that it is only used in the fleet built before 2000. |
| R-134a  | 1300 | R134a (1,1,1,2-Tetrafluoroethane) is used as a replacement for R-22 in ships built from 2000 onwards   |
| R-404a  | 3700 | R404a is a mixture of R125,R143a and R134a. It is used in predominantly in fishing ships but also in other ships in freezing and cooling equipment.  |

Assuming that ships built before 2000 have a 25-year lifetime, R-22 will have become obsolete in shipping by 2025. We do not model that other HFCs will be phased-out, that air conditioner leakage rates will change or that other coolants will replace HFCs. Under these assumptions, the following emissions per ship are calculated:

**Table 63: HFC emissions per ship (tonnes per year).**

|                       | 2012  |        |        | 2030 |        |        | 2050 |        |        |
|-----------------------|-------|--------|--------|------|--------|--------|------|--------|--------|
|                       | R-22  | R-134a | R-404a | R-22 | R-134a | R-404a | R-22 | R-134a | R-404a |
| Bulk carrier          | 0.031 | 0.031  | 0.002  | 0    | 0.06   | 0.004  | 0    | 0.06   | 0.004  |
| Chemical tanker       | 0.024 | 0.038  | 0.003  | 0    | 0.06   | 0.004  | 0    | 0.06   | 0.004  |
| Container             | 0.027 | 0.035  | 0.002  | 0    | 0.06   | 0.004  | 0    | 0.06   | 0.004  |
| General cargo         | 0.037 | 0.025  | 0.002  | 0    | 0.06   | 0.004  | 0    | 0.06   | 0.004  |
| Liquefied gas tanker  | 0.031 | 0.031  | 0.002  | 0    | 0.06   | 0.004  | 0    | 0.06   | 0.004  |
| Oil tanker            | 0.023 | 0.039  | 0.003  | 0    | 0.06   | 0.004  | 0    | 0.06   | 0.004  |
| Other liquids tankers | 0.023 | 0.039  | 0.003  | 0    | 0.06   | 0.004  | 0    | 0.06   | 0.004  |
| Ferry-pax only        | 0.061 | 0.041  | 0.002  | 0    | 0.1    | 0.004  | 0    | 0.1    | 0.004  |
| Cruise                | 0.76  | 0.488  | 0.033  | 0    | 1.2    | 0.08   | 0    | 1.2    | 0.08   |
| Ferry-RoPax           | 0.071 | 0.032  | 0.001  | 0    | 0.1    | 0.004  | 0    | 0.1    | 0.004  |
| Refrigerated bulk     | 0.935 | 0.007  | 0.118  | 0    | 0.06   | 1      | 0    | 0.06   | 1      |
| Ro-Ro                 | 0.075 | 0.028  | 0.001  | 0    | 0.1    | 0.004  | 0    | 0.1    | 0.004  |
| Vehicle               | 0.027 | 0.034  | 0.002  | 0    | 0.06   | 0.004  | 0    | 0.06   | 0.004  |

#### PFC

The main application of PFCs on board ships that is of relevance is fire-fighting foams of the type AFFF (Aqueous Film-Forming Foam). In recent years, PFCs have



been phased out by major manufacturers. Therefore, and because leakage from remaining stockpiles is regarded as negligible, we do not project PFC emissions from international shipping.

#### SF<sub>6</sub>

Sulphur hexafluoride is not used on board ships to any significant degree. Supplies of SF<sub>6</sub> are distributed and transported in compressed gas cylinders. Significant emissions of SF<sub>6</sub> from shipping are not expected.

#### NO<sub>x</sub>

Nitrogen oxide is formed when oxygen and nitrogen react under high pressure or at high temperatures, such as in engines. NO<sub>x</sub> emissions from marine engines are regulated. Regulation 13 of Marpol Annex VI sets NO<sub>x</sub> emission limits for installed marine diesel engines of over 130 kW output power. The requirements limit the total weighted cycle emissions in terms of g/kWh and depend on the date of the construction of a ship and on the engines' rated speed. There are three stringency levels: Tier 1, Tier 2 and Tier 3. Tier 1 applies to ships built from 2000, Tier 2 to ships built from 2011, and Tier 3 will apply to ships constructed on or after 1 January 2016, but only when they are operating in current NO<sub>x</sub> emission control areas. For future emission control areas, Tier 3 will be required for ships built after the date of adoption by the MEPC of such an ECA, or a later date if agreed by MEPC.

While Tier 1 and 2 can be met by adjustments in engine design and calibration this is not the case for the Tier 3 requirements. The latter require either radically different engine designs (with exhaust gas recirculation), after treatment of exhaust gases (selective catalytic reduction) or other fuels (LNG).

For our emission projections, we assume that:

- All ships that have entered the fleet from 2000 to 2010 meet Tier 1
- All ships that enter the fleet from 2011 onwards meet Tier 2
- All ships that enter the fleet from 2016 onward comply with Tier 3 in ECAs. For modelling purposes, we assume that Tier 3 is met by using LNG. Compared to a scenario where ships would use SCR or EGR to comply with Tier 3 and LNG would be used by other ships, our modelling overestimates the total NO<sub>x</sub> emissions. In other words, our modelling is a conservative estimate of NO<sub>x</sub> emission reductions. In case we do not project enough LNG to meet NECA requirements, we assume that Tier 2 ships will be Tier 3 compliant when sailing in NECAs, and Tier 0 and Tier 1 ships will avoid NECAs.
- As stated above, we have two scenarios on ECAs and fuel use. The first scenario has a constant share of fuel used in ECAs, and we assume that half of the fuel consumption in current ECAs will be in NECAs from 2016, and the other half from 2025. The other scenario projects a doubling of the share of fuel used in ECAs. We assume that the NO<sub>x</sub> Tier 3 requirements for the new ECAs come into force in 2030.

**Table 64: NO<sub>x</sub> emission factors (g/g fuel).**

| Scenario                                    | Fuel type | Year   |        |        |
|---|-----------|--------|--------|--------|
|   |           | 2012   | 2030   | 2050   |
| Global average, low ECA, low LNG scenario   | HFO       | 0.0903 | 0.0825 | 0.0760 |
|   | MGO       | 0.0961 | 0.0877 | 0.0808 |
|   | LNG       | 0.0140 | 0.0140 | 0.0140 |
| Global average, high ECA, high LNG scenario | HFO       | 0.0903 | 0.0834 | 0.0690 |
|   | MGO       | 0.0961 | 0.0887 | 0.0734 |
|   | LNG       | 0.0140 | 0.0140 | 0.0140 |

Note: the lower emission factor for NO<sub>x</sub> in the low LNG scenario in 2030 is the result of the fact that this scenario requires more ships to use an SCR or EGR to meet tier 3 instead of switching to LNG.

#### NM VOC

The emissions of non methane volatile organic compounds result from incomplete combustion of fuels. They are assumed to be constant over time.

**Table 65: NM VOC emission factors (g/g fuel).**

| Region | Fuel type | Year    |         |         |
|--------|-----------|---------|---------|---------|
|        |           | 2012    | 2030    | 2050    |
| Global | HFO       | 0.00308 | 0.00308 | 0.00308 |
|        | LSFO      | 0.00308 | 0.00308 | 0.00308 |
|        | MGO       | 0.00308 | 0.00308 | 0.00308 |
|        | LNG       | 0.003   | 0.003   | 0.003   |

#### CO

The emissions of carbon monoxide result from incomplete combustion of fuels. They are assumed to be constant over time.

**Table 66: CO emission factors (g/g fuel).**

| Region | Fuel type | Year    |         |         |
|--------|-----------|---------|---------|---------|
|        |           | 2012    | 2030    | 2050    |
| Global | HFO       | 0.00277 | 0.00277 | 0.00277 |
|        | LSFO      | 0.00277 | 0.00277 | 0.00277 |
|        | MGO       | 0.00277 | 0.00277 | 0.00277 |
|        | LNG       | 0.00783 | 0.00783 | 0.00783 |

#### PM

The emissions of particulate matter result from incomplete combustion of fuels and from the formation of sulphate particles, which is a result of sulphur emissions. They are assumed to be constant over time.

**Table 67: PM emission factors (g/g fuel).**

| Region | Fuel type | year    |         |         |
|--------|-----------|---------|---------|---------|
|        |           | 2012    | 2030    | 2050    |
| Global | HFO       | 0.00728 | 0.00728 | 0.00728 |
|        | LSFO      | 0.00426 | 0.00426 | 0.00426 |
|        | MGO       | 0.00097 | 0.00097 | 0.00097 |
|        | LNG       | 0.00018 | 0.00018 | 0.00018 |

## SO<sub>2</sub>

The emissions of SO<sub>2</sub> result from the combustion of sulphur that is present in petroleum derived fuels. The emission factors will decrease as a result of MARPOL Annex VI regulations.

**Table 68: SO<sub>2</sub> emission factors (g/g fuel).**

| Region | Fuel type | year  |       |       |
|--------|-----------|-------|-------|-------|
|        |           | 2012  | 2030  | 2050  |
| Global | HFO       | 0.025 | 0.005 | 0.005 |
|        | MGO       | 0.010 | 0.001 | 0.001 |
|        | LNG       | 0     | 0     | 0     |

## Detailed results

This section presents the emissions per scenario for 2012, 2020 and 2050.

Table 69 scenario 1 and 9 (RCP8.5, SSP5, GCAM 8.5, high efficiency).

|                         |              | 2012 | 2030 | 2050  |
|-------------------------|--------------|------|------|-------|
| <b>Greenhouse gases</b> |              |      |      |       |
| CO <sub>2</sub>         | low LNG      | 810  | 910  | 1.900 |
|                         | high LNG     | 810  | 890  | 1.800 |
| CH <sub>4</sub>         | low LNG      | 0,02 | 0,26 | 2,10  |
|                         | high LNG     | 0,02 | 1,20 | 6,50  |
| N <sub>2</sub> O        | low LNG      | 0,04 | 0,04 | 0,09  |
|                         | high LNG     | 0,04 | 0,04 | 0,09  |
| HFC                     |              | 37   | 40   | 79    |
| PFC                     |              | 0    | 0    | 0     |
| SF <sub>6</sub>         |              | 0    | 0    | 0     |
| <b>other substances</b> |              |      |      |       |
| NO <sub>x</sub>         | constant ECA | 24   | 26   | 49    |
|                         | more ECAs    | 24   | 24   | 40    |
| SO <sub>2</sub>         | constant ECA | 5,90 | 3,90 | 2,30  |
|                         | more ECAs    | 5,90 | 3,40 | 1,50  |
| PM                      | constant ECA | 1,70 | 1,60 | 3,30  |
|                         | more ECAs    | 1,70 | 1,40 | 2,10  |
| NMVOC                   | constant ECA | 0,80 | 0,89 | 1,90  |
|                         | more ECAs    | 0,80 | 0,88 | 1,80  |
| CO                      | constant ECA | 0,72 | 0,83 | 1,90  |
|                         | more ECAs    | 0,72 | 0,91 | 2,30  |

Table 70 scenario 2 and 10 (RCP6.0, SSP1, GCAM 6.0, high efficiency).

|                         |              | 2012 | 2030 | 2050  |
|-------------------------|--------------|------|------|-------|
| <b>Greenhouse gases</b> |              |      |      |       |
| CO2                     | low LNG      | 810  | 890  | 1.400 |
|                         | high LNG     | 810  | 870  | 1.400 |
| CH4                     | low LNG      | 0,02 | 0,25 | 1,60  |
|                         | high LNG     | 0,02 | 1,20 | 4,80  |
| N2O                     | low LNG      | 0,04 | 0,04 | 0,07  |
|                         | high LNG     | 0,04 | 0,04 | 0,06  |
| HFC                     |              | 37   | 39   | 61    |
| PFC                     |              | 0    | 0    | 0     |
| SF6                     |              | 0    | 0    | 0     |
| <b>other substances</b> |              |      |      |       |
| NOx                     | constant ECA | 24   | 25   | 37    |
|                         | more ECAs    | 24   | 24   | 30    |
| SO2                     | constant ECA | 5,90 | 3,80 | 1,70  |
|                         | more ECAs    | 5,90 | 3,30 | 1,10  |
| PM                      | constant ECA | 1,70 | 1,60 | 2,40  |
|                         | more ECAs    | 1,70 | 1,30 | 1,50  |
| NMVOC                   | constant ECA | 0,80 | 0,87 | 1,40  |
|                         | more ECAs    | 0,80 | 0,86 | 1,30  |
| CO                      | constant ECA | 0,72 | 0,81 | 1,40  |
|                         | more ECAs    | 0,72 | 0,89 | 1,70  |

Table 71 scenario 3 and 11 (RCP4.5, SSP3, RCP 4.5, high efficiency).

|                         |              | 2012 | 2030 | 2050 |
|-------------------------|--------------|------|------|------|
| <b>Greenhouse gases</b> |              |      |      |      |
| CO2                     | low LNG      | 810  | 870  | 850  |
|                         | high LNG     | 810  | 850  | 810  |
| CH4                     | low LNG      | 0,02 | 0,25 | 0,94 |
|                         | high LNG     | 0,02 | 1,20 | 2,90 |
| N2O                     | low LNG      | 0,04 | 0,04 | 0,04 |
|                         | high LNG     | 0,04 | 0,04 | 0,04 |
| HFC                     |              | 37   | 39   | 40   |
| PFC                     |              | 0    | 0    | 0    |
| SF6                     |              | 0    | 0    | 0    |
| <b>other substances</b> |              |      |      |      |
| NOx                     | constant ECA | 24   | 25   | 22   |
|                         | more ECAs    | 24   | 23   | 18   |
| SO2                     | constant ECA | 5,90 | 3,70 | 1,00 |
|                         | more ECAs    | 5,90 | 3,20 | 0,66 |
| PM                      | constant ECA | 1,70 | 1,60 | 1,40 |
|                         | more ECAs    | 1,70 | 1,30 | 0,92 |
| NMVOC                   | constant ECA | 0,80 | 0,86 | 0,84 |
|                         | more ECAs    | 0,80 | 0,84 | 0,81 |
| CO                      | constant ECA | 0,72 | 0,80 | 0,85 |
|                         | more ECAs    | 0,72 | 0,88 | 1,00 |

Table 72 scenario 4 and 12 (RCP2.6, SSP4, RCP 2.6, high efficiency).

|                         |              | 2012 | 2030 | 2050  |
|-------------------------|--------------|------|------|-------|
| <b>Greenhouse gases</b> |              |      |      |       |
| CO2                     | low LNG      | 810  | 870  | 1.100 |
|                         | high LNG     | 810  | 850  | 1.000 |
| CH4                     | low LNG      | 0,02 | 0,25 | 1,20  |
|                         | high LNG     | 0,02 | 1,20 | 3,60  |
| N2O                     | low LNG      | 0,04 | 0,04 | 0,05  |
|                         | high LNG     | 0,04 | 0,04 | 0,05  |
| HFC                     |              | 37   | 39   | 49    |
| PFC                     |              | 0    | 0    | 0     |
| SF6                     |              | 0    | 0    | 0     |
| <b>other substances</b> |              |      |      |       |
| NOx                     | constant ECA | 24   | 25   | 27    |
|                         | more ECAs    | 24   | 23   | 22    |
| SO2                     | constant ECA | 5,90 | 3,70 | 1,30  |
|                         | more ECAs    | 5,90 | 3,20 | 0,81  |
| PM                      | constant ECA | 1,70 | 1,60 | 1,80  |
|                         | more ECAs    | 1,70 | 1,30 | 1,10  |
| NMVOC                   | constant ECA | 0,80 | 0,86 | 1,00  |
|                         | more ECAs    | 0,80 | 0,84 | 1,00  |
| CO                      | constant ECA | 0,72 | 0,80 | 1,10  |
|                         | more ECAs    | 0,72 | 0,88 | 1,30  |

Table 73 scenario 5 and 13 (RCP8.5, SSP5, GCAM 8.5, low efficiency).

|                         |              | 2012 | 2030 | 2050  |
|-------------------------|--------------|------|------|-------|
| <b>Greenhouse gases</b> |              |      |      |       |
| CO2                     | low LNG      | 810  | 910  | 2.800 |
|                         | high LNG     | 810  | 890  | 2.700 |
| CH4                     | low LNG      | 0,02 | 0,26 | 3,10  |
|                         | high LNG     | 0,02 | 1,20 | 9,50  |
| N2O                     | low LNG      | 0,04 | 0,04 | 0,14  |
|                         | high LNG     | 0,04 | 0,04 | 0,13  |
| HFC                     |              | 37   | 40   | 110   |
| PFC                     |              | 0    | 0    | 0     |
| SF6                     |              | 0    | 0    | 0     |
| <b>other substances</b> |              |      |      |       |
| NOx                     | constant ECA | 24   | 26   | 72    |
|                         | more ECAs    | 24   | 24   | 59    |
| SO2                     | constant ECA | 5,90 | 3,90 | 3,30  |
|                         | more ECAs    | 5,90 | 3,40 | 2,20  |
| PM                      | constant ECA | 1,70 | 1,60 | 4,80  |
|                         | more ECAs    | 1,70 | 1,40 | 3,00  |
| NMVOC                   | constant ECA | 0,80 | 0,89 | 2,80  |
|                         | more ECAs    | 0,80 | 0,88 | 2,70  |
| CO                      | constant ECA | 0,72 | 0,83 | 2,80  |
|                         | more ECAs    | 0,72 | 0,91 | 3,40  |



Table 74 scenario 6 and 14 (RCP6.0, SSP1, GCAM 6.0, low efficiency).

|                         |              | 2012 | 2030 | 2050  |
|-------------------------|--------------|------|------|-------|
| <b>Greenhouse gases</b> |              |      |      |       |
| CO2                     | low LNG      | 810  | 890  | 2.100 |
|                         | high LNG     | 810  | 870  | 2.000 |
| CH4                     | low LNG      | 0,02 | 0,25 | 2,30  |
|                         | high LNG     | 0,02 | 1,20 | 7,10  |
| N2O                     | low LNG      | 0,04 | 0,04 | 0,10  |
|                         | high LNG     | 0,04 | 0,04 | 0,09  |
| HFC                     |              | 37   | 39   | 85    |
| PFC                     |              | 0    | 0    | 0     |
| SF6                     |              | 0    | 0    | 0     |
| <b>other substances</b> |              |      |      |       |
| NOx                     | constant ECA | 24   | 25   | 54    |
|                         | more ECAs    | 24   | 24   | 43    |
| SO2                     | constant ECA | 5,90 | 3,80 | 2,50  |
|                         | more ECAs    | 5,90 | 3,30 | 1,60  |
| PM                      | constant ECA | 1,70 | 1,60 | 3,50  |
|                         | more ECAs    | 1,70 | 1,30 | 2,30  |
| NMVOC                   | constant ECA | 0,80 | 0,87 | 2,10  |
|                         | more ECAs    | 0,80 | 0,86 | 2,00  |
| CO                      | constant ECA | 0,72 | 0,81 | 2,10  |
|                         | more ECAs    | 0,72 | 0,89 | 2,50  |

Table 75 scenario 7 and 15 (RCP4.5, SSP3, RCP 4.5, low efficiency).

|                         |              | 2012 | 2030 | 2050  |
|-------------------------|--------------|------|------|-------|
| <b>Greenhouse gases</b> |              |      |      |       |
| CO2                     | low LNG      | 810  | 870  | 1.200 |
|                         | high LNG     | 810  | 850  | 1.200 |
| CH4                     | low LNG      | 0,02 | 0,25 | 1,40  |
|                         | high LNG     | 0,02 | 1,20 | 4,20  |
| N2O                     | low LNG      | 0,04 | 0,04 | 0,06  |
|                         | high LNG     | 0,04 | 0,04 | 0,06  |
| HFC                     |              | 37   | 39   | 54    |
| PFC                     |              | 0    | 0    | 0     |
| SF6                     |              | 0    | 0    | 0     |
| <b>other substances</b> |              |      |      |       |
| NOx                     | constant ECA | 24   | 25   | 32    |
|                         | more ECAs    | 24   | 23   | 26    |
| SO2                     | constant ECA | 5,90 | 3,70 | 1,50  |
|                         | more ECAs    | 5,90 | 3,20 | 0,95  |
| PM                      | constant ECA | 1,70 | 1,60 | 2,10  |
|                         | more ECAs    | 1,70 | 1,30 | 1,30  |
| NMVOC                   | constant ECA | 0,80 | 0,86 | 1,20  |
|                         | more ECAs    | 0,80 | 0,84 | 1,20  |
| CO                      | constant ECA | 0,72 | 0,80 | 1,20  |
|                         | more ECAs    | 0,72 | 0,88 | 1,50  |

Table 76 scenario 8 and 16 (RCP2.6, SSP4, RCP 2.6, low efficiency).

|                         |              | 2012 | 2030 | 2050  |
|-------------------------|--------------|------|------|-------|
| <b>Greenhouse gases</b> |              |      |      |       |
| CO2                     | low LNG      | 810  | 870  | 1.500 |
|                         | high LNG     | 810  | 850  | 1.500 |
| CH4                     | low LNG      | 0,02 | 0,25 | 1,70  |
|                         | high LNG     | 0,02 | 1,20 | 5,20  |
| N2O                     | low LNG      | 0,04 | 0,04 | 0,07  |
|                         | high LNG     | 0,04 | 0,04 | 0,07  |
| HFC                     |              | 37   | 39   | 66    |
| PFC                     |              | 0    | 0    | 0     |
| SF6                     |              | 0    | 0    | 0     |
| <b>other substances</b> |              |      |      |       |
| NOx                     | constant ECA | 24   | 25   | 39    |
|                         | more ECAs    | 24   | 23   | 32    |
| SO2                     | constant ECA | 5,90 | 3,70 | 1,80  |
|                         | more ECAs    | 5,90 | 3,20 | 1,20  |
| PM                      | constant ECA | 1,70 | 1,60 | 2,60  |
|                         | more ECAs    | 1,70 | 1,30 | 1,70  |
| NMVOc                   | constant ECA | 0,80 | 0,86 | 1,50  |
|                         | more ECAs    | 0,80 | 0,84 | 1,40  |
| CO                      | constant ECA | 0,72 | 0,80 | 1,50  |
|                         | more ECAs    | 0,72 | 0,88 | 1,80  |